



Turtle Beach Ear Force XO Four Microphone Replacement

Replace a damaged or faulty microphone on the Turtle Beach Ear Force XO Four headset.

Written By: Cody Barrett



INTRODUCTION

This guide will exhibit how to replace the microphone board. Soldering is required to detach and replace the board, so refer to the soldering replacement guide for more information.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Microphone




- Gently remove the foam pad from the microphone by pulling it apart.

Step 2



- Remove the PH0 7.1 mm screw from the back casing.

Step 3

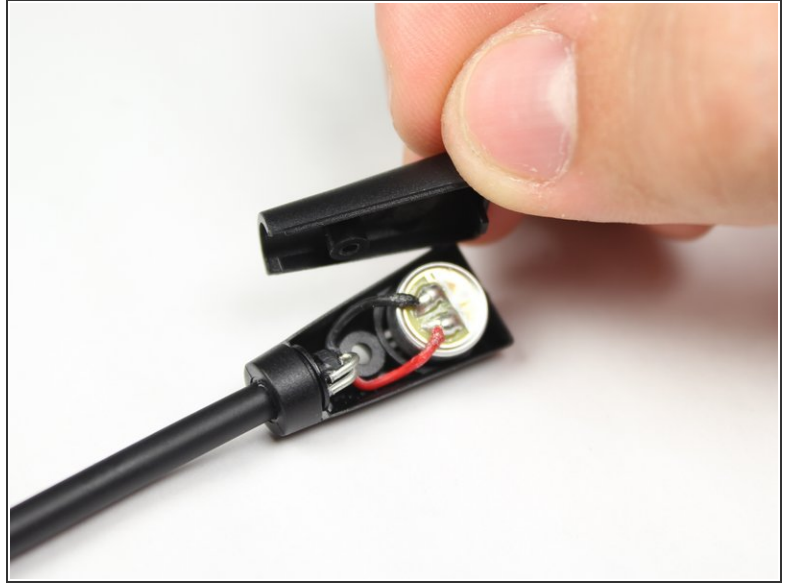

- Remove the back casing from the microphone.
- Desolder the two wires from the back of the microphone. For instructions on soldering, please see [iFixit's soldering guide](#).

To reassemble your device, follow these instructions in reverse order.