



# MacBook Pro 13" Unibody Mid 2010 Battery Replacement

Replace the battery in your MacBook Pro 13" Unibody Mid 2010.

Written By: Walter Galan



# INTRODUCTION

Replace the battery in your MacBook Pro 13" Unibody Mid 2010. If your battery is swollen, [take appropriate precautions](#).



## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tri-point Y0 Screwdriver](#) (1)



## PARTS:

- [MacBook Pro 13" Unibody \(Mid 2009 to Mid 2012\) Replacement Battery](#) (1)

## Step 1 — Remove the lower case screws



- Remove the following 10 screws securing the lower case to the MacBook Pro 13" Unibody:
  - Seven 3 mm Phillips screws.
  - Three 13.5 mm Phillips screws.

## Step 2 — Lift the lower case away



- Slightly lift the lower case and push it toward the rear of the computer to free the mounting tabs.




## Step 3 — Battery



- Remove the following tri-point screws securing the battery to the upper case:
  - One 5.5 mm tri-point screw.
  - One 13.5 mm tri-point screw.

## Step 4

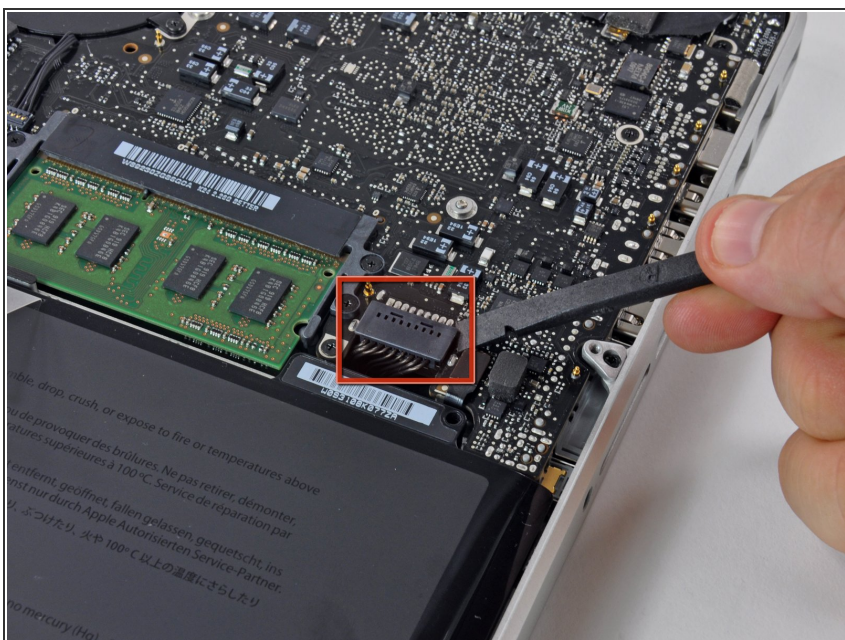

- Use the flat end of a spudger to lift the battery connector up out of its socket on the logic board.

- 

This document was generated on 2022-05-26 12:36:37 PM (MST).