


# Ozeri Pronto ZK14-S Button Replacement

This guide explains how to expose each of the...

Written By: Oneika White

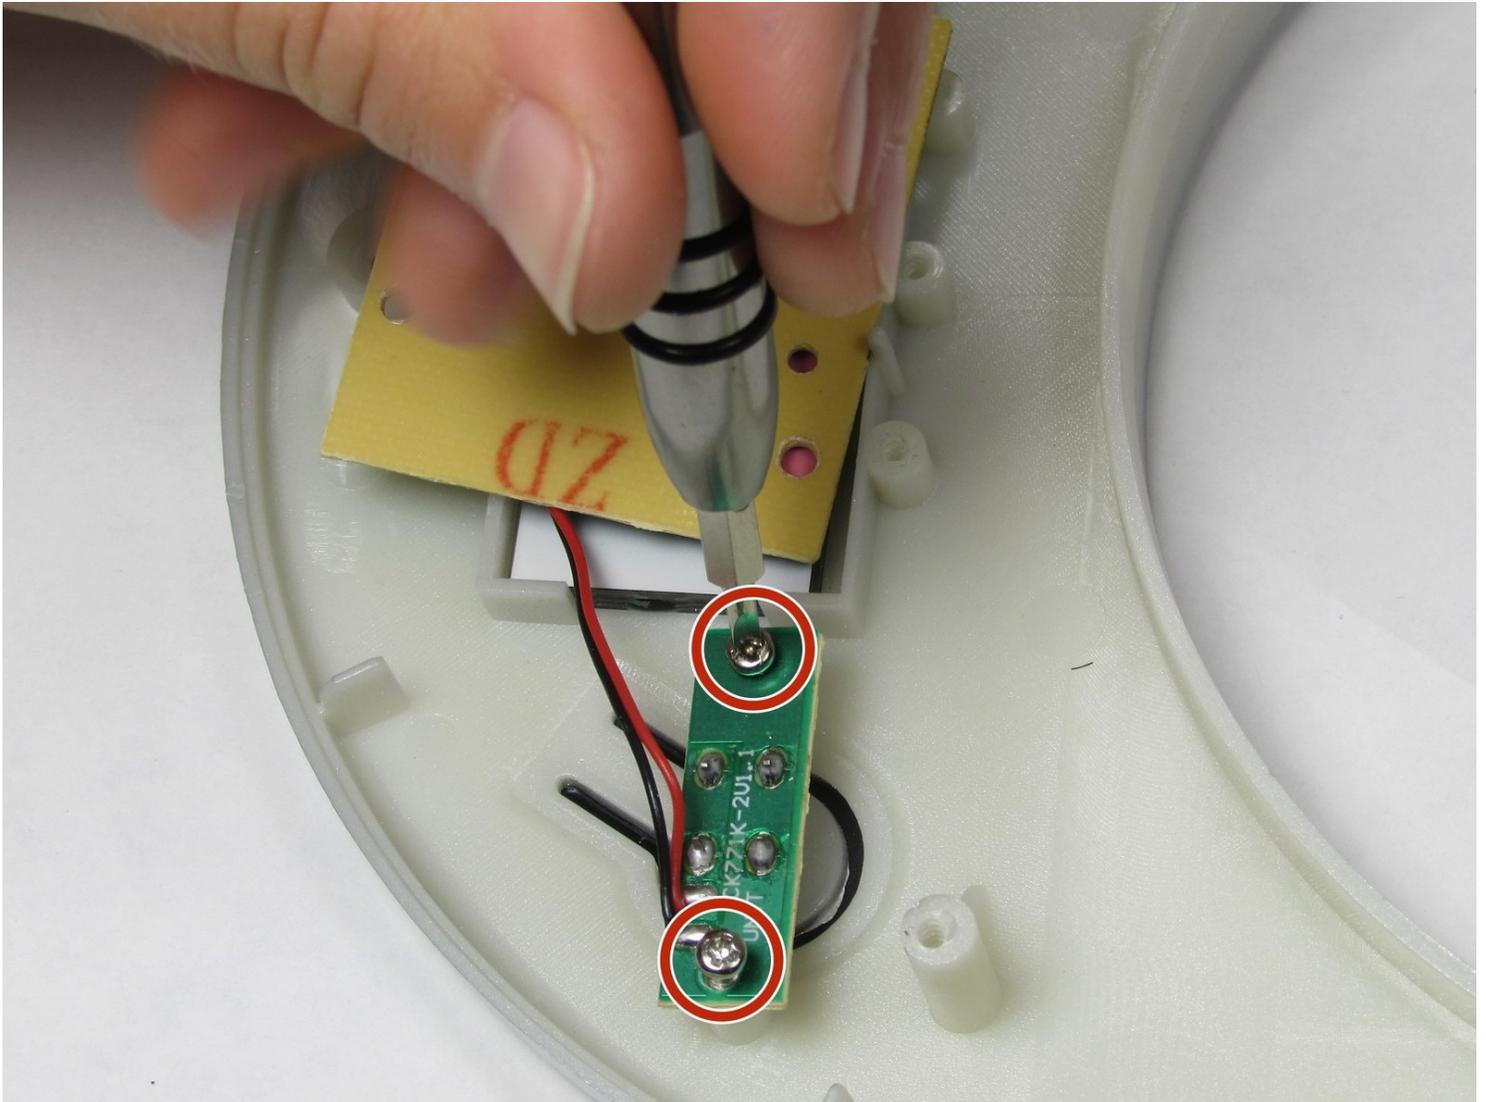

## INTRODUCTION

This guide explains how to expose each of the two buttons of the Ozeri Pronto ZK14-S in the same steps. Each button is attached to a different motherboard. A soldering iron will be necessary to remove the buttons from the motherboard. Please view the following link for detailed instructions on how to operate a soldering iron: [How To Solder and Desolder Connections](#)

---

### TOOLS:

2.0 Flathead screwdriver (1)

Portable Soldering Iron (1)

---

### Step 1 — Panel Removal



- Twist the plastic plate slowly to the left to pull it away.

## Step 2



- Pry off the sticker at the bottom where the “Ozeri” logo is to reveal a screw. The sticker does not need to be completely removed for the next step.

## Step 3





- Using the 2.0 Flathead screwdriver, remove the 9.50 mm Phillips head screw under the sticker.

## Step 4



- Using the 2.0 Flathead screwdriver, remove the two 18.76 mm Phillips head screws in the plate stand.

## Step 5

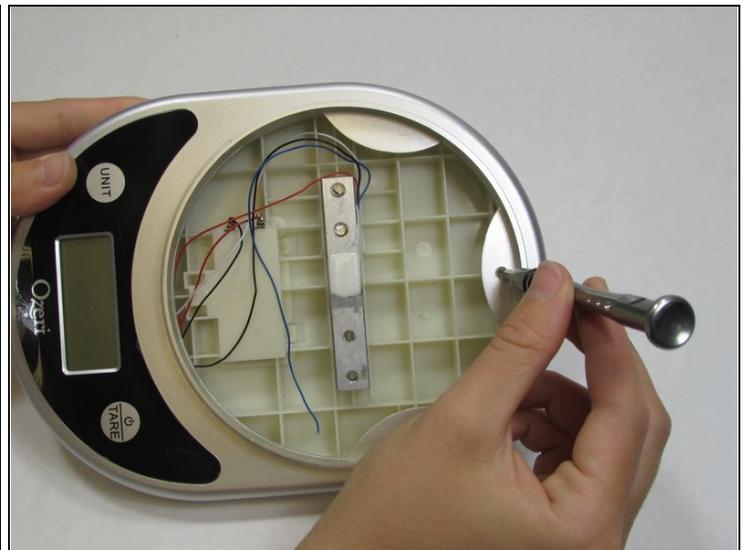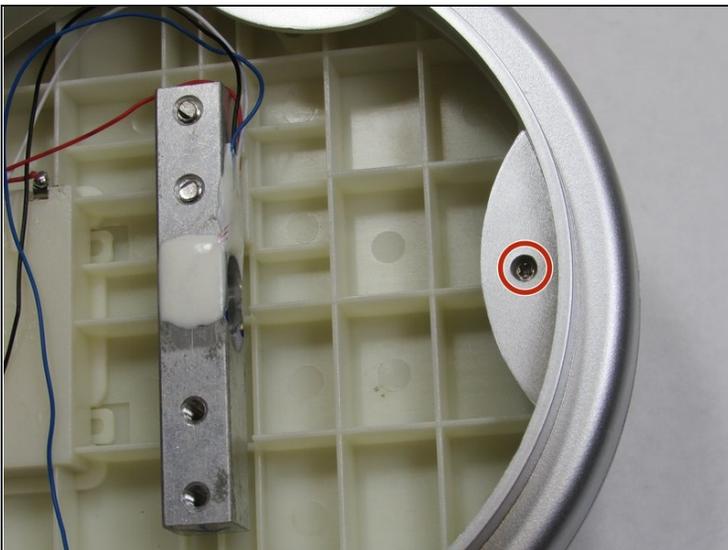

- Using the 2.0 Flathead screwdriver, remove the 9.44 mm Phillips head screw on the end opposite of the LCD screen.

## Step 6



- Turn the device over so the back panel is facing up.

## Step 7




- Using the plastic opening tool, pry off each of the two rubber stubs on the right side and the two stubs on the left side of bottom of the device.

## Step 8





- Using the 2.0 Flathead screwdriver, remove of the four 9.46 mm Phillips head screws under the removed stubs.

## Step 9

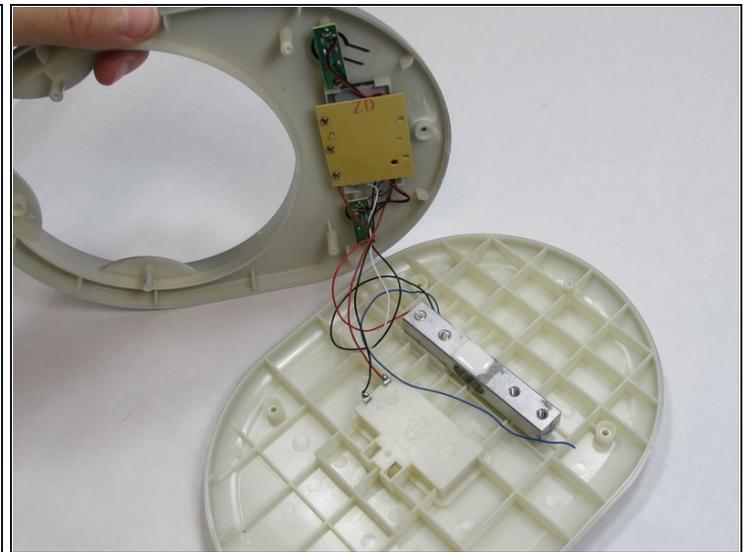



- Pry apart the two panels to separate them from each other.
- Flip the device over so the LCD is facing up. Flip the front panel over on its side.  
⚠ Be careful when separating the panels to avoid damaging the wires they are connected by.

## Step 10 — Button

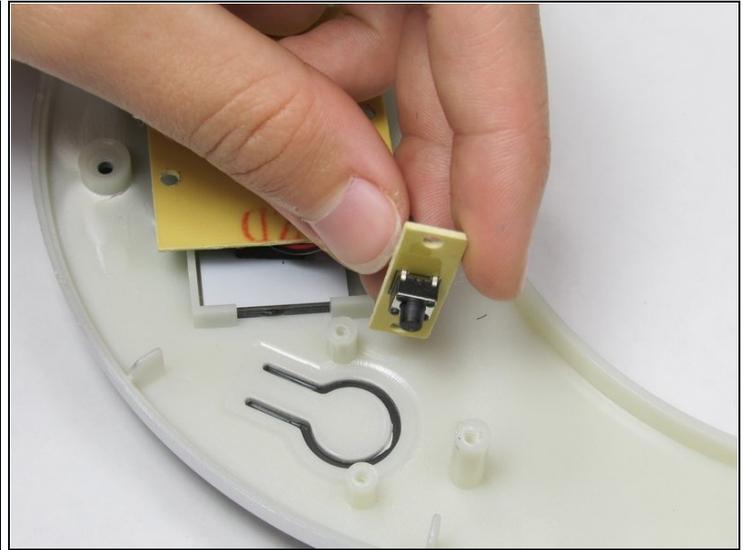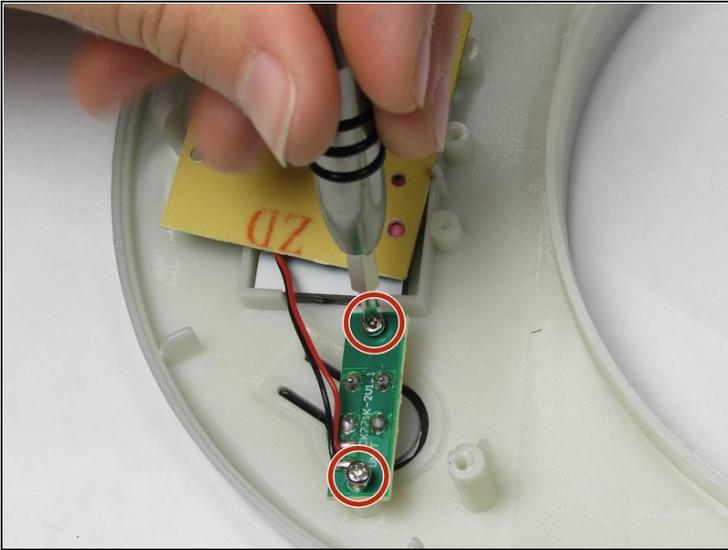


- Using the [2.0 Flathead](#) screwdriver, remove the two 7.34 mm screws on of the smaller motherboards.

## Step 11

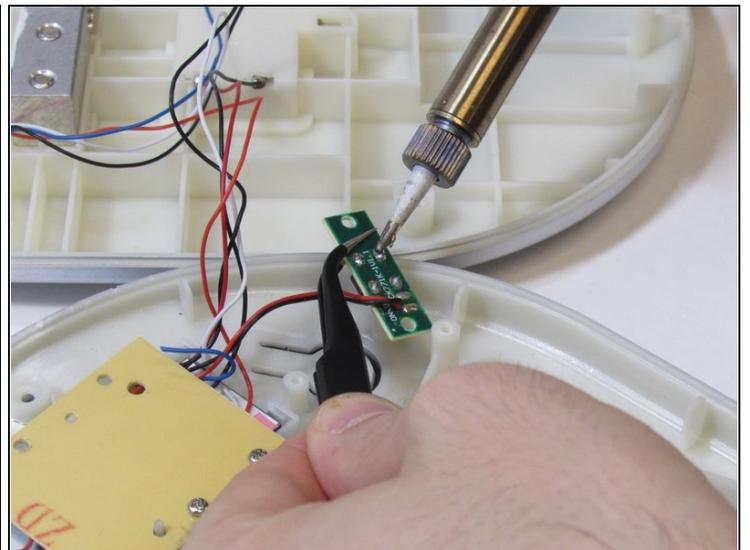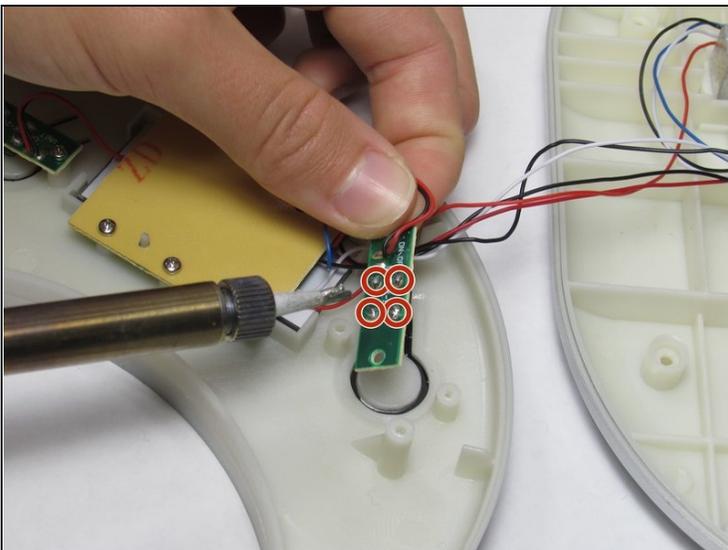

- Desolder the four posts in the center of the motherboard.  
**⚠ Use caution when handling the soldering since it can get very hot.**

## Step 12

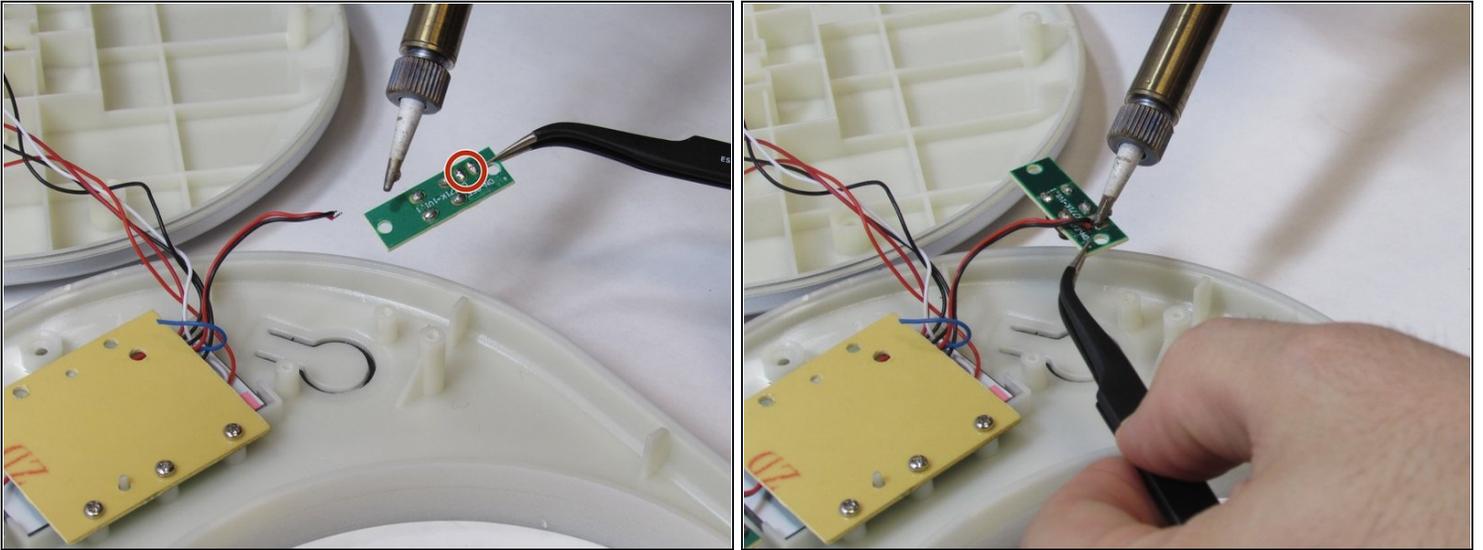

- Desolder the two clips in the center of the motherboard.  
**⚠ Use caution when handling the soldering iron since it can get very hot.**
- ⓘ Note: Repeat steps 13 and 14 to remove the other button from its motherboard.

---

To reassemble your device, follow these instructions in reverse order.