




Asus 1015E-DS03 Motherboard Replacement

This guide will help you to remove the motherboard from the laptop.

Written By: Joe Capriola

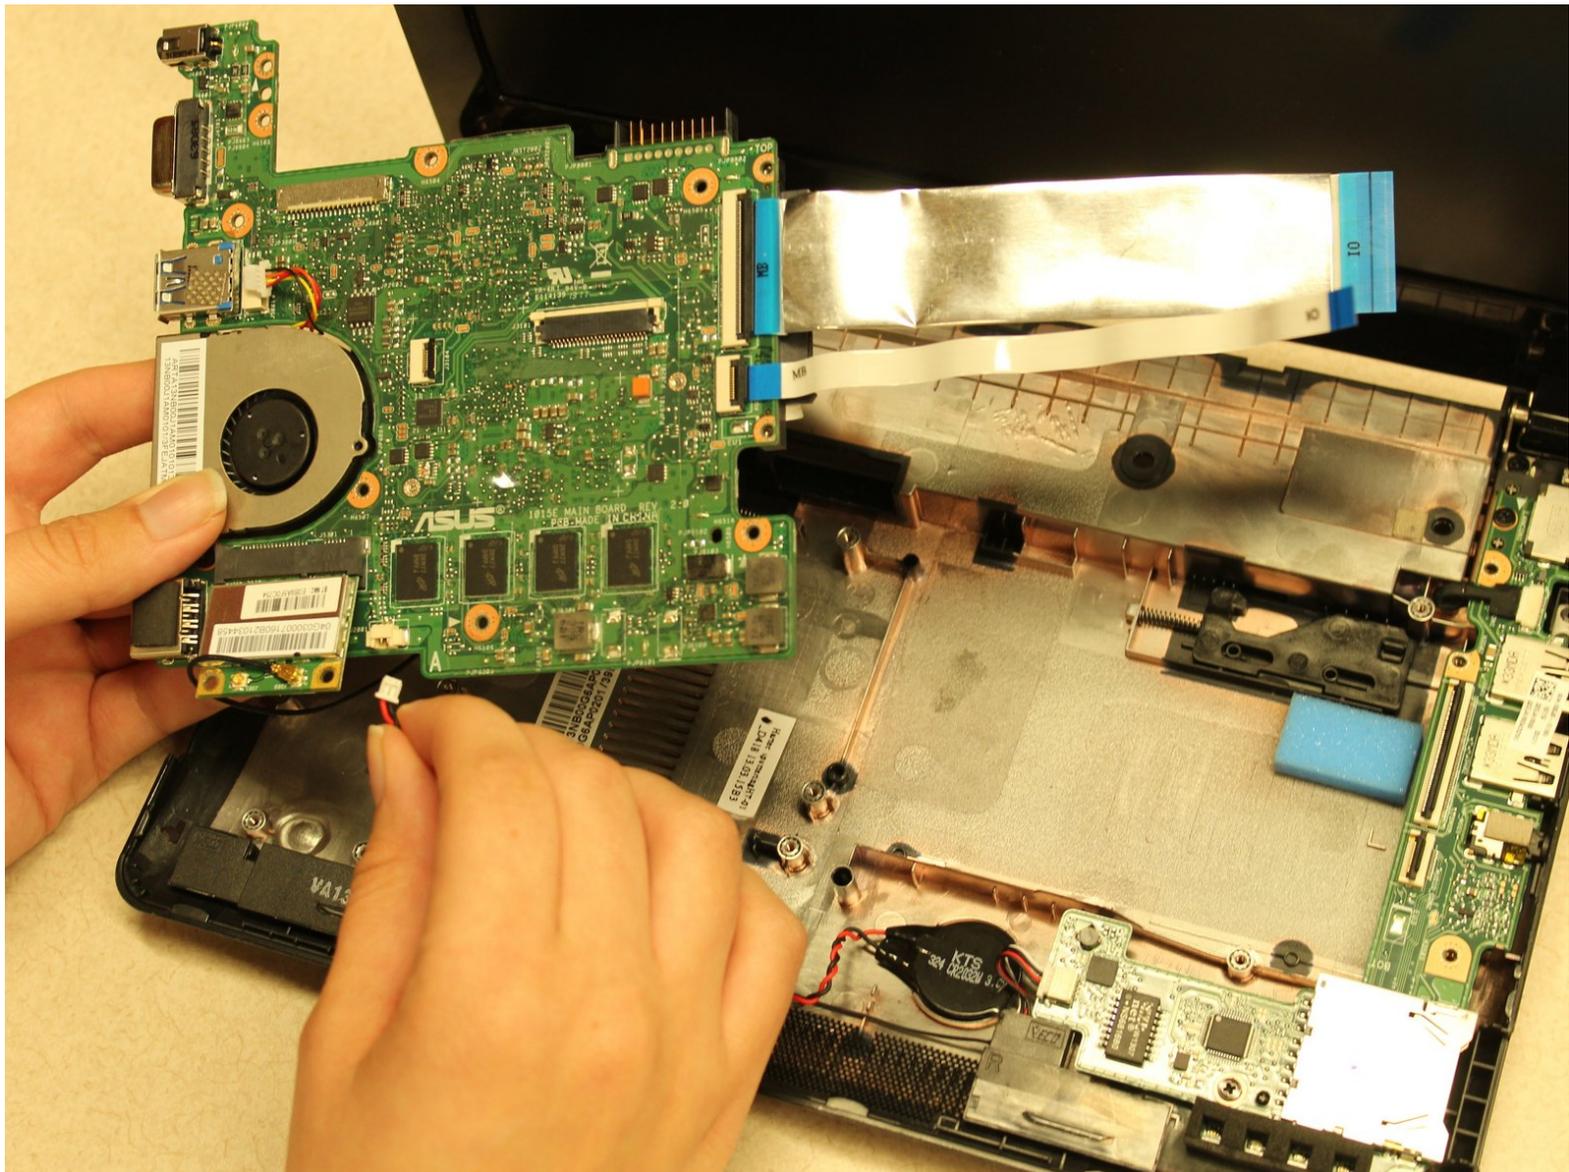


INTRODUCTION

This guide will demonstrate how to remove the motherboard. A spudger and screwdriver will be used.

TOOLS:


- [Fingers](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery

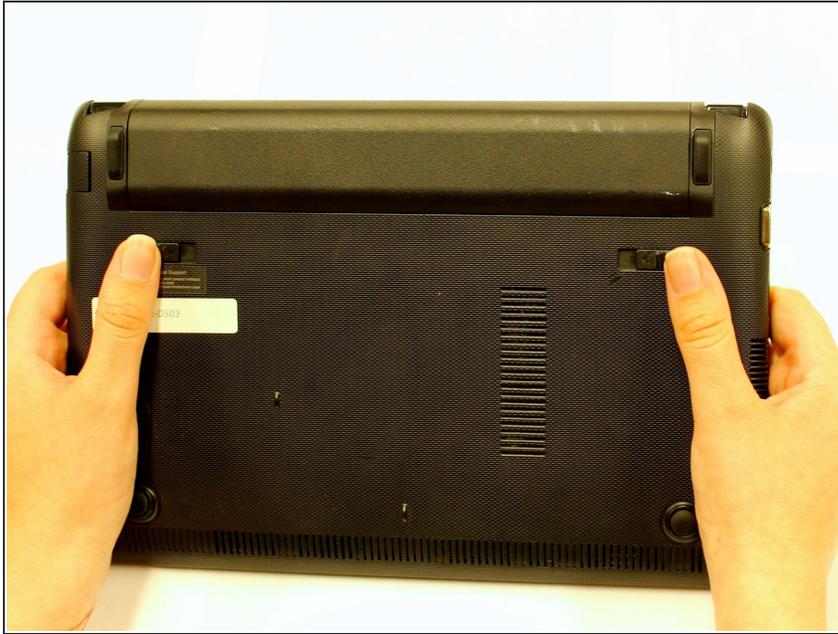

- Hold the laptop using both hands with the battery facing upwards.

Step 2

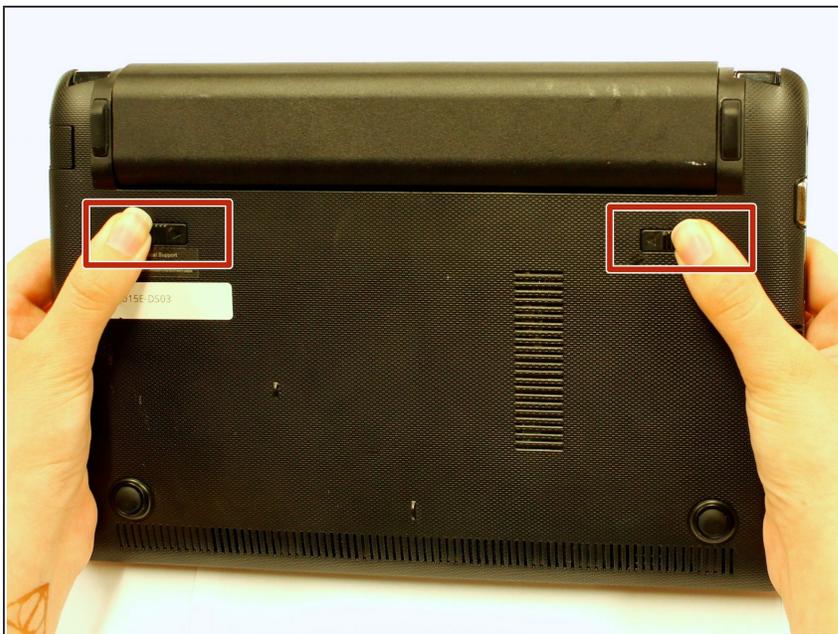

- Push the two tabs located below the battery in towards each other using your thumbs.

Step 3



- Push the battery upwards and out of the laptop as shown.

Step 4



- Continue to push the battery upwards until it is completely separated from the laptop as shown.



Step 5 — Keyboard



- Once the battery is removed, unscrew the highlighted 3mm screws (4) using a #0 Phillips head screwdriver.


⚠ Be very careful not to lose the screws, these four screws are very small.

Step 6

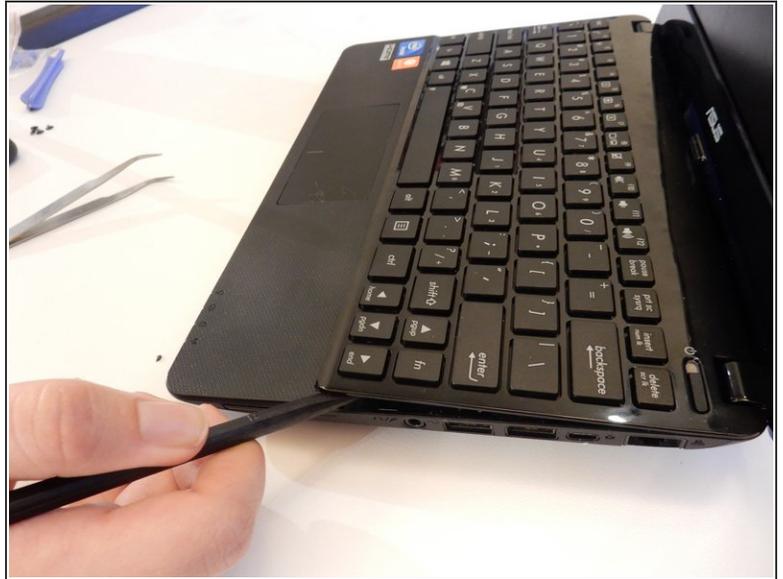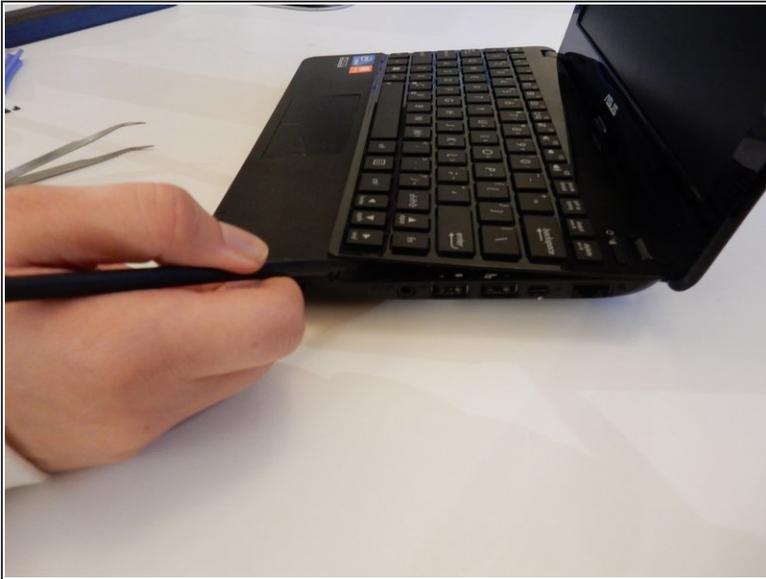

- After all four screws are removed, flip the laptop over with the keyboard facing up.
 - Use a spudger to pry up where the keyboard is attached to the laptop on all sides until it is detached from the laptop.
- i** It is normal to hear cracking noises when prying off the keyboard.
- !** After keyboard is detached from laptop, there is a ribbon cable still attached to the motherboard. See next step before completely removing keyboard.


Step 7

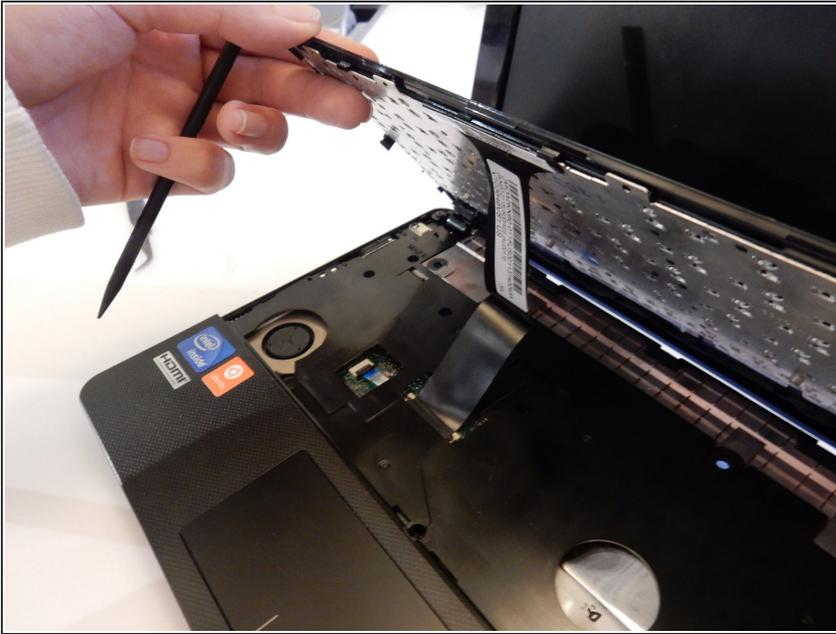

- After the keyboard is detached, the ribbon cable which connects the keyboard to the laptop's motherboard is exposed.


 Be careful not to tear or rip the ribbon cable.

Step 8

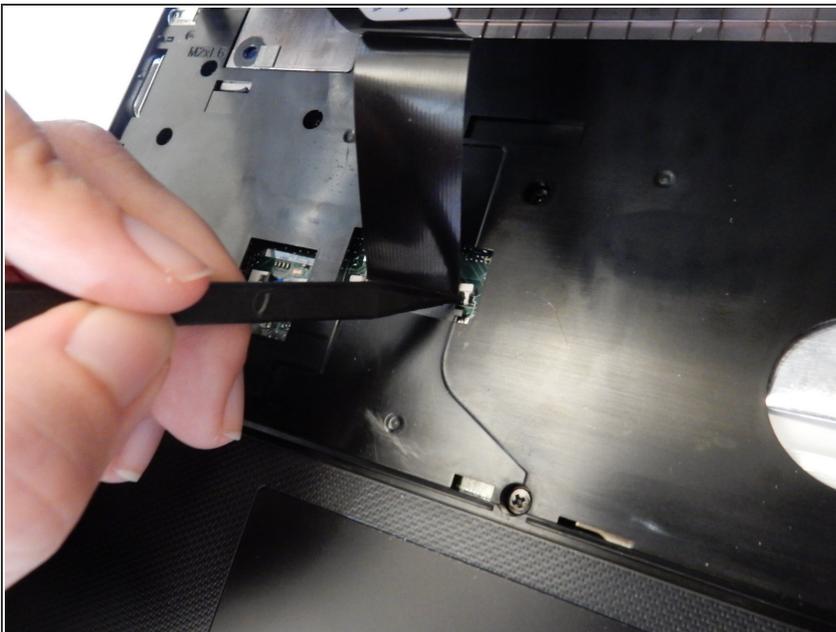


- Using the spudger push the white clips upwards that are holding the cable.

Step 9

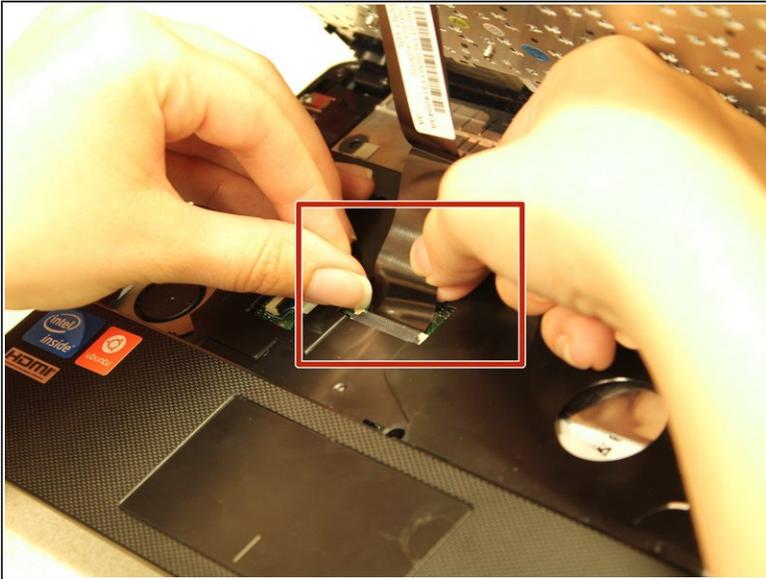

- Gently pull the strip out of the square slot.

Step 10 — Motherboard

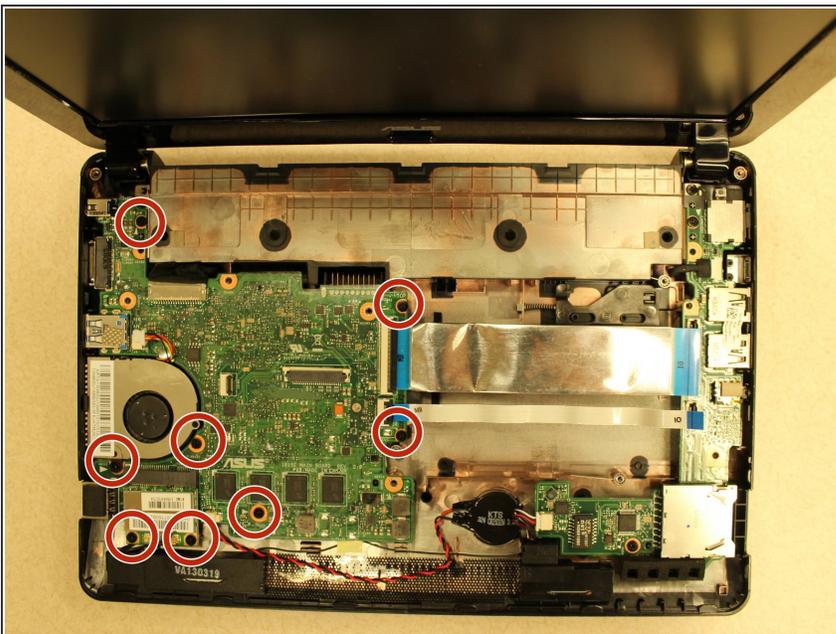

- Remove the 3mm screws (8) from the motherboard using a #0 Phillips head screwdriver.
- Carefully and slowly lift the motherboard out of the base of the laptop.
- ⓘ In the picture shown, the hard drive has already been removed, although, it is not necessary to remove the hard drive in order to remove the motherboard. Simply disconnect the two ZIF connectors from the hard drive that are labeled "IO" as shown in the picture and leave the hard drive in place.

Step 11



- Detach the 3 components (2 wires and 1 chip) prior to completely removing the motherboard.
- Gently pull on the wire until it comes loose.
- ⓘ The wire will offer resistance, but firmly, yet gently, pulling on the wire will release it from its dock.
- Gently pull the chip out of its dock.

Step 12



- Gently pull out the final cord.
- When the wires and chip have been successfully detached from the motherboard, your laptop (and the removed pieces) should resemble the picture.

To reassemble your device, follow these instructions in reverse order.