




Astro Mixamp USB Port Replacement

Use when the USB port needs to be removed....

Written By: Hope Burns

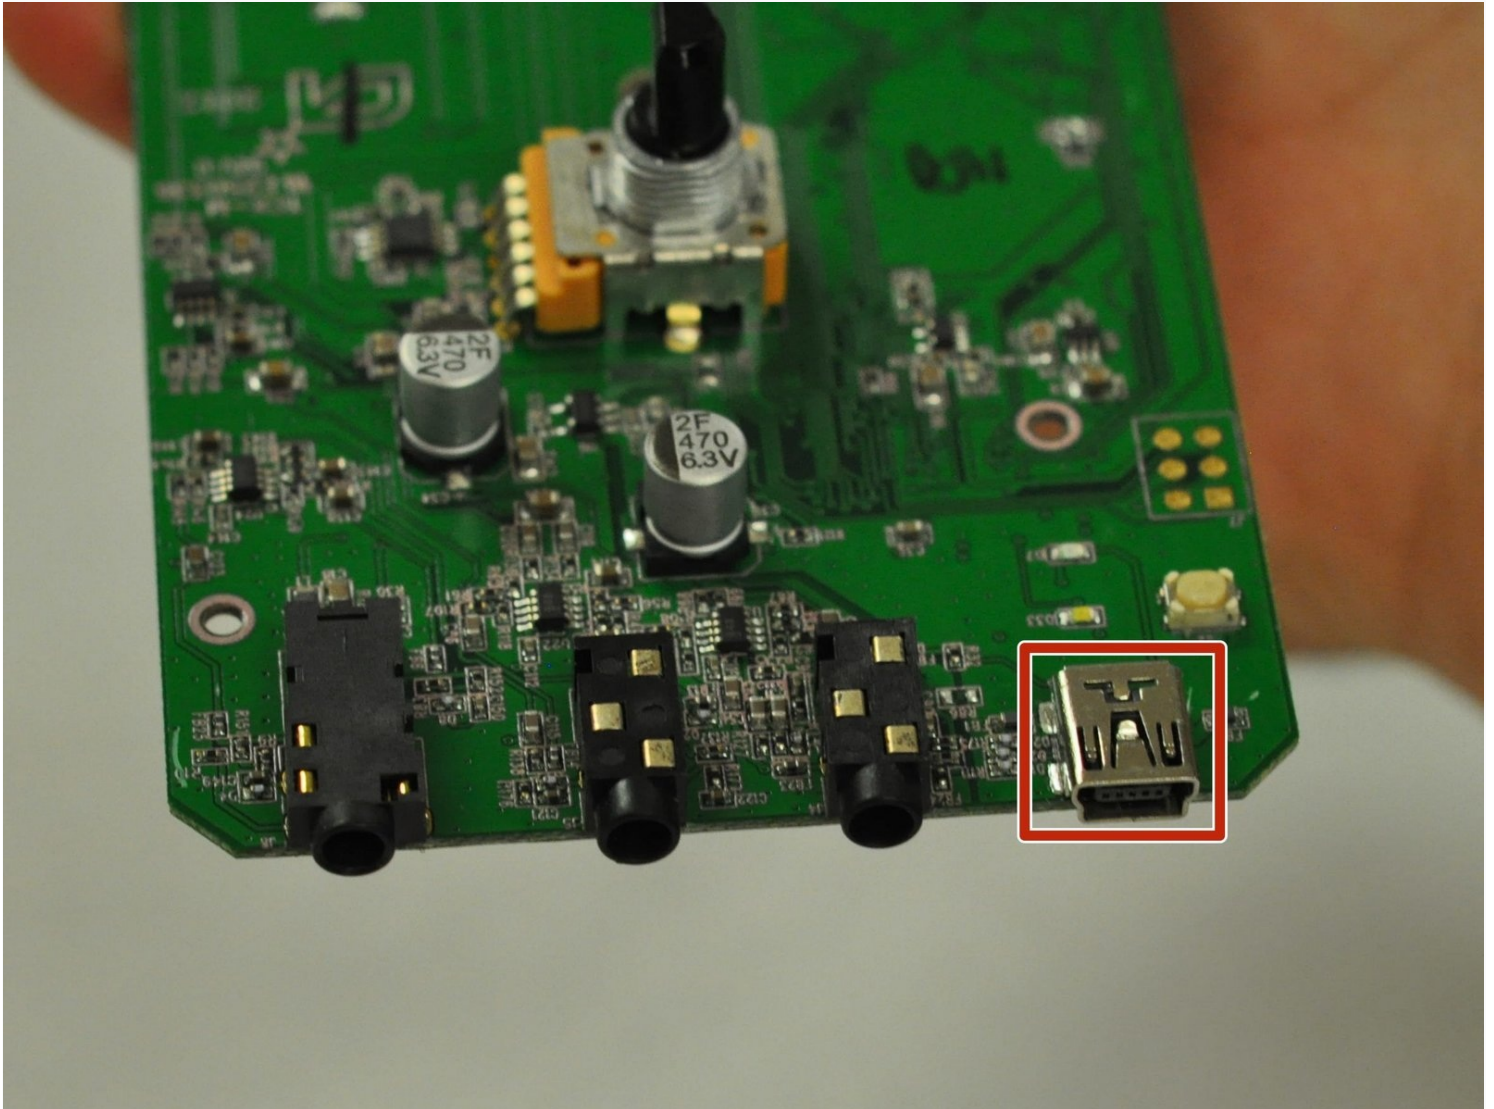

INTRODUCTION

Use when the USB port needs to be removed. (Soldering Required)

TOOLS:

[Tweezers](#) (1)
[iFixit Opening Tool](#) (1)
[Soldering Iron](#) (1)
[Spudger](#) (1)

Step 1 — Panel Dial




- Grip the dial tightly and pull straight off the device.
- Repeat for the second dial

Step 2



- Using [tweezers](#), remove the spacer nuts and washers from each dial post.

Step 3 — Outer Casing

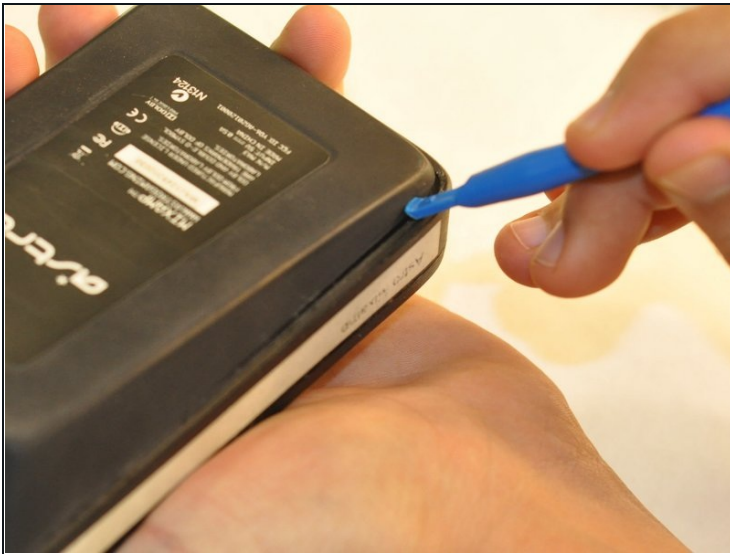

- ① Before opening your device, ensure the device is not on or connected to the charging cable.
- Insert a plastic opening tool into the seam between the rubber foot and plastic casing.
- Pull the rubber foot free of the plastic casing.

Step 4




- Use a screwdriver to remove the screw from the rear casing.

Step 5



- Gently lift the rear casing from the device.


Step 6 — Motherboard

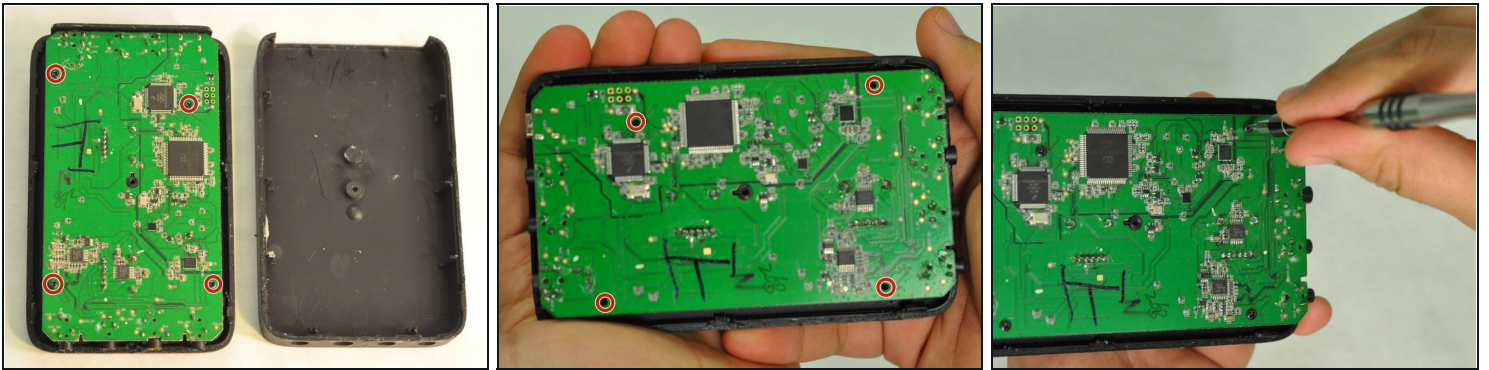

- Remove the four screws that hold the motherboard in place.




⚠ Only touch the edges of the motherboard. Touching the surface can damage the motherboard.

Step 7

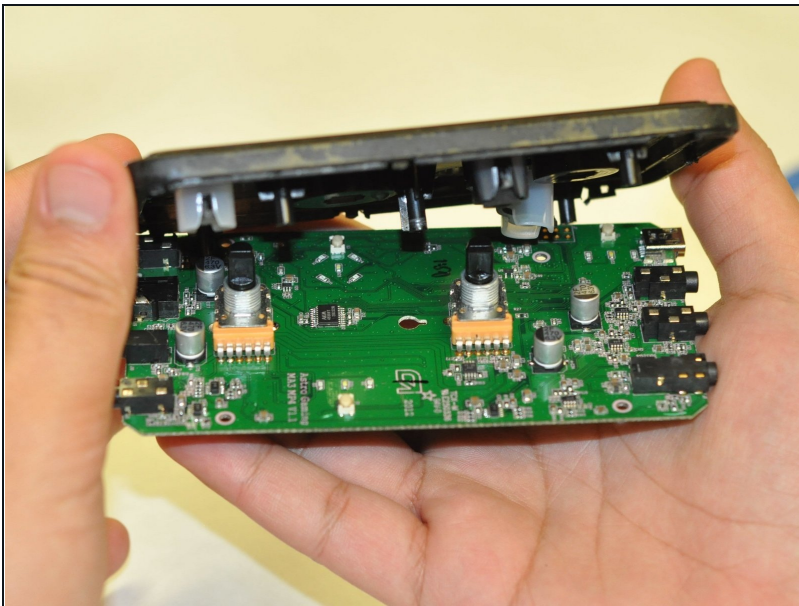

- Gently pull the motherboard from the front cover.

Step 8 — USB Port

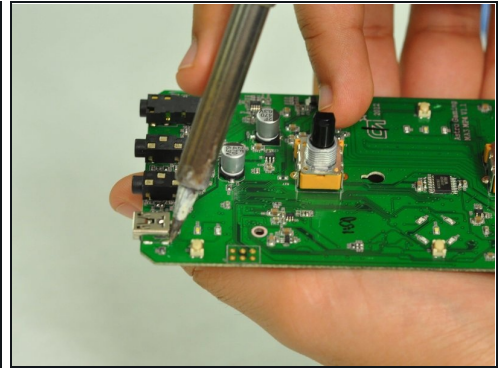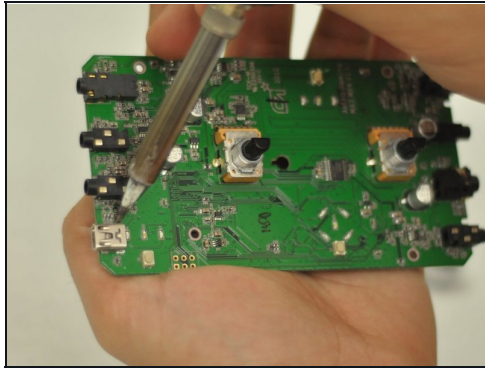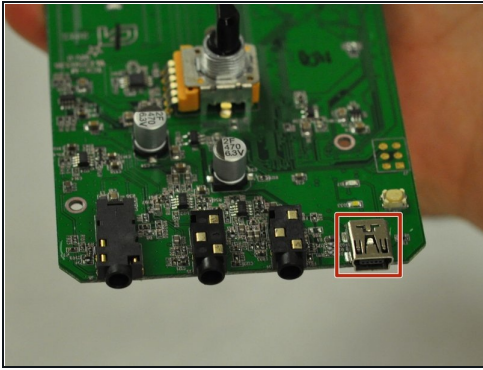

- Press the tip of a hot soldering iron to the USB connection to melt the solder.
 - Use a nylon spudger to lift the USB from the solder.
 - Repeat for each of the four USB connections.
- ① For more help on soldering, refer to this guide: [How To Solder and Desolder Connections](#)
-

To reassemble your device, follow these instructions in reverse order.