



# HP Pavilion 17-f127ds Keyboard Replacement

You might need to replace your keyboard. This guide will show you how to replace it.

Written By: Alissa Tu



---

## INTRODUCTION

The HP Pavilion 17-f127ds, is a standard “QWERTY” keyboard, if there is a malfunction or if you need to use a different language keyboard, you will need to remove the keyboard manually, this guide will assist you in the matter.

---

### TOOLS:


- [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



- ⓘ Before starting, please turn off your laptop.
- Slide the battery lock latch, the latch on the left, inwards.
- Slide the battery release latch on the right inwards to release the battery.
- ⓘ The latch may require significant force to slide.
- Lift the battery up and remove it from computer.

## Step 2 — Keyboard

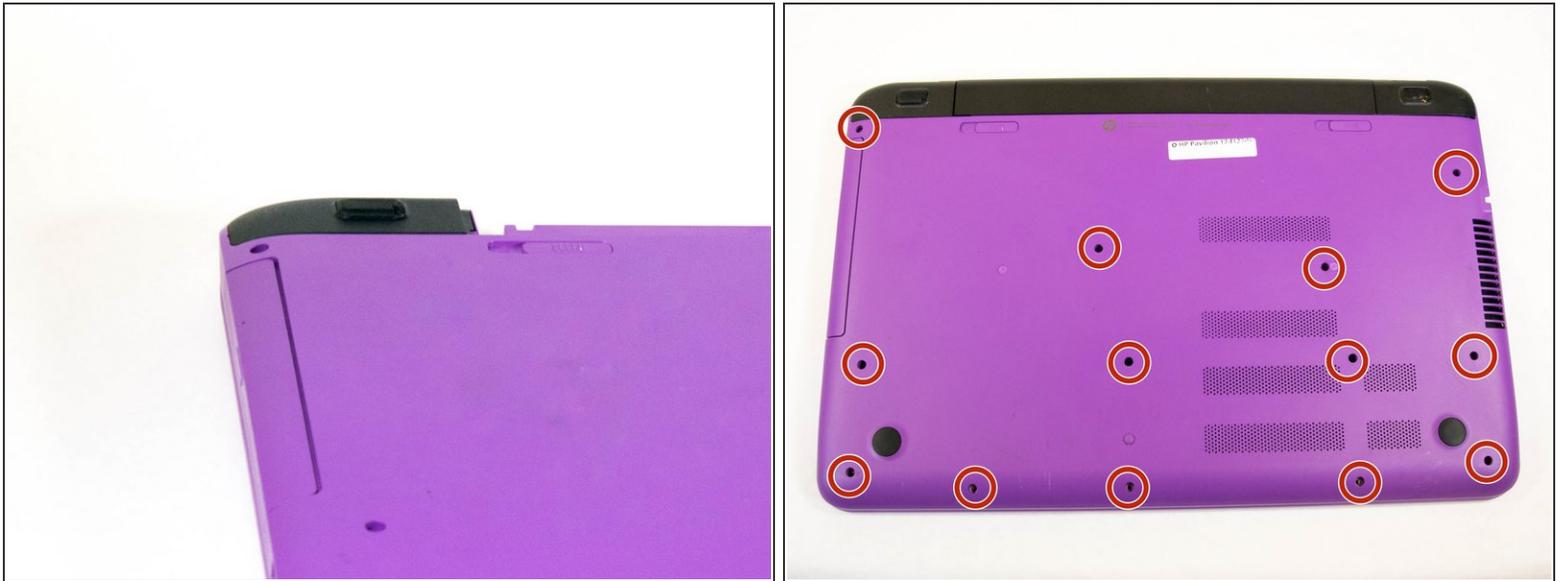

- Flip your laptop over on a firm surface.
- Using a Phillips #1 screwdriver, remove the thirteen screws on the back of your laptop.
- Flip your laptop back over.

## Step 3



- Using the opening tools, separate the keyboard from the laptop by prying it from the base along the sides of the laptop.
  - With your fingers, disconnect the keyboard connector and the connector cable from the motherboard.
- ⚠ Be careful not to lift the keyboard too high because it might rip off the connectors.
- Carefully remove the keyboard.

To reassemble your device, follow these instructions in reverse order.