




Corsair Void Pro RGB Lights Replacement

Replacing the RGB lights in the earcups is a...

Written By: Gianna Nobili

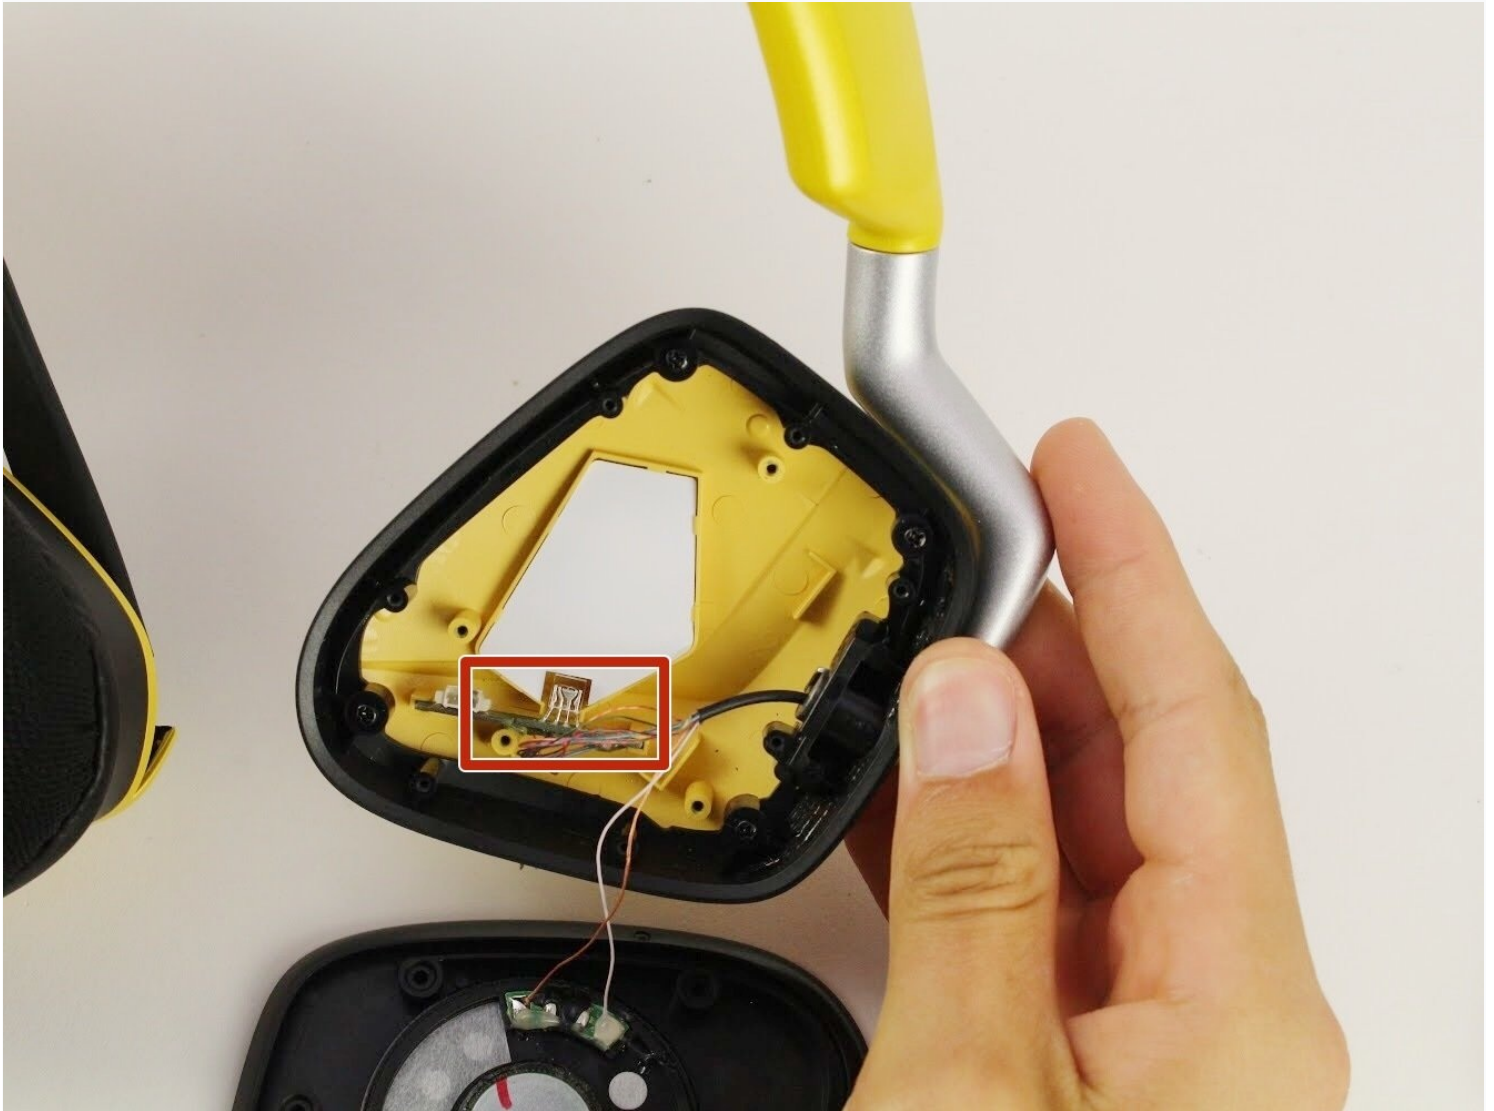

INTRODUCTION

Replacing the RGB lights in the earcups is a technical process that includes disassembly and soldering. This guide walks you through each of the steps to replace the lights in the righthand earcup. For this guide, you will need a soldering kit and a screw driver kit.

TOOLS:

[iFixit Opening Tool](#) (1)

[T5 Torx Screwdriver](#) (1)

[Soldering Iron Hakko FX650-02/P](#) (1)

[Phillips #0 Screwdriver](#) (1)

[Desoldering Pump](#) (1)

[Lead-Free Solder](#) (1)

Step 1 — Earcup




- Carefully remove earmuff from headphones by getting a grip under the earmuff cushion and peeling up over the lip that keeps it in place.

Step 2



- Using the Phillips #0 screwdriver, unscrew the seven 6.4 mm screws holding the black speaker cover in place.
- ⓘ If you are disassembling the lefthand earmuff, there will be eight 6.4 mm screws to remove.

Step 3

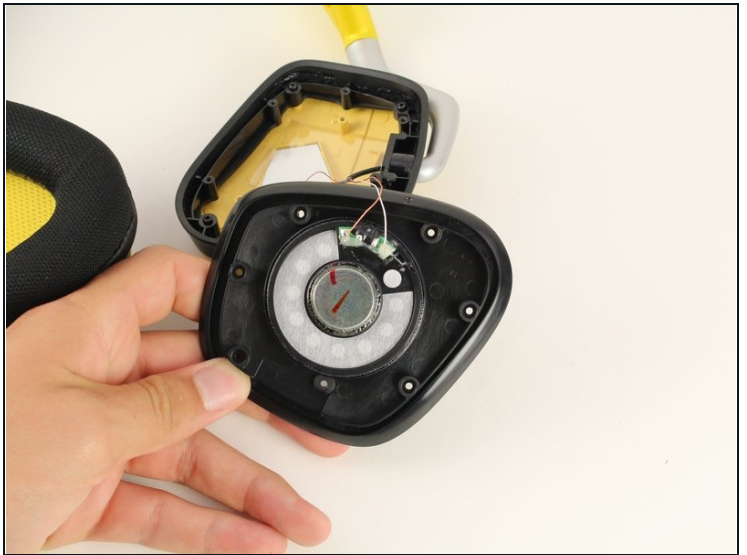


- Remove and set aside the black panel, taking care to keep the wires attached.
- ⓘ The panel should lift up without much force. If the panel does not budge, carefully use the iFixit plastic opening tool to dislodge the piece.

Step 4 — Battery



- Using the Phillips #0 screwdriver, remove the three 6.4 mm screws on the black plastic panel with the grid of holes.

Step 5

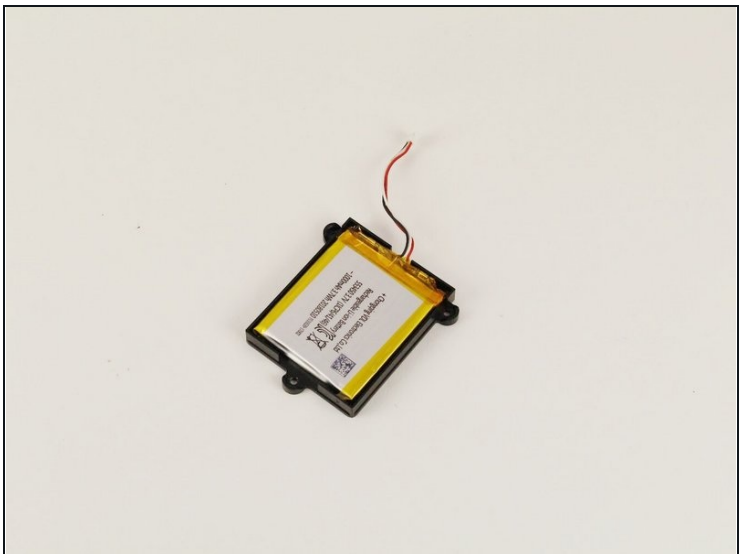

- Carefully unplug the wire that connects the battery pack to the headphones.

ⓘ This should not take too much force.

Step 6




- Remove the clear plastic covering and set aside.

Step 7 — Lights




- There is a small circuit board near the bottom of the muff.
- Using a Phillips #0 screwdriver, unscrew the single screw holding the circuit board in place.

Step 8

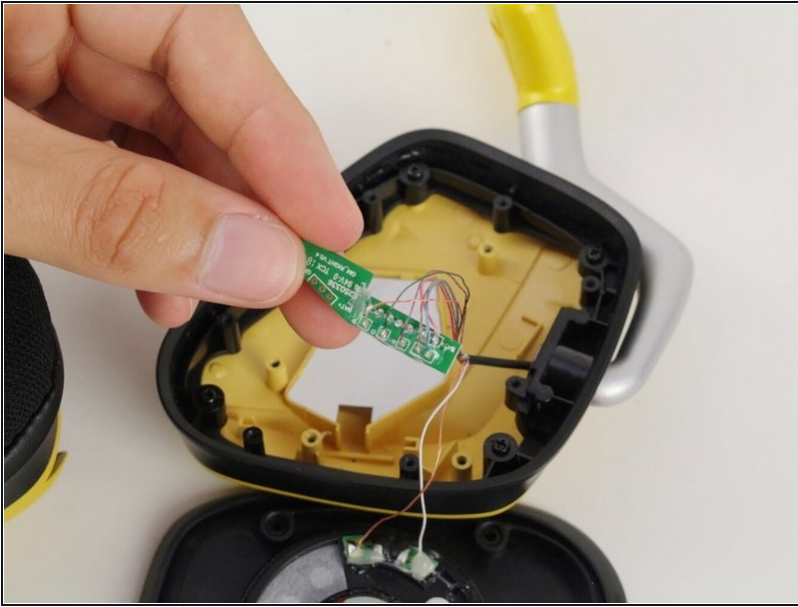

- Remove the circuit board from its plastic slot.
- ⓘ If this is the first time the lights have been removed from the headphones, you may need to wiggle the circuit board out of place or use plastic [tweezers](#) to loosen it from the manufacturer's adhesive.

Step 9

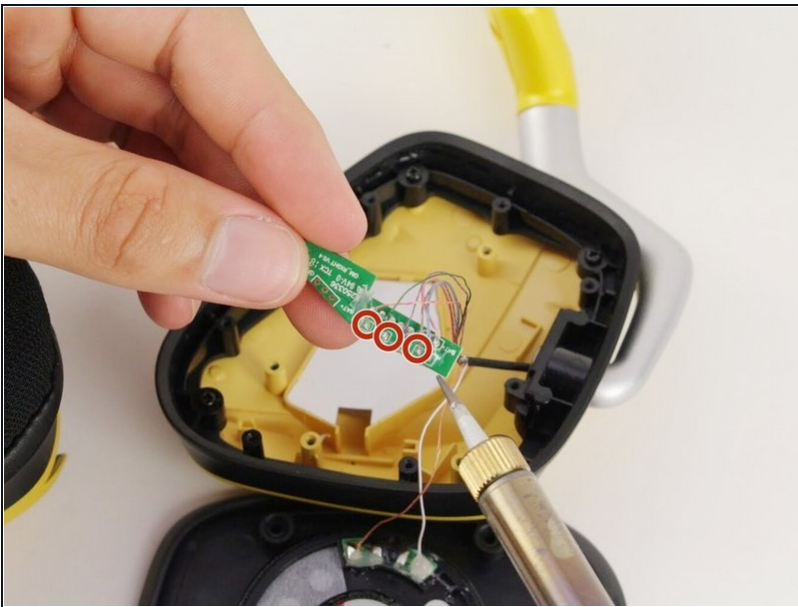

- Desolder the three points where the wires connect to the circuit board. For detailed instructions on soldering, see this helpful [guide](#).
- ☑ Take note of where each of the wires goes to simplify the resoldering process.
- Follow these steps again to replace the light on the other earcup.

To reassemble your device, follow these instructions in reverse order.