


Dell Vostro 3561 Hard Drive Replacement

Written By: Johnathan Hammond



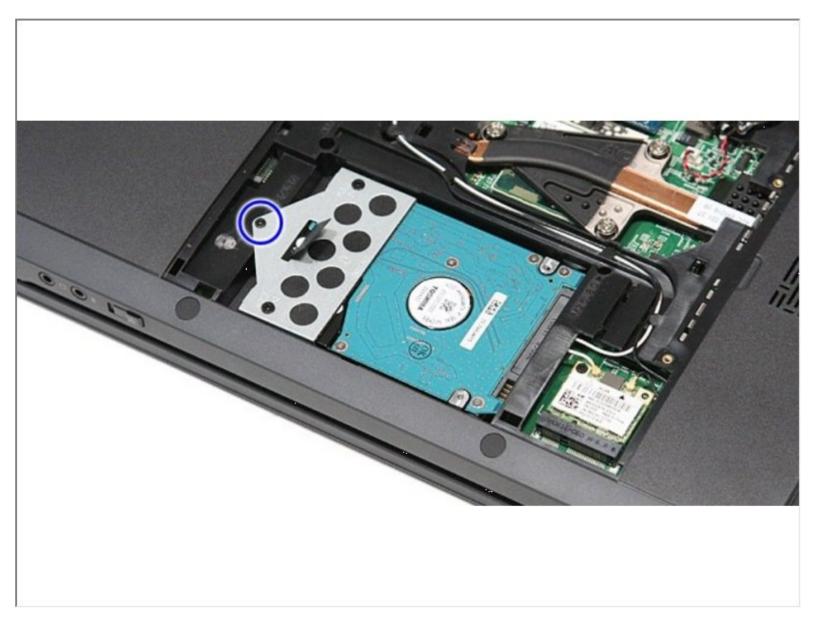


Phillips #0 Screwdriver (1)

Step 1 — **Sliding the Battery Release Latch**




- Flip the computer over.
 - Slide the battery release latch to the unlock position.

Step 2 — Slide the Battery Release Latch

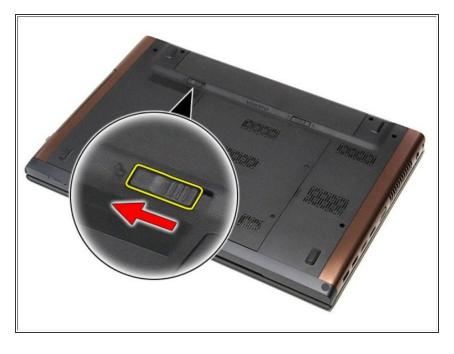

 Slide the other battery release latch to the unlock position.

Step 3 — Removing the Battery

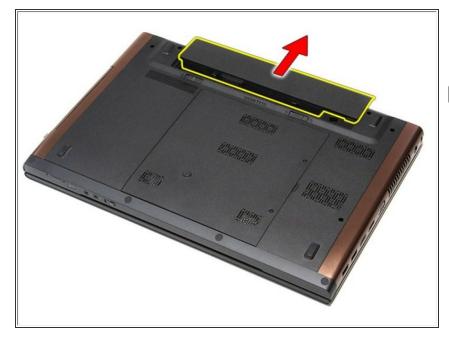


- Slide the battery and remove it from the computer.
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 4 — Remove the Screws



 Remove the screws that secure the base cover to the computer.

Step 5 — Removing the Base Cover

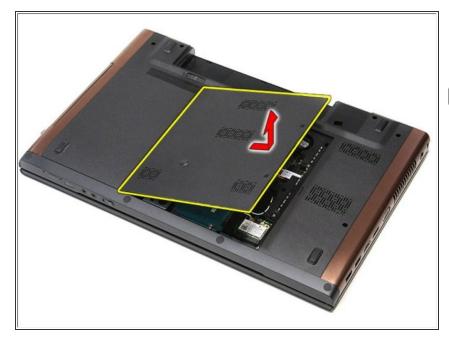


- Lift up the base cover and remove it from the computer.
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 6 — Hard Drive




 Remove the screw that secures the hard-drive assembly to the computer.

Step 7

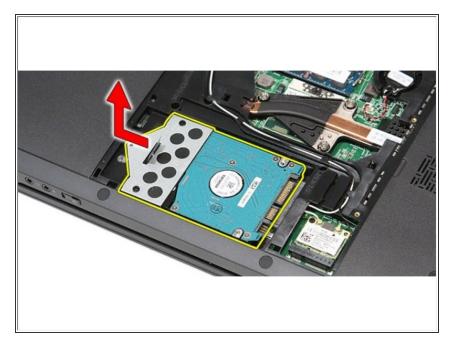


 Slide the hard-drive assembly towards the center of the computer and lift it up and away from the computer.

Step 8

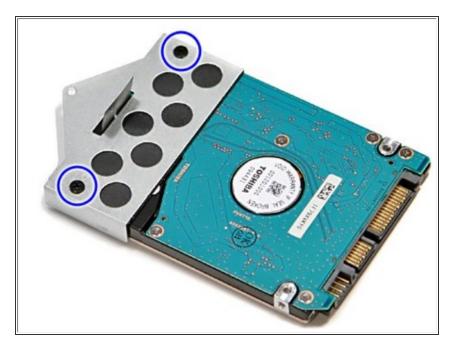

 Remove the screws that secure the hard-drive bracket to the hard drive.

Step 9

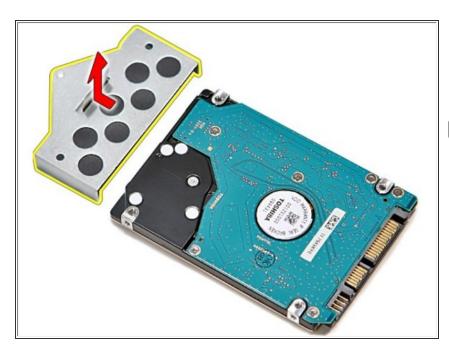

- Lift up the hard-drive bracket and remove it from the hard-drive assembly
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

To reassemble your device, follow these instructions in reverse order.