




# HP Deskjet 930c Disassembly to clean Waste Ink Reservoir

This guide shows you how to remove and clean the waste ink reservoir.

Written By: Bernard DU MORTIER

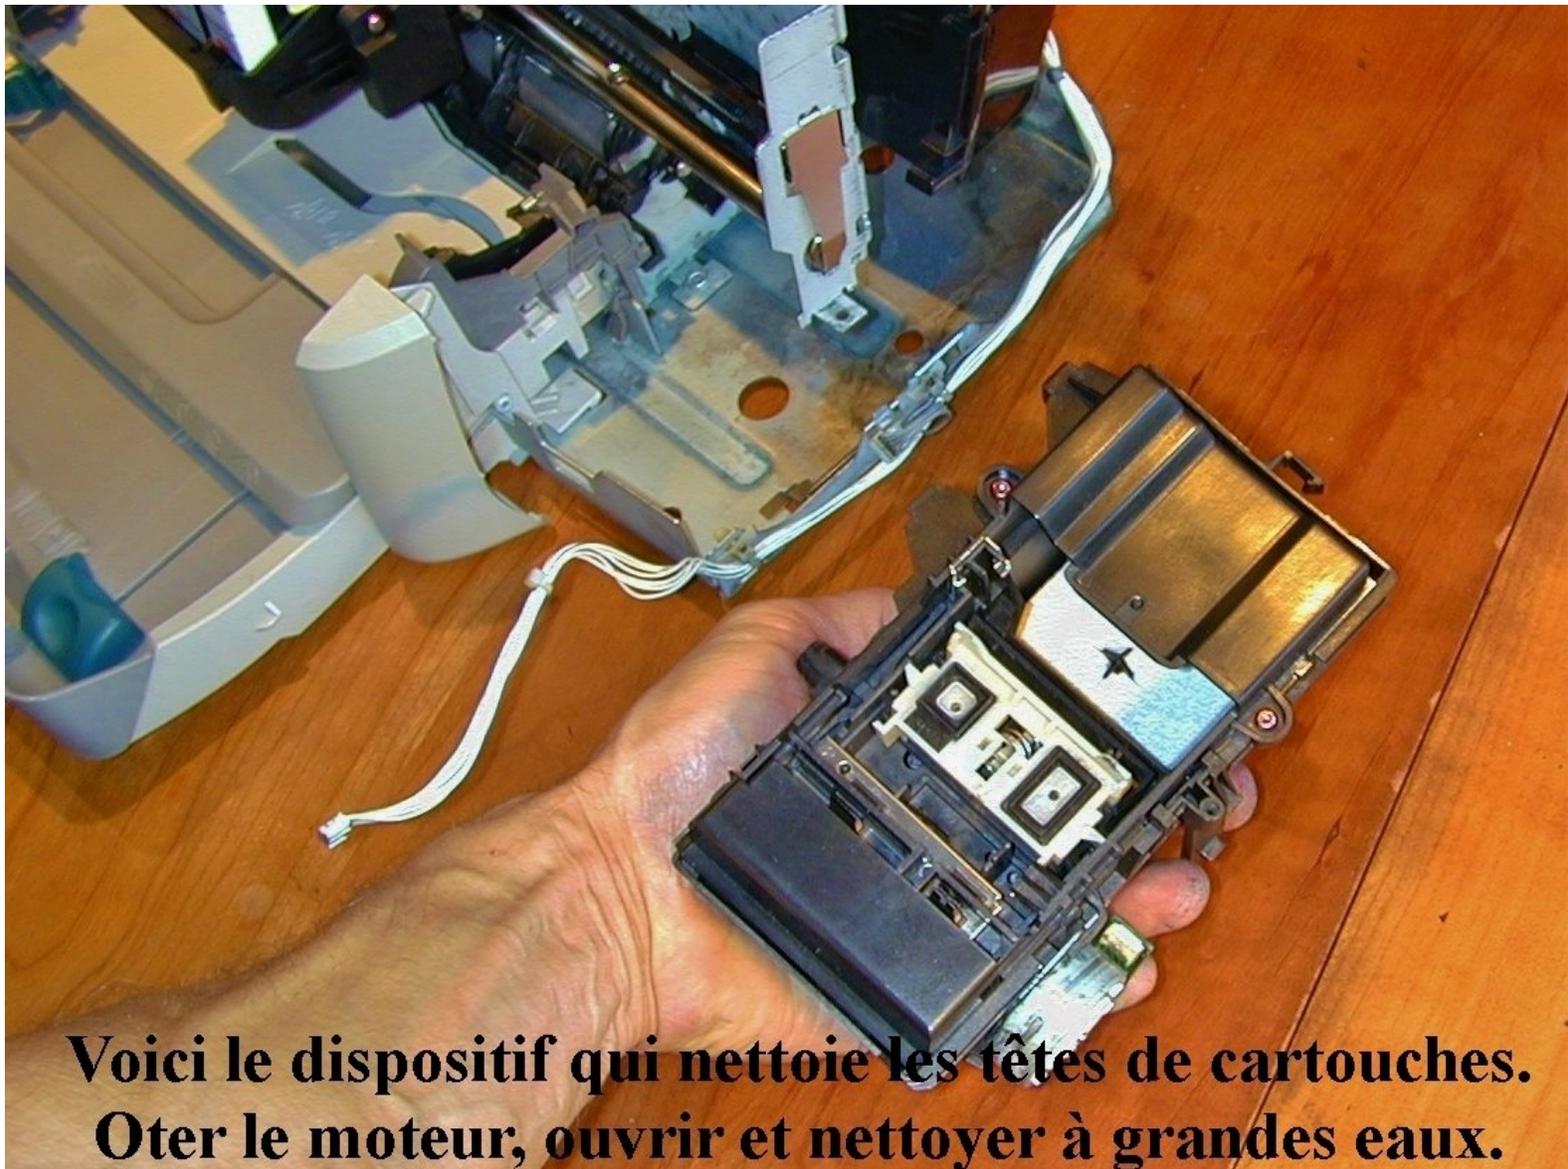

**Voici le dispositif qui nettoie les têtes de cartouches.  
Oter le moteur, ouvrir et nettoyer à grandes eaux.**

---

## INTRODUCTION

How to dismantle HP Deskjet 930c printer to reach and clean waste ink reservoir and pad.

---

### TOOLS:

- [T8 Torx Security Bit Screwdriver](#) (1)
  - [Flathead Screwdriver](#) (1)
-

## Step 1 — HP Deskjet 930c Disassembly to clean Waste Ink Reservoir



- Carefully pry off the button board cover with a flat-head screwdriver.
- Unplug and remove the button board.
- Remove two screws that hold the printer's top piece in place with a TR8 Torx Security screwdriver.

## Step 2



- Remove the printer's lid.
- Push in the tab shown to remove the top plastic assembly of the printer.
- ⓘ You don't have to remove the cartridge cover to do this. Though removing the cover makes it easier, it is not a required step.

### Step 3



- Remove the paper jam door from the printer by turning the dial from the locked position to the unlocked position.

### Step 4





- Push and lift the tabs shown with a flat-head screwdriver.

## Step 5



- Remove the top casing from the printer.
- Unclip and pry off the side cover with a TR8 Torx Security Screwdriver.
- Pry off the plastic casing with force; the TR8 Torx Security Screwdriver can help here.

## Step 6

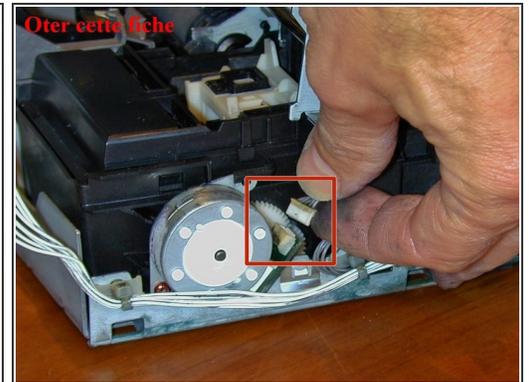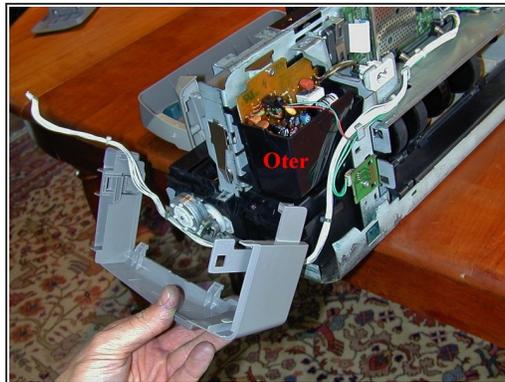


- Remove the plastic piece covering the motor that controls the waste ink assembly.
- Disconnect the motor connection.

## Step 7




- With the motor unplugged, move the ink cartridge carrier to the middle of the printer.
- ⓘ You can scroll the gear assembly with your finger if the carriage gets stuck.
- Remove four screws from the back panel.

## Step 8

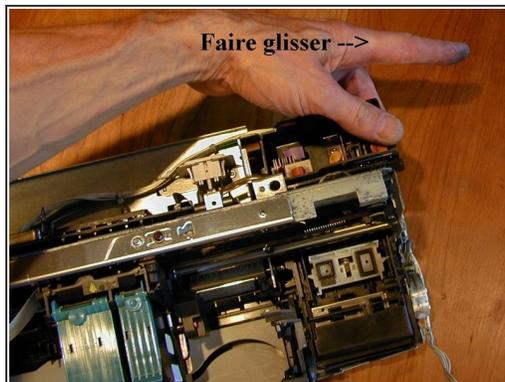

- Press the clip marked in red.
- Slide it to the right.
- Lift and remove this side.

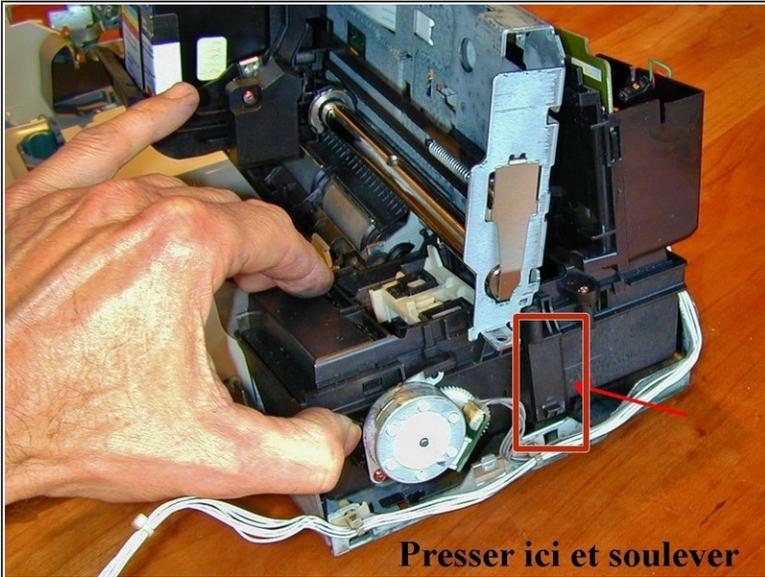**Step 9**

- Press where marked with the arrow and lift the waste ink reservoir.
- Remove the motor and clean with high-pressured water.

To reassemble your device, follow these instructions in reverse order.