



Ooma Telo Rev A00 Teardown

Teardown of Ooma Telo Rev A00

Written By: Tony Chidester





TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Find the edge



- The Ooma Telo's case is held together using small plastic clips around the top edge of the device.

Step 2 — Release the clips





- Use a tool to slip between the seam and release the clips holding the top case on.

Step 3 — Continue releasing clips




- There are several clips fastening the top case on. Work your way around. Take your time. Once 3 sides are free, you can wiggle the top clips loose and remove the top case.

Step 4 — Presto

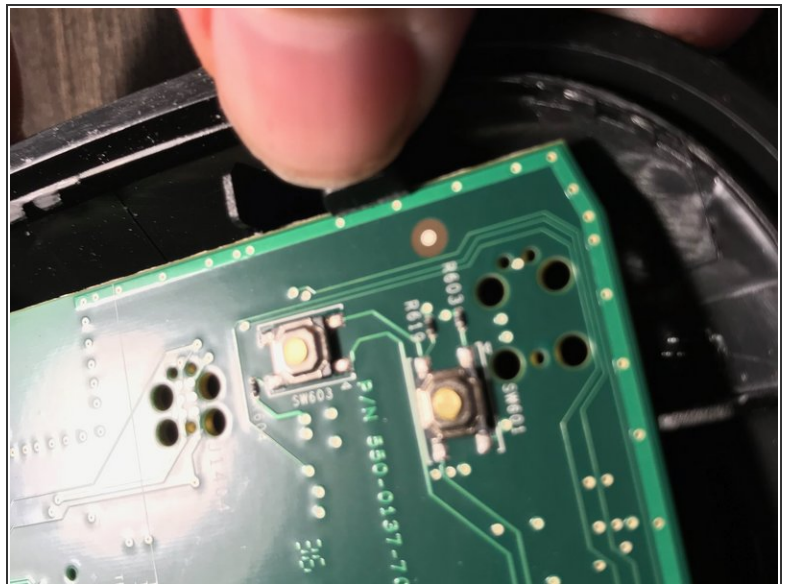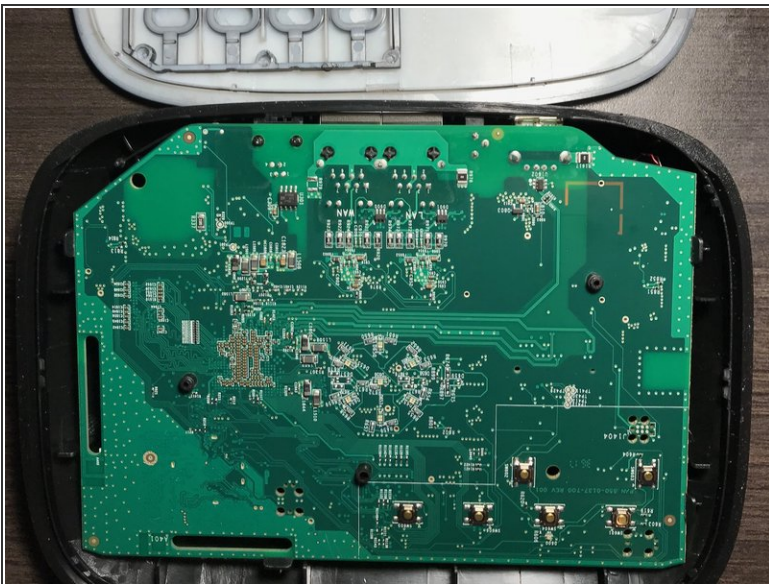


- Remove the lid. Inside there are three more clips holding the PCB in place.

Step 5 — PCB is free

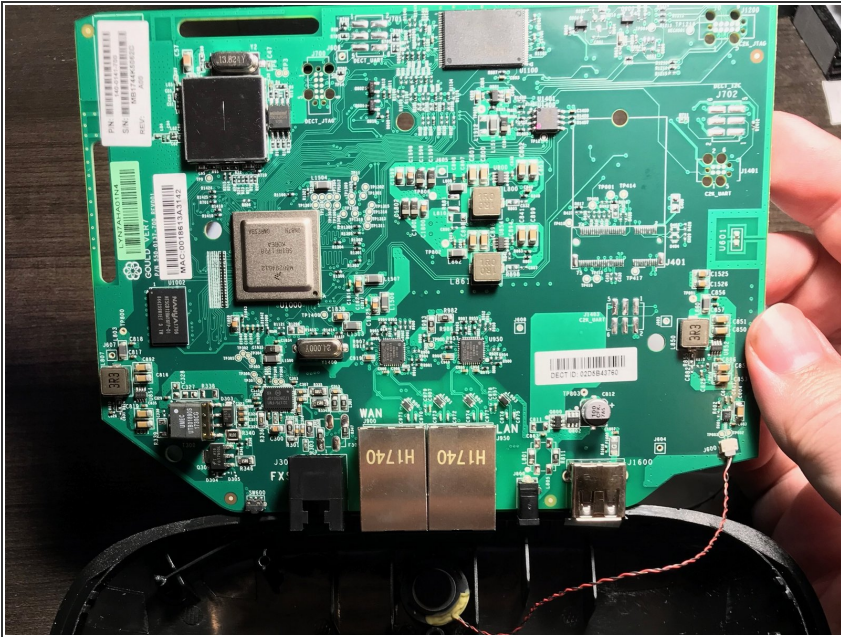


- The mainboard is now free besides a small connection to the speaker.

Step 6

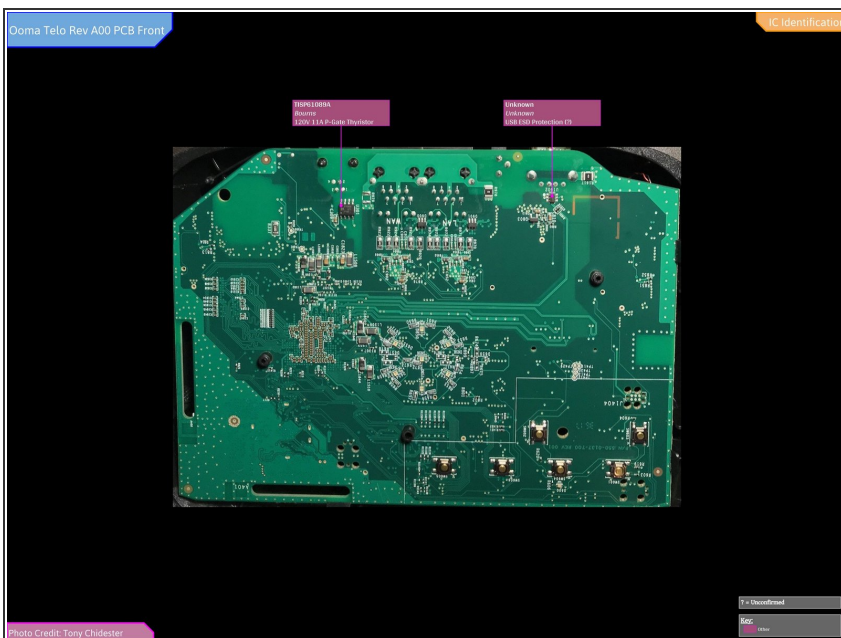

- Full Front IC Identification:
- You may need to enlarge it to view the text.

Step 7

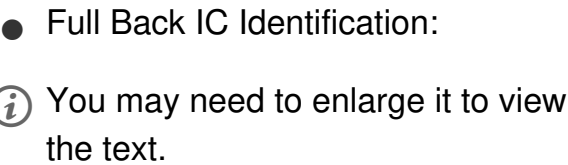

Step 8

