



# Garmin Dezl 760LMT Screen Replacement

This guide will show you how to properly and...

Written By: Ryan Williams



# INTRODUCTION

This guide will show you how to properly and safely remove the Garmin Dezl 760LMT's screen from the motherboard and its casing.

## TOOLS:

Anti-Static Wrist Strap (1)

T6 Torx Screwdriver (1)

Metal Spudger (1)

T5 Torx Screwdriver (1)

## Step 1 — Back Panel



- Using a Torx T6 Screwdriver, remove the ten 7mm screws from the back panel.

## Step 2



- Using a metal spudger, pry the device apart.
- ☑ To recombine them, line up the two halves of the device and press them together.


## Step 3



- Turn the device over, laying it on its back with the screen facing upwards.
  - Lift the front panel away from the silver part of the back panel.
- ⚠ Make sure not to rip the ribbon cable that is connected to the screen and the motherboard.





## Step 4 — Screen Ribbon Cable

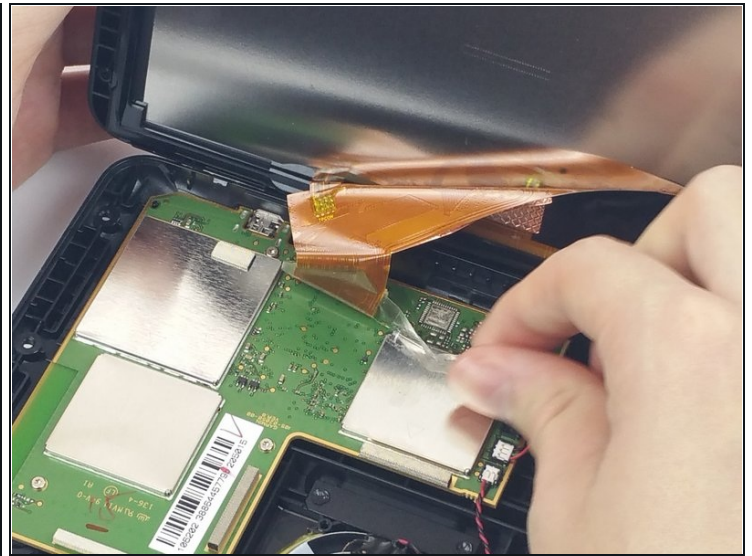

- Lift the screen opposite where the "GARMIN" logo is located. Remove the clear tape holding the ribbon cable to the motherboard.

## Step 5

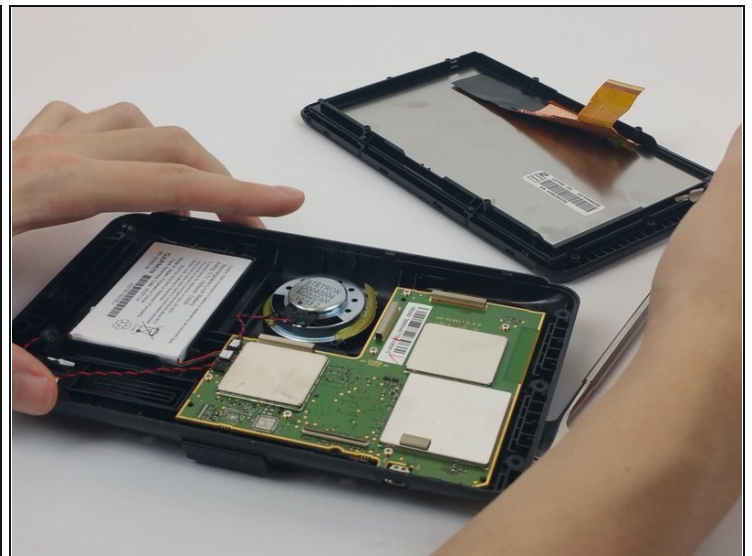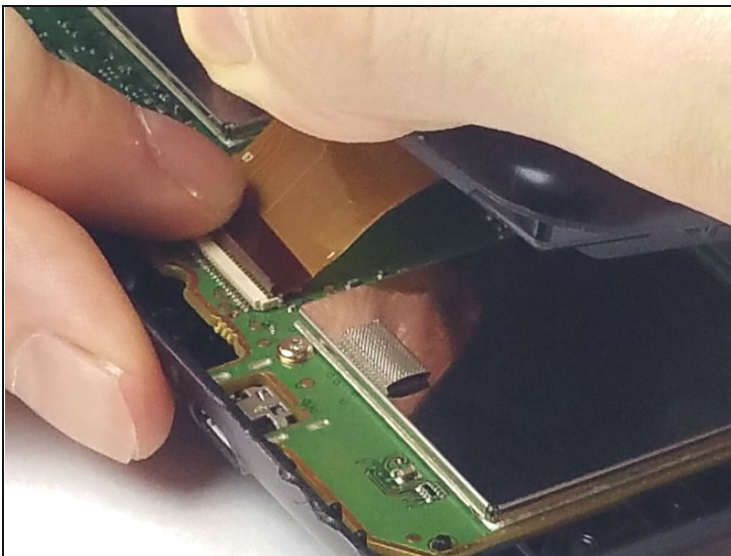

- Find and lift the small grey hinge at the end of the ribbon cable.


⚠ When handling the motherboard, make sure to wear an [anti-static wrist strap](#).

## Step 6 — Screen



- Using a Torx T5 screwdriver, unscrew the four 7mm screws from the back plate of the screen.

## Step 7

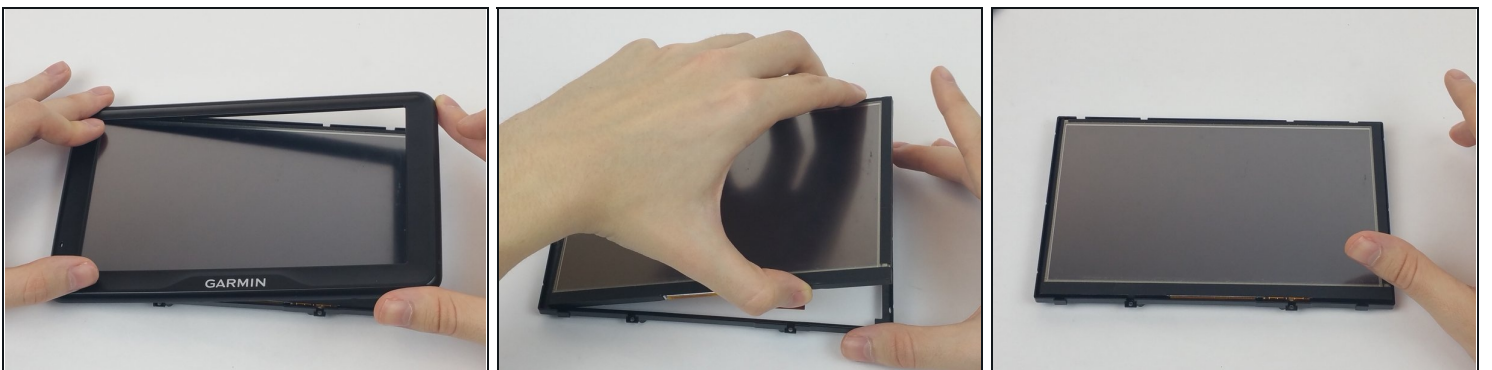

- Turn the screen over so that it is facing upwards.
- Remove the front plate of the screen.
- Lift the screen from its back casing.

To reassemble your device, follow these instructions in reverse order.