



# Insignia NS-BCDCAS1 Cassette Door Latch Replacement

Written By: diego geldres



---

 **TOOLS:**

2.5 mm Flathead Screwdriver (1)

---

### Step 1 — Outer Panels



- Turn the boombox around to see the back, and then flip it upside down.
- Insert a 2.5mm flathead driver into the two holes next to the battery compartment.
- Turn the driver counterclockwise several times to loosen and pull out the 17mm screw.

## Step 2



- Peel off the two black square foams in front of the battery compartment to reveal a screw under each one.

## Step 3



- Remove the two 8mm screws using a 2.5mm flathead driver.
- The front grey panel will loosen up once the final screw is removed.

## Step 4




- Turn the boombox on its back.
- Release the front panel by pushing down on the latches holding the panels together.
- There are four silver latches on the top side of the panel and one on the bottom.
- ⓘ Do not force the panel completely off, there are cables attached inside.

## Step 5




- Turn the boombox around to view the back and lift the handle up.
- Using the same driver with 2.5mm flathead, remove the two 14mm screws under the handle.
- Gently lift the black top but do not pull completely away.

## Step 6 — Cassette Door Latch

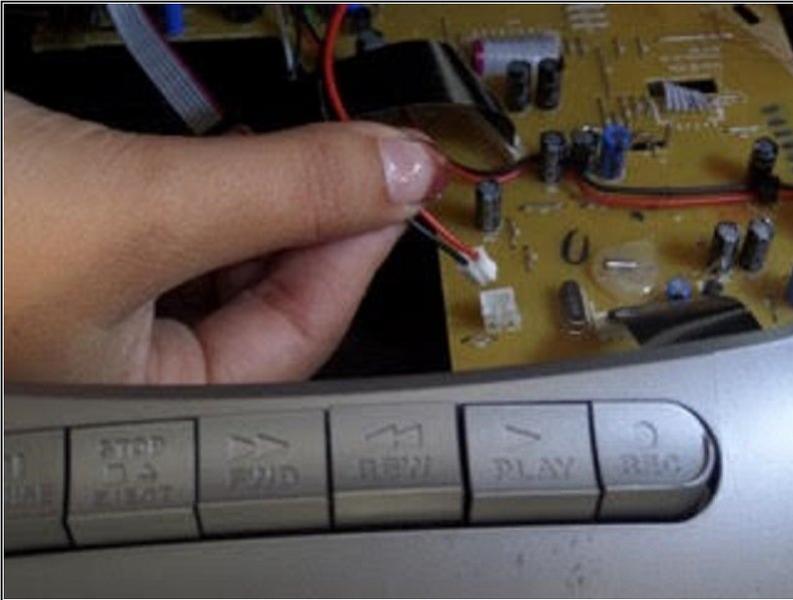

- Start by unplugging the red and black cable connected to the motherboard

## Step 7

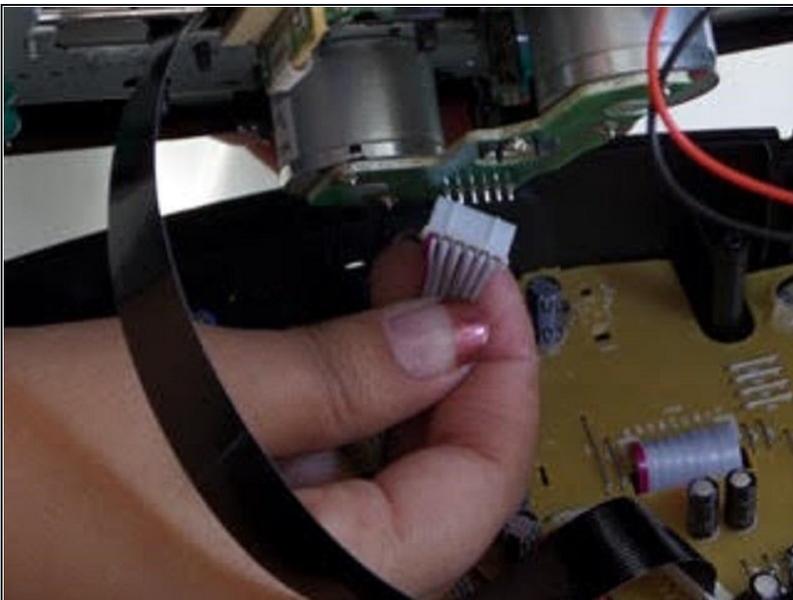


- Unplug the red and pink wires connecting the top of the device to the motherboard

## Step 8




- Disconnect the black shiny tape connecting the motherboard to the front of the device
- Also disconnect the pink and white wires connecting the cassette unit to the device.

## Step 9

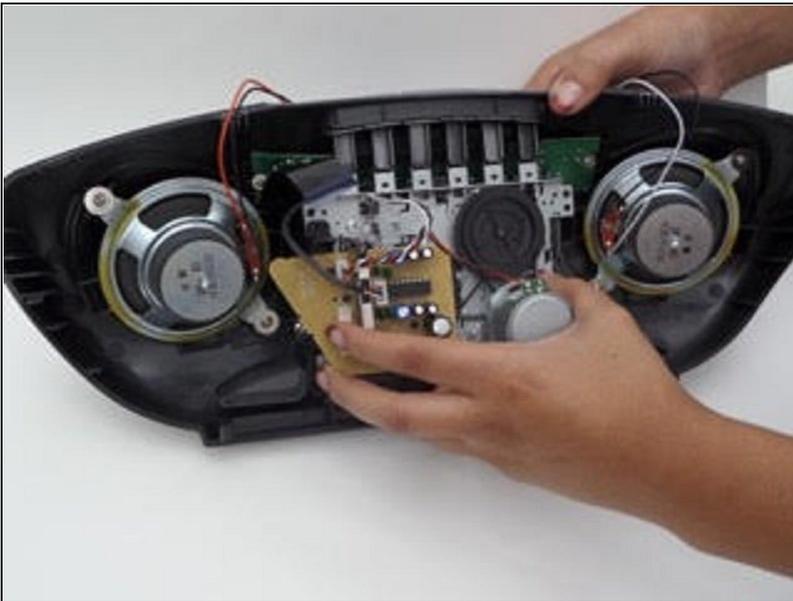


- After disconnecting all the wires, the front panel is now free and easy to work on.

## Step 10

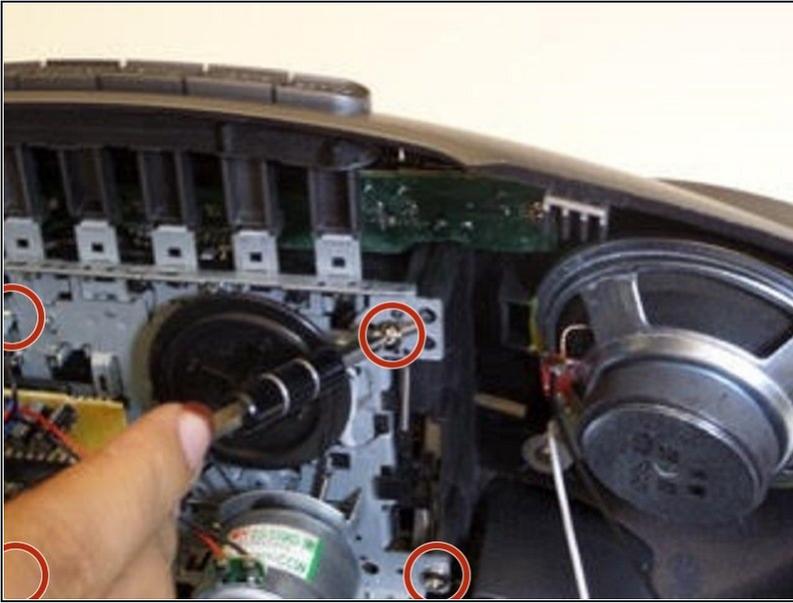


- To remove the cassette unit, use a [2.5mm flathead](#) on the 4 screws holding the unit together.

## Step 11

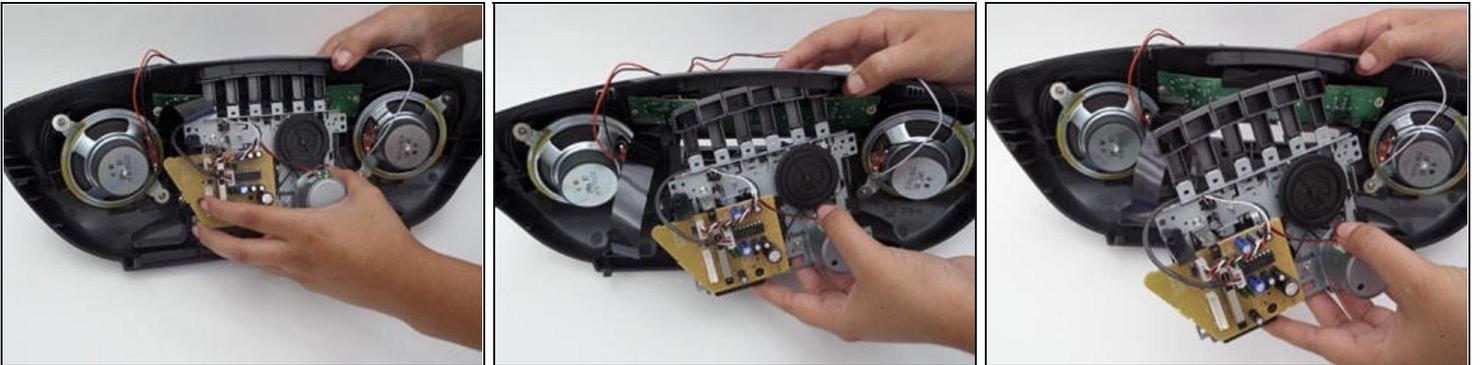

- While pressing the eject bottom, pull the cassette unit down and away from the front panel.

## Step 12

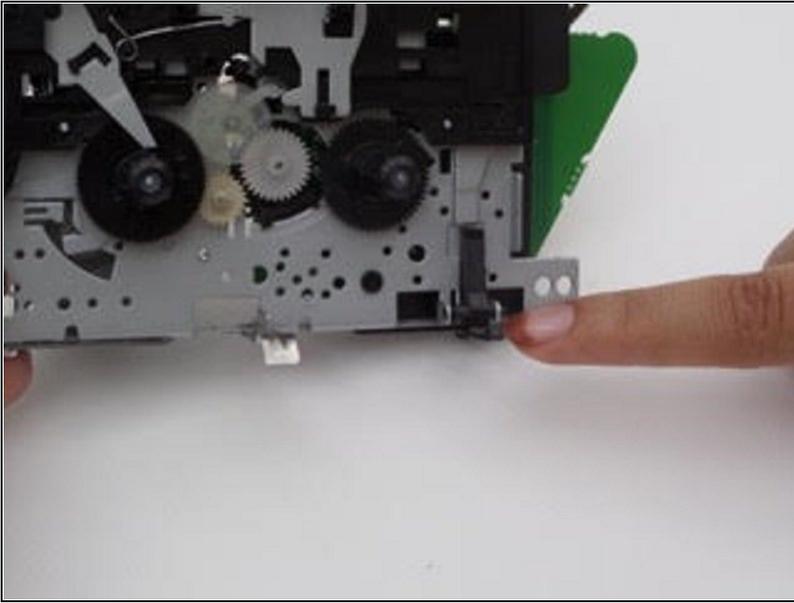

- The door latch is located on the bottom corner of the cassette unit.

---

To reassemble your device, follow these instructions in reverse order.