



Astro Pyle PTBL7C Speakers Replacement

A guide to replace the speakers of the Astro Pyle PTBL7C.

Written By: Abdulelah



INTRODUCTION

This will guide you through the process of replacing your Astro Pyle PTBL7C's speakers.



TOOLS:


- [Desoldering Braid](#) (1)
- [Desoldering Pump](#) (1)
- [Portable Soldering Iron](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Tweezers](#) (1)



PARTS:

- [Astro Pyle PTBL7C Speakers](#) (1)

Step 1 — Case Separation

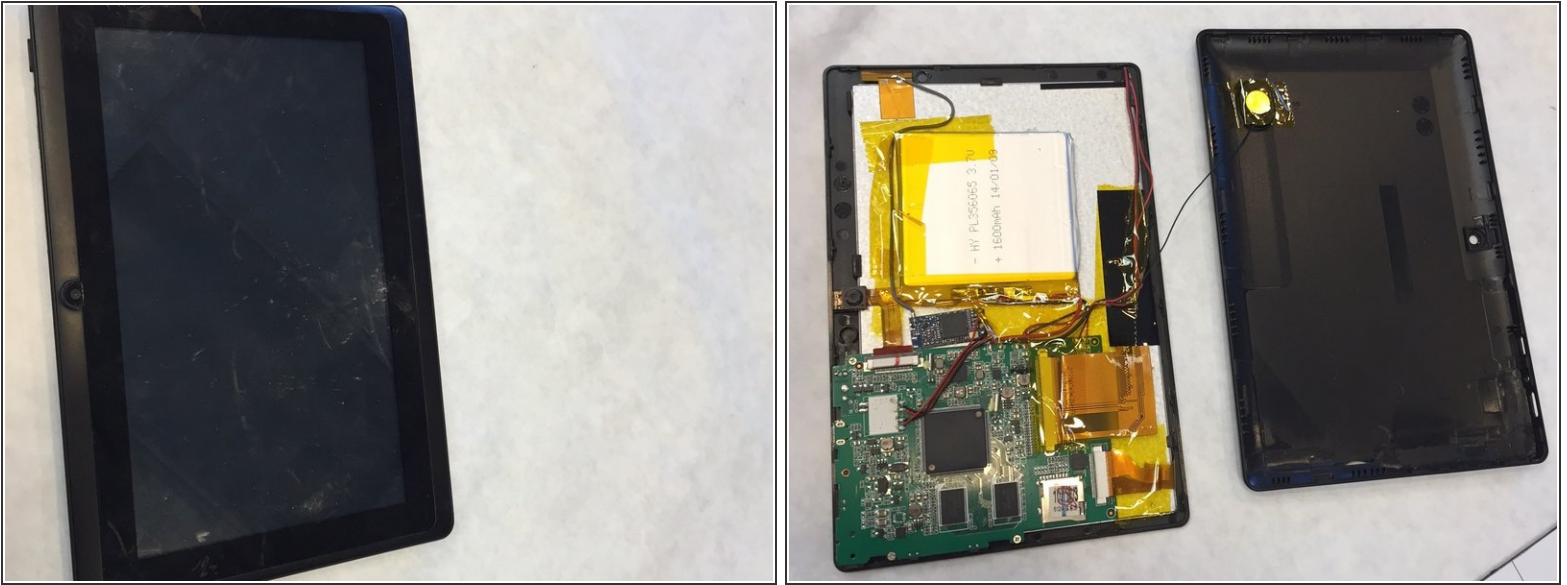

- Slide the flat end of the spudger under the front edge of the screen and carefully pry it open.
- ⓘ The front edge is the side with the buttons on it.
- ✦ You may hear a cracking sound when pulling the case off of the device. This is normal, and is just the clips being pulled apart. However, be careful and pull the clips slowly/cautiously to avoid damage.
- ⚠ Be aware of the speaker cable when removing the case, as it is still attached to the motherboard.

Step 2 — Tape Removal



- Locate the Speakers; they should be attached to the case as shown.
- Follow the wires back to the motherboard, removing all tape covering the wires along the way.
- ⓘ This will make it easier to move the wires around.

Step 3 — Desoldering Speakers



- Desolder the black wire from the motherboard. This will separate the speakers from the board, allowing you to replace them.

⚠ Exercise EXTREME caution while soldering. It is very easy to burn yourself, or damage the surrounding components. For a basic guide of how to desolder, follow this link:
<http://www.dummies.com/programming/elect...>

To reassemble your device, follow these instructions in reverse order.