



# iNet M1001 USB Port Replacement

Replacing the USB port of iNet M1001.

Written By: Abdulateef Abola



# INTRODUCTION

This guide will show users how to replace the USB port of the iNet M1001. This guide is for you if the USB port of your iNet M1001 tablet has gone bad and now needs replacing. To complete this guide some soldering is required.



## TOOLS:

- [Suction Handle](#) (1)
  - [Soldering Iron](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Back Cover



- Remove the two 4.1 mm PH1 screws with a Philips screwdriver.

## Step 2



- Press the small suction cup on the back cover, and then pull the small suction cup to remove the back cover.

## Step 3 — USB Port




- Remove the two 3.8 mm PH1 screw with a Philips screwdriver.

## Step 4



- Remove the USB port from it's plastic housing.

## Step 5

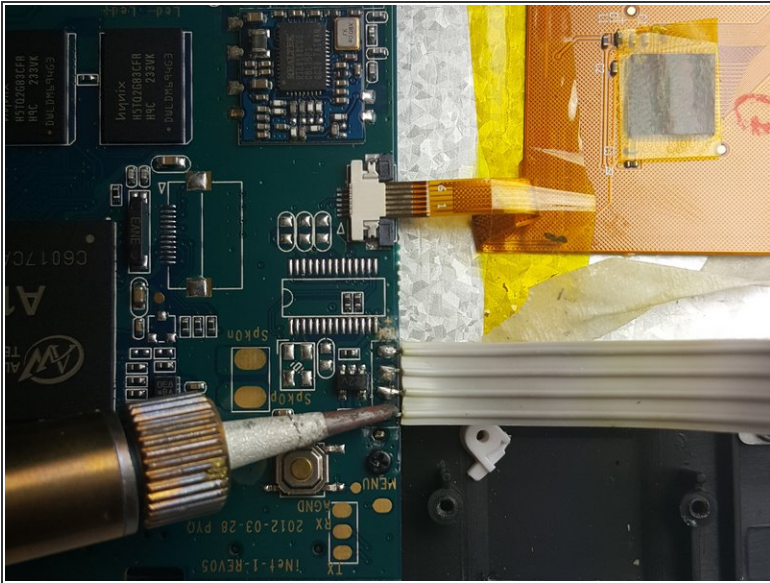

- Desolder the white wire, and pull it off of the motherboard.
- Check out [this awesome guide](#) for tips on soldering and desoldering.

To reassemble your device, follow these instructions in reverse order.