



BLU Vivo 5 Mini Back Cover Replacement

How to replace a BLU Vivo 5 Mini back cover.

Written By: Kymari



INTRODUCTION

Use this guide to replace any piece inside your BLU Vivo 5 Mini.

This guide instructs you to remove the back panel encasing; with the purpose to remove internal items such as battery, camera, speaker, charging port etc.


For better performance and a longer lasting charge: Drain battery below 10% , and then proceed to charge it without interruptions to 100%.



TOOLS:


- [SIM Card Eject Tool](#) (1)
 - [Tweezers](#) (1)
 - [Spudger](#) (1)
 - [P2 Pentalobe Screwdriver iPhone](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Back Cover

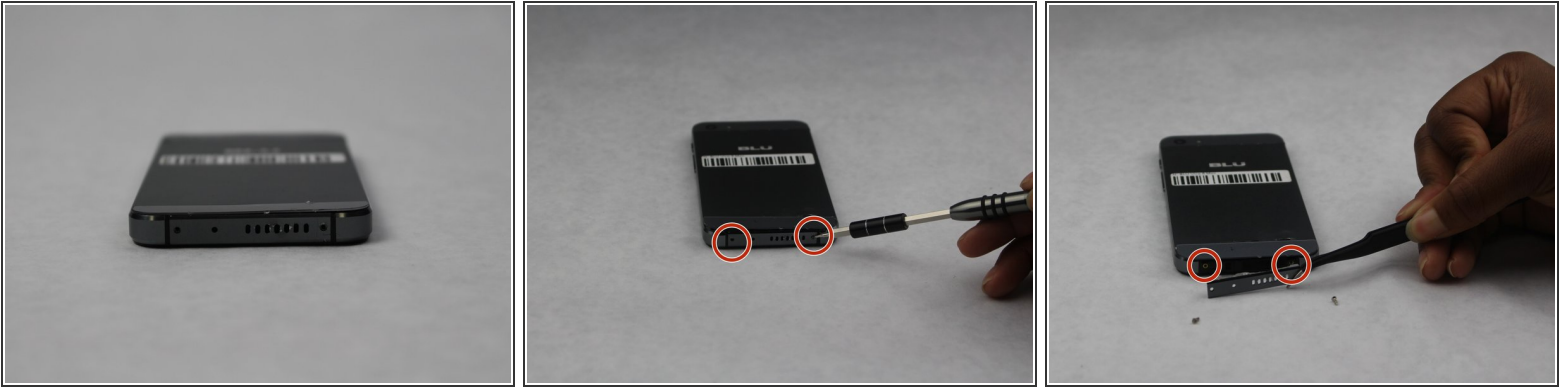


- Remove the 2 screws along the bottom on either side of the speaker port with the size 2 Pentalobe driver.
- After screws are removed, dislodge the speaker and charger port cover from device using the tweezers.

Step 2

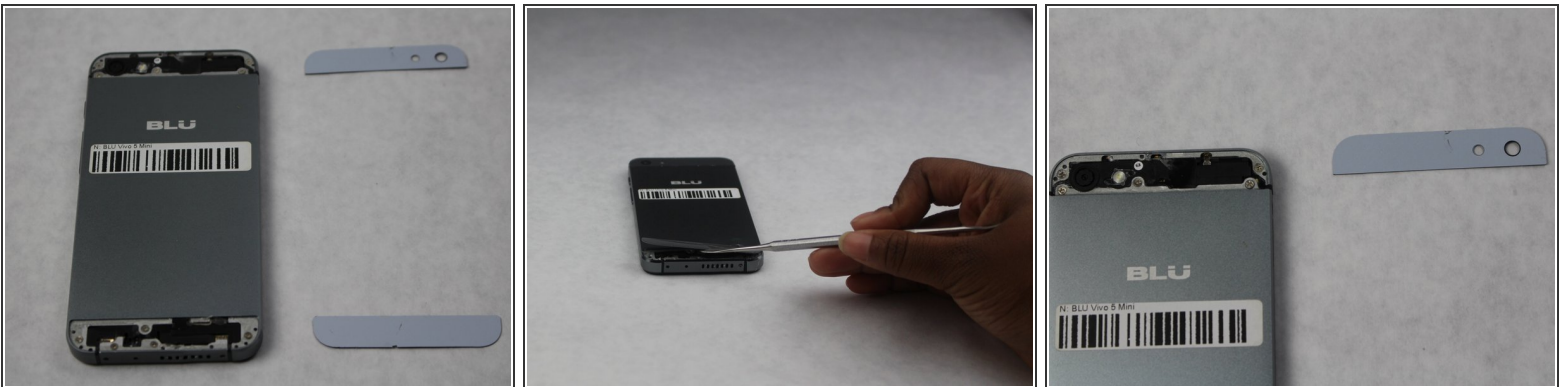


- Remove the top and bottom covers.
- Start by sliding the pick around the edges of both covers. (If you have the glue adhesive removal tool use that instead of pick, as it creates less damage.)
- After freeing the edges gentle start peeling the covers off.

Step 3

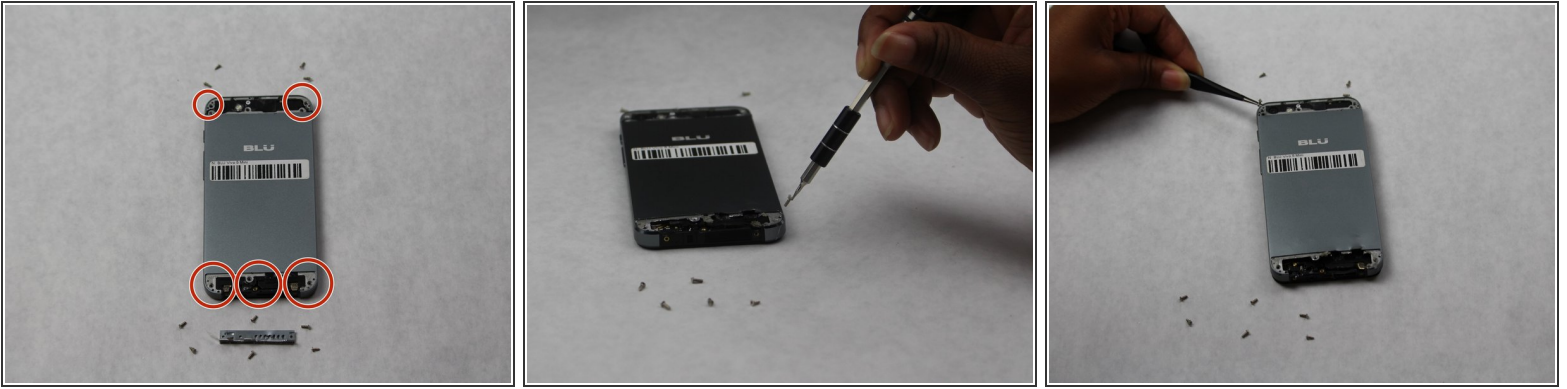

- Using a Phillips #000, remove all 10 screws found on the back of the phone.
- The 6 on the bottom are to be removed with a size PH000 Phillips Head screwdriver.
- The 4 on the top can be removed with the same screwdriver.

Step 4

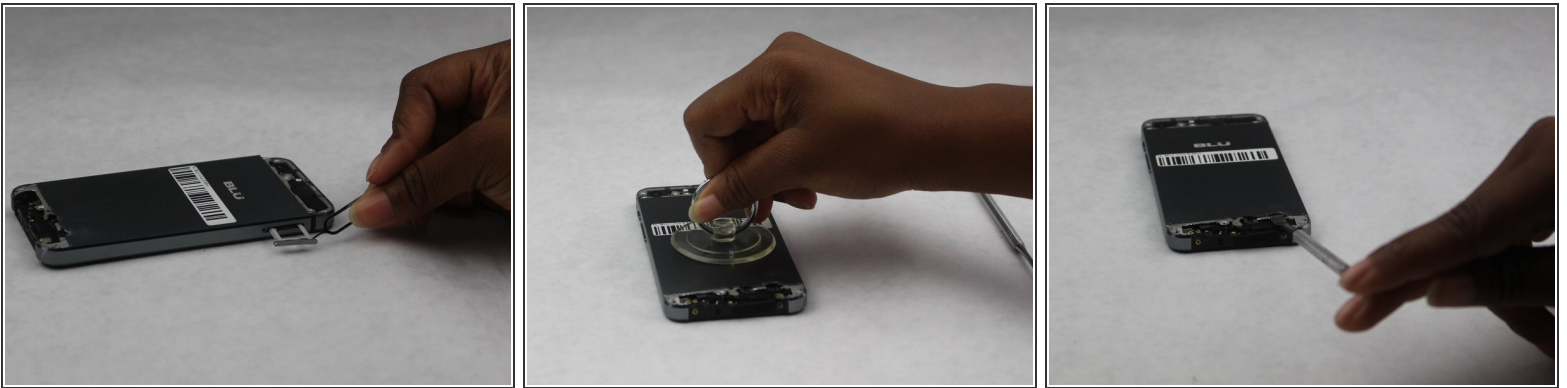

- Completely remove SIM card port from side of phone using the SIM Card Eject Tool.
- Release the back cover (it may be glued down encasing the phone) using the suction device to lift the back off.
- Begin inserting the pick sliding it between the back of the phone and the cover to completely remove back cover, if suction does not lift.

To reassemble your device, follow these instructions in reverse order.

You can also use steps 1-4 for any other internal replacement.