



Nokia Lumia 925 Display Replacement

How to replace a Nokia Lumia 925 display.

Written By: Guillermo Lara





TOOLS:


- [T7 Torx Screwdriver](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Motherboard




- Remove the sim card holder by inserting tweezers into the hole. Push down and the holder will spring back up.
- Pull out the holder until it is completely separate.
- ⓘ Something like a paperclip will work if there are no tweezers available.

Step 2

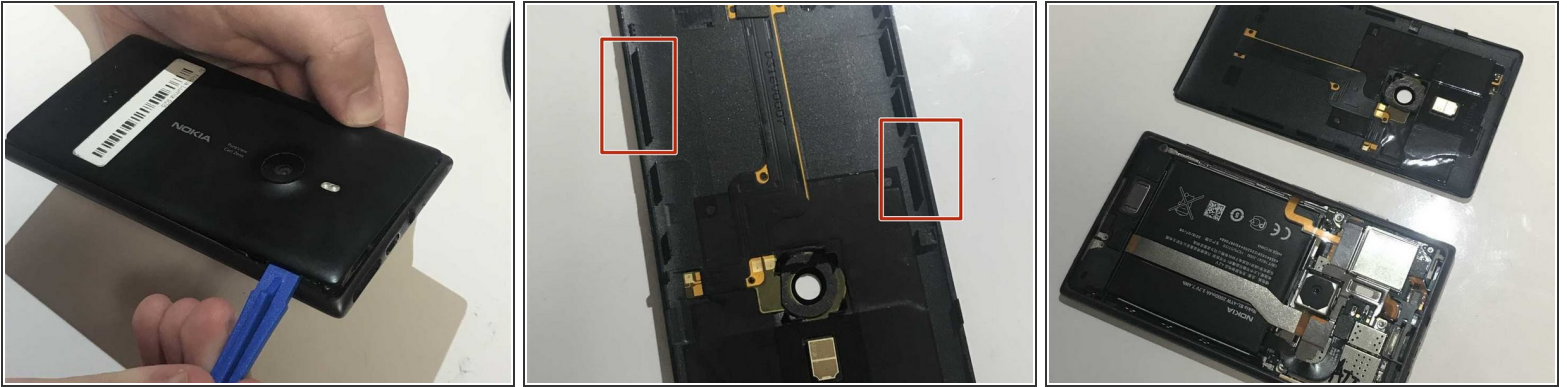

- Slide a plastic opening tool under the back cover.
 - Slide the tool around the outsides of the cover to fully dislodge the pins holding the cover to the phone.
- ⚠ Some pins are facing the opposite way from the others.

Step 3

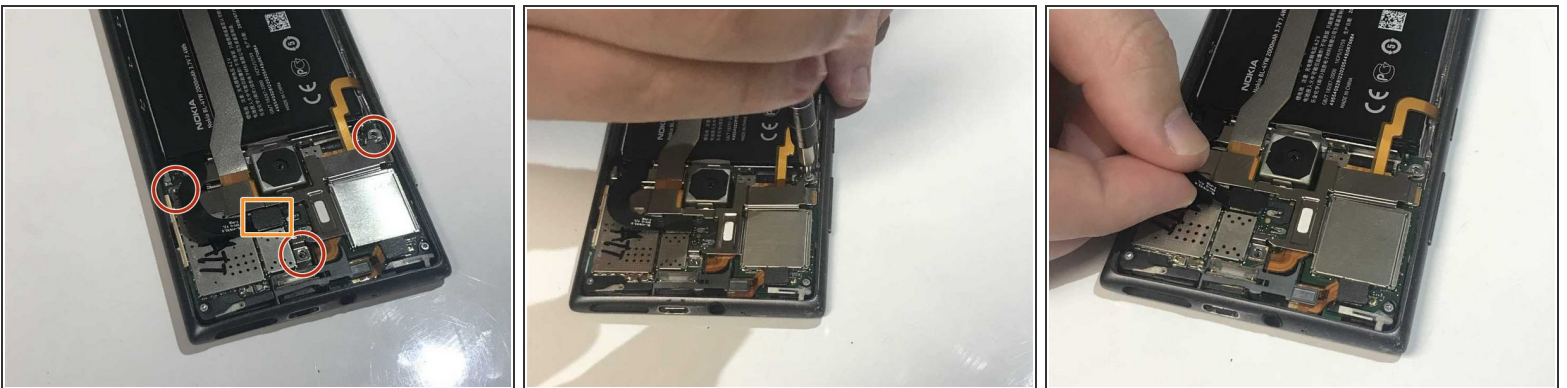

- Remove the 3 screws using the T7 Torx screwdriver.
- Unclip the black tab connector.

Step 4



- Remove the silver metal cover.


⚠ Be careful of the tape under the right square side of the panel. Using a spudger helps.

Step 5



- Unclip the two orange tabs.
- Remove the four silver screws using the T5 Torx screwdriver.

Step 6

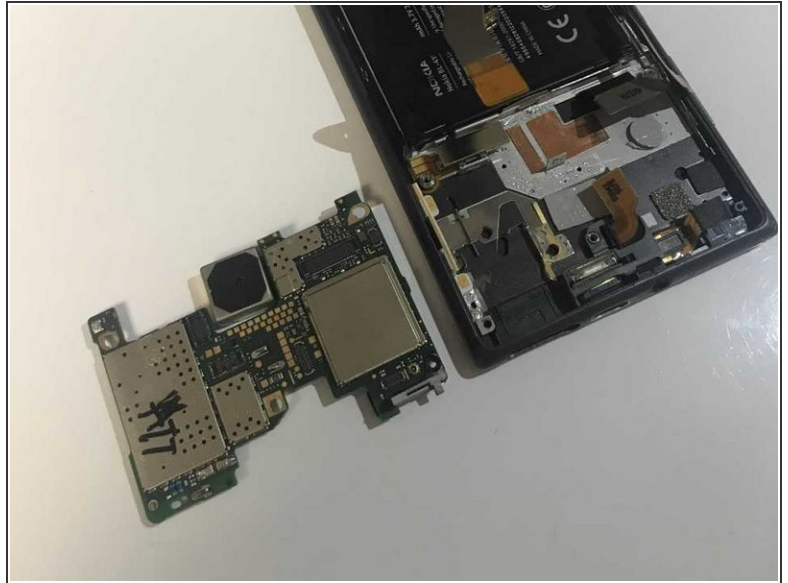

- Remove the motherboard by sliding tweezers between it and the back of the screen. Lift up.

Step 7 — Display



- Push the screen from the inside of the phone.
- Pull the screen off.
- ⓘ Slide the electronic strip through the small opening.

To reassemble your device, follow these instructions in reverse order.