




Tolino Vision Batterie Replacement

Here is the corrected text:...

Written By: Micha

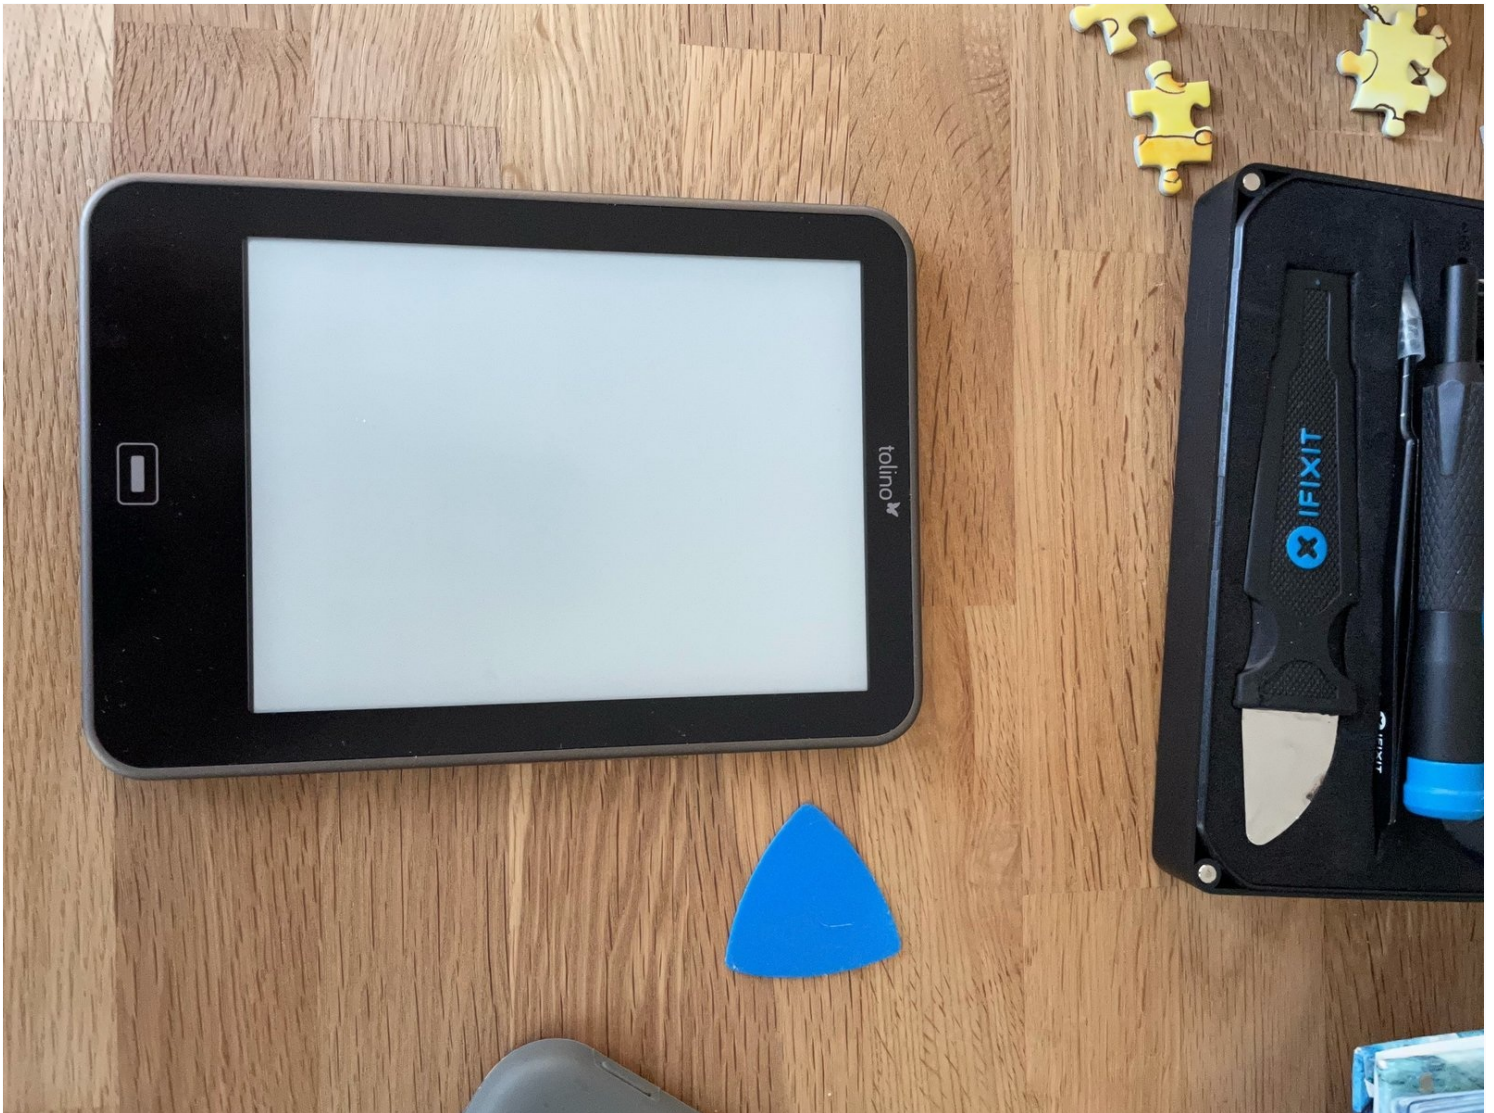


INTRODUCTION

Here is the corrected text:

My Tolino E-Book Reader's battery was so discharged after about a year of non-use that it had to be replaced with a new one.


A type PR-285083 battery is needed (3.7V /1500mAh) battery. The price is about 14€.

Step 1 — Batterie

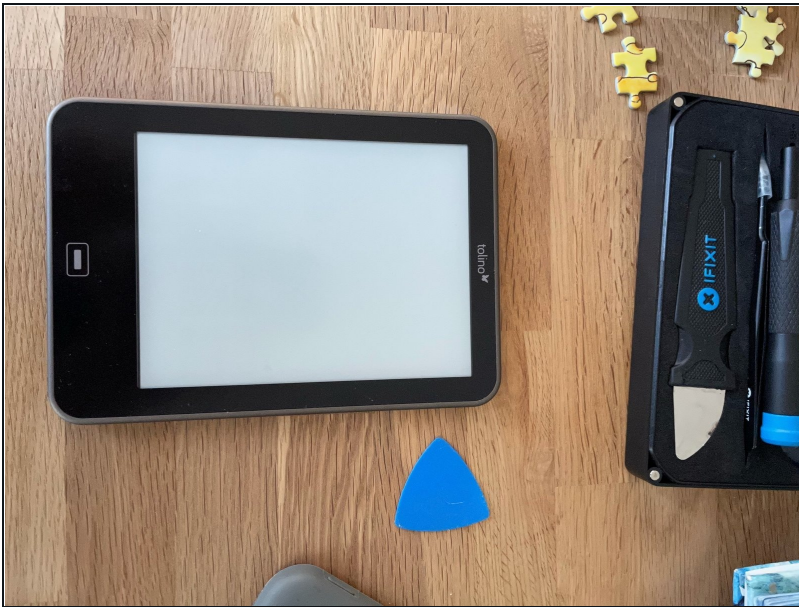


- First, open the edge of the Tolino with a spudger or pick. The lid is only clipped and can be opened easily.

Step 2

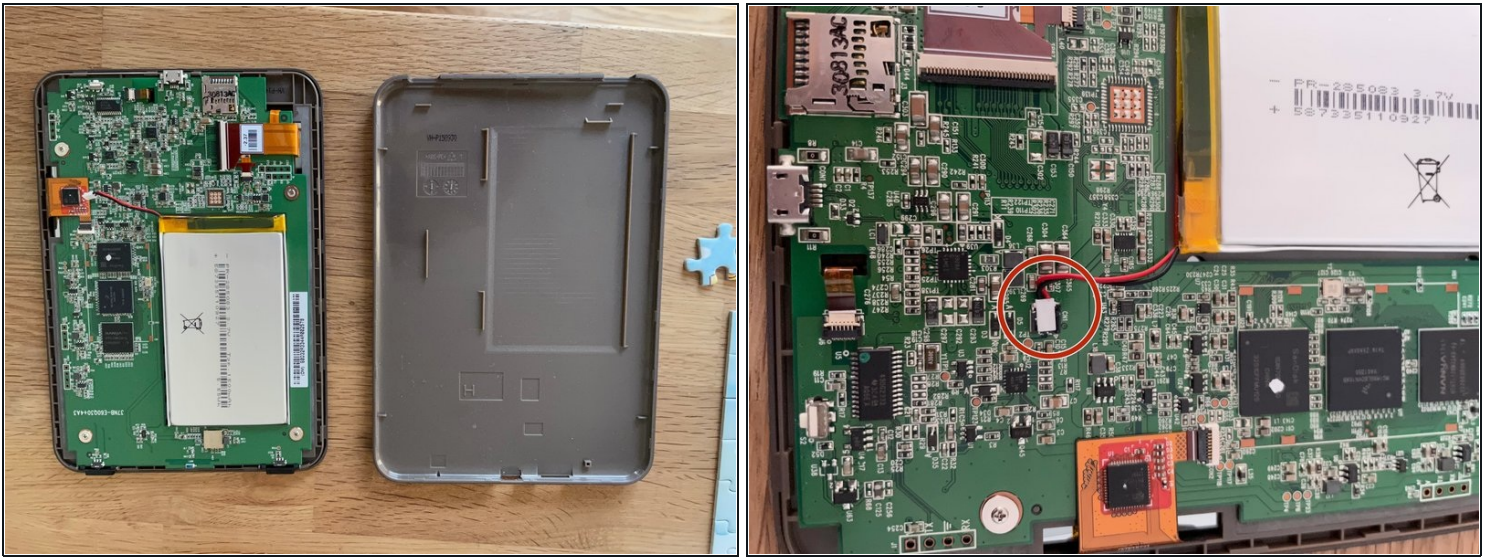


- Now disconnect the battery cable. Carefully pry it off from below.

Step 3

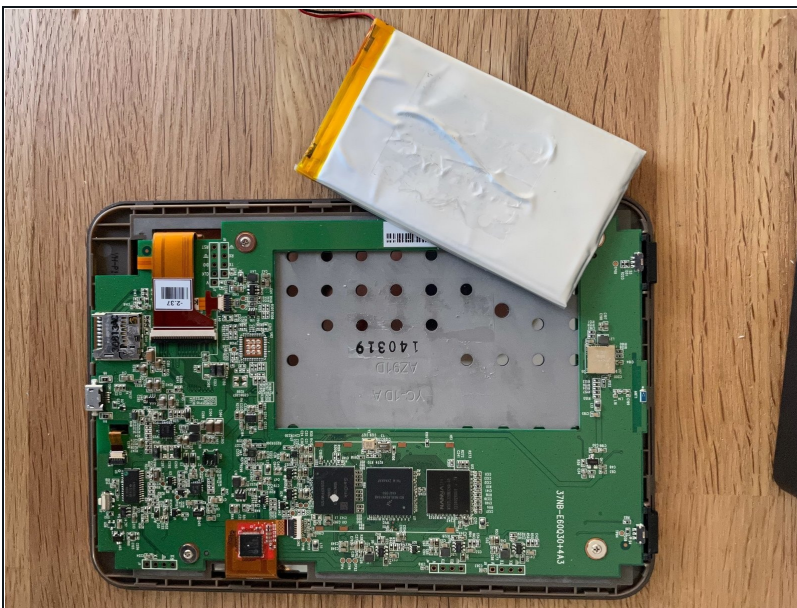


- The battery is secured in the middle with fairly strong tape. Carefully slide a spudger underneath and loosen it.

Step 4

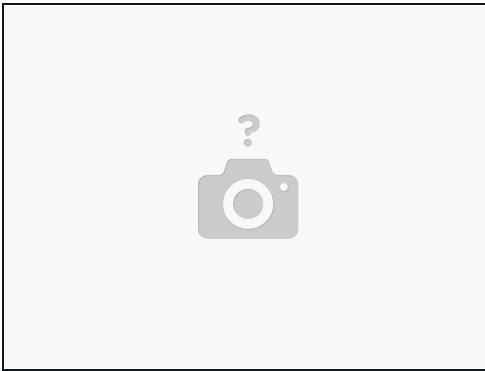

- Glue in the new battery and connect it.

Step 5

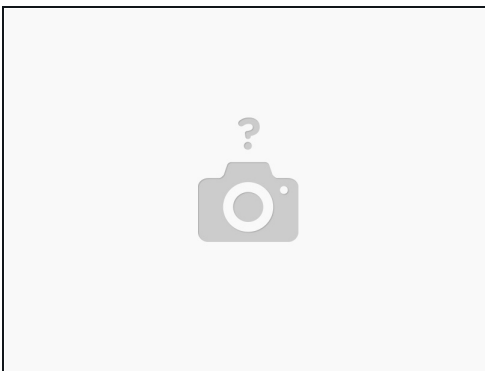

- Clip the housing back on and switch on the Tolino.

Work through the steps in reverse order to reassemble your device.