



Asus Zenfone 4 Max Camera Replacement

How to replace a Asus Zenfone 4 Max camera.

Written By: Maegan West



INTRODUCTION

Tools needed include an iFixit opening tool, a metal spudger, a removable head screwdriver with a T3 bit and a PH0 bit, and needle-nosed tweezers.



TOOLS:


- [Tweezers](#) (1)
 - [T3 Torx Screwdriver](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Camera




- Using a removable head screwdriver and a T4 bit, remove the screws on the base of the phone on either side of the charging port.

Step 2

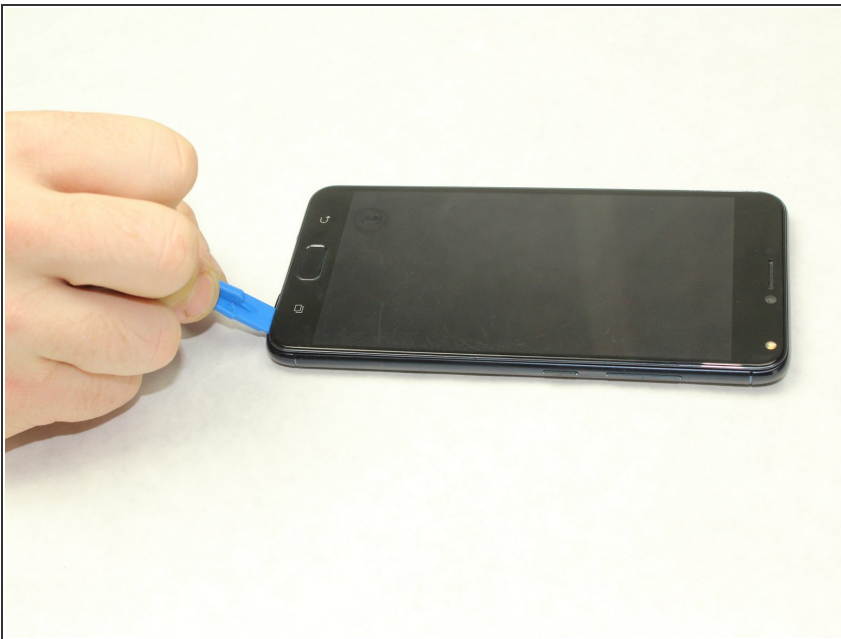


- Starting near either of the 4 corners of the device notice the seam of the case around the front of the device.
- Begin using the opening tool with a moderate amount of force to wedge between the back case and the phone.
- Gently move the tool around the edges towards each corner until the back is removed.
- ⓘ You will be able to hear the back casing pulling apart from the phone. Do not be alarmed, but work gently with the device.

Step 3

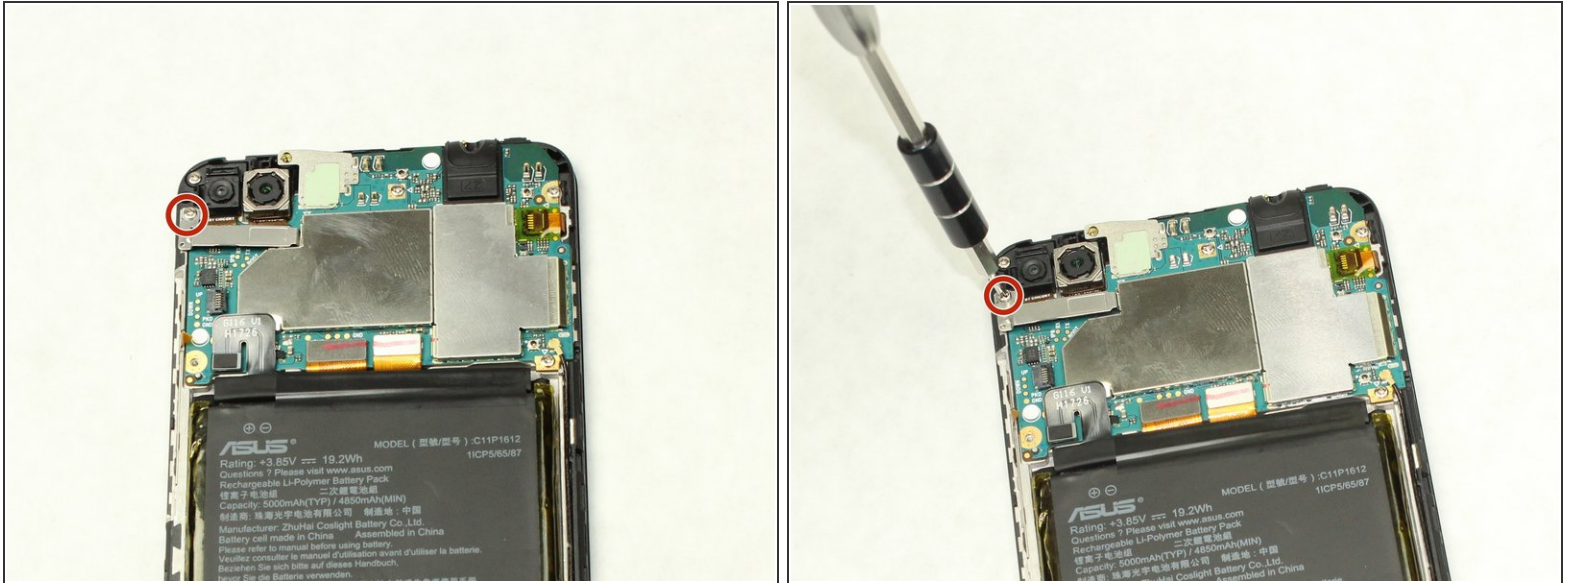

- Using a removable head screwdriver and a PH0 bit, begin removing the panel beneath the two cameras by unscrewing the screw.

Step 4

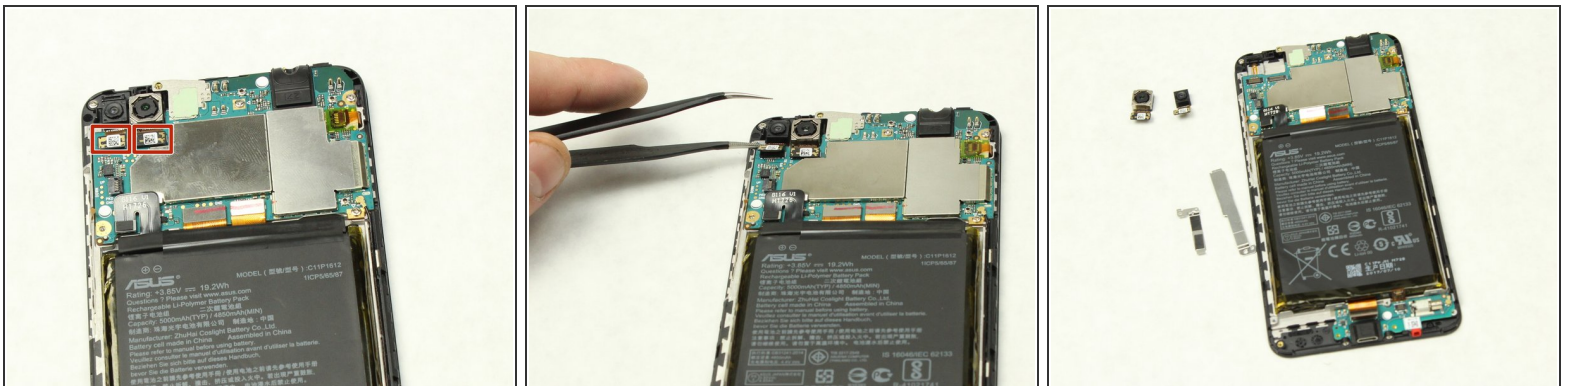

- Use the tweezers to gently pull up on the flaps beneath the two cameras.
- Completely remove the cameras and replace with the new cameras.

To reassemble your device, follow these instructions in reverse order.