



# iVIEW-754TPC Battery Replacement

Use this repair guide to replace the battery on the iVIEW-754TPC.

Written By: calvin



# INTRODUCTION



Is your device no longer holding a charge? Use this guide to replace a faulty or worn out battery.



## TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [Soldering Iron](#) (1)
  - [Tweezers](#) (1)
-


## Step 1 — Rear Panel

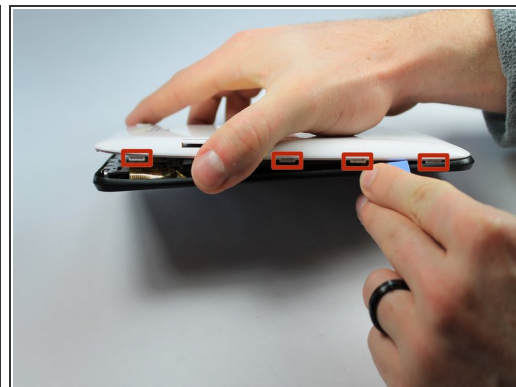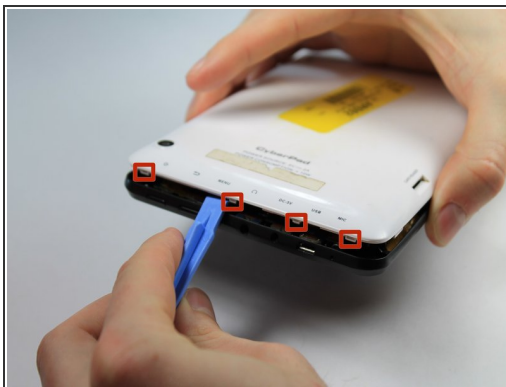

**i** Before disassembling your tablet, make sure it is powered off.

- Use plastic opening tool to release the clips holding the device together. The clips will take a small amount of pressure to release. Once you have the plastic opening tool inserted, use a twisting action to release the clips. Start from bottom of device and work all the way around.


## Step 2 — Remove Battery

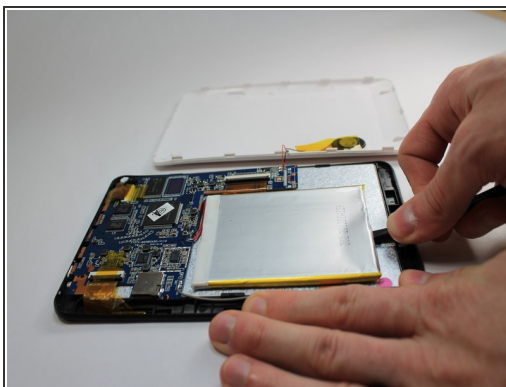

- Use flat side of the spudger to get under battery and use pressure to release from glue. Do this all the way around battery until it comes off.

**i** At this point do not attempt to fully remove the battery as it is still attached to the logic board.

## Step 3 — Desolder wires

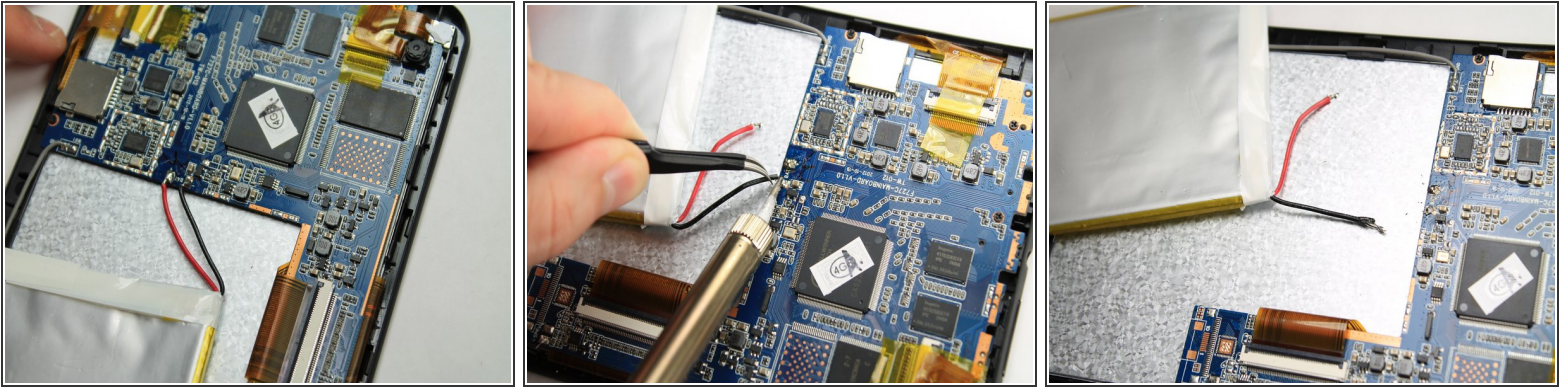

- Once battery is off, the wires will still be connected to motherboard. You will need to desolder the wires.
  - Using the soldering tool, use the heat to melt the connection. As you do this, pull on the wires with a tweezer until wires comes off.
- ☒ To ease reassembly, take note of which wire goes to the negative and positive terminals.

To reassemble your device, follow these instructions in reverse order.