



iView-776TPCII Battery Replacement

Replace the battery on your iView-776TPCII.

Written By: Cory Gratzner




INTRODUCTION


If your tablet fails to hold a charge, use this guide to replace your worn out battery. It is important that the device be completely powered off before proceeding. In addition, one must take care not to puncture or snap the battery while prying it free. This guide will also require the desoldering of two wires connecting the battery to the motherboard.


TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Portable Soldering Iron](#) (1)
 - [Tweezers](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Rear Panel

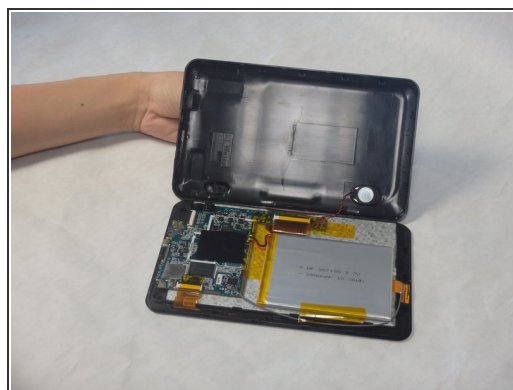

 Before disassembling your device, make sure that the power is completely turned off.


- Use the plastic opening tool to release the clips holding the rear panel of the device onto the front section.
-  The clips may take some pressure before releasing.
- Continue around the entire device until all of the clips have been released.

Step 2




- Use a spudger to carefully free the speaker from it's housing on the back panel.
 - Place the spudger between the speaker and the rear panel. Use a prying motion to remove the component.
- ⚠ Be careful not to apply an over amount of force. If care is not taken, the speaker could break under the pressure.

Step 3 — Battery

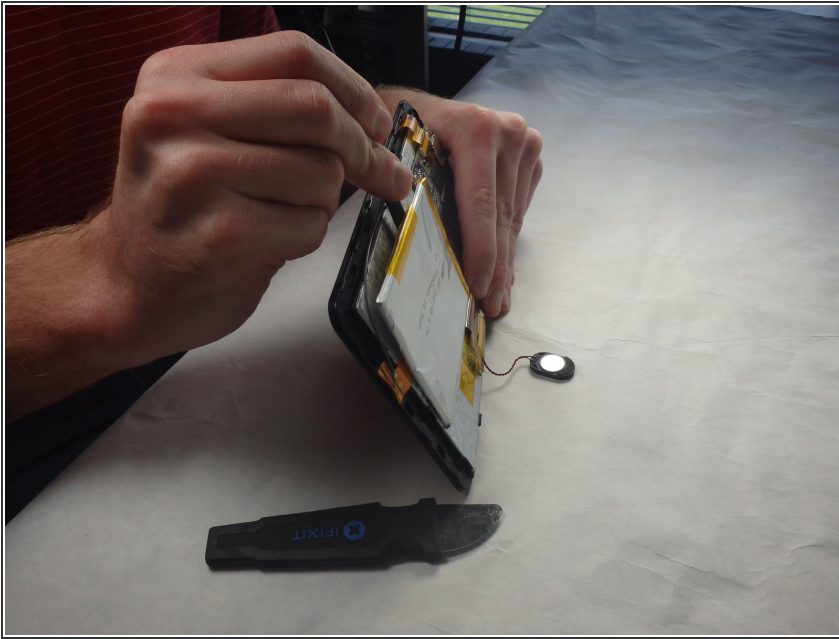


- Insert the flat side of the standard spudger underneath the battery and use a prying action to loosen the glue holding it to the digitizer.
- Do this all around the battery until it comes off.

 The glue is strong, so some force may be required. However, be careful not to apply so much pressure that the battery bends or breaks.

- ⓘ At this point, do not attempt to fully remove the battery, since it is still connected to the motherboard.

Step 4

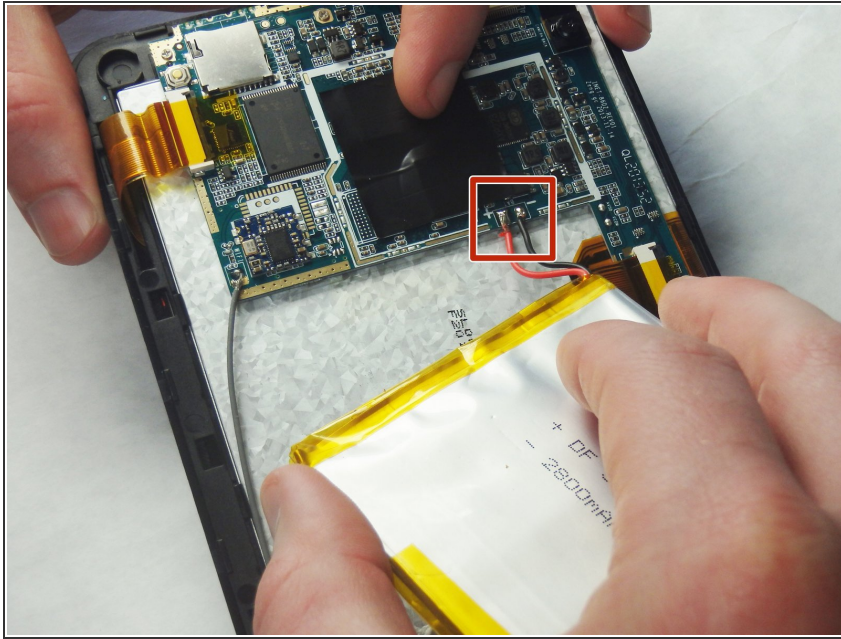

- Use the Portable Soldering Iron tool to heat the leads coming from the battery to the motherboard, thereby breaking the connection.
- ⓘ For help on soldering, refer to the iFixit "[How To Solder and Desolder Connections](#)" technique guide as necessary.
- Once heated, use tweezers to pull the wires free from their connections.
- ★ To ease reassembly, take note of which wire went to the positive and negative terminals.

To reassemble your device, follow these instructions in reverse order.