




# Oregon Scientific Meep! 4.0 Motherboard Replacement

Follow the steps in this guide to replace the Motherboard of your Oregon Scientific Meep! 4.0

Written By: Lauren Milici

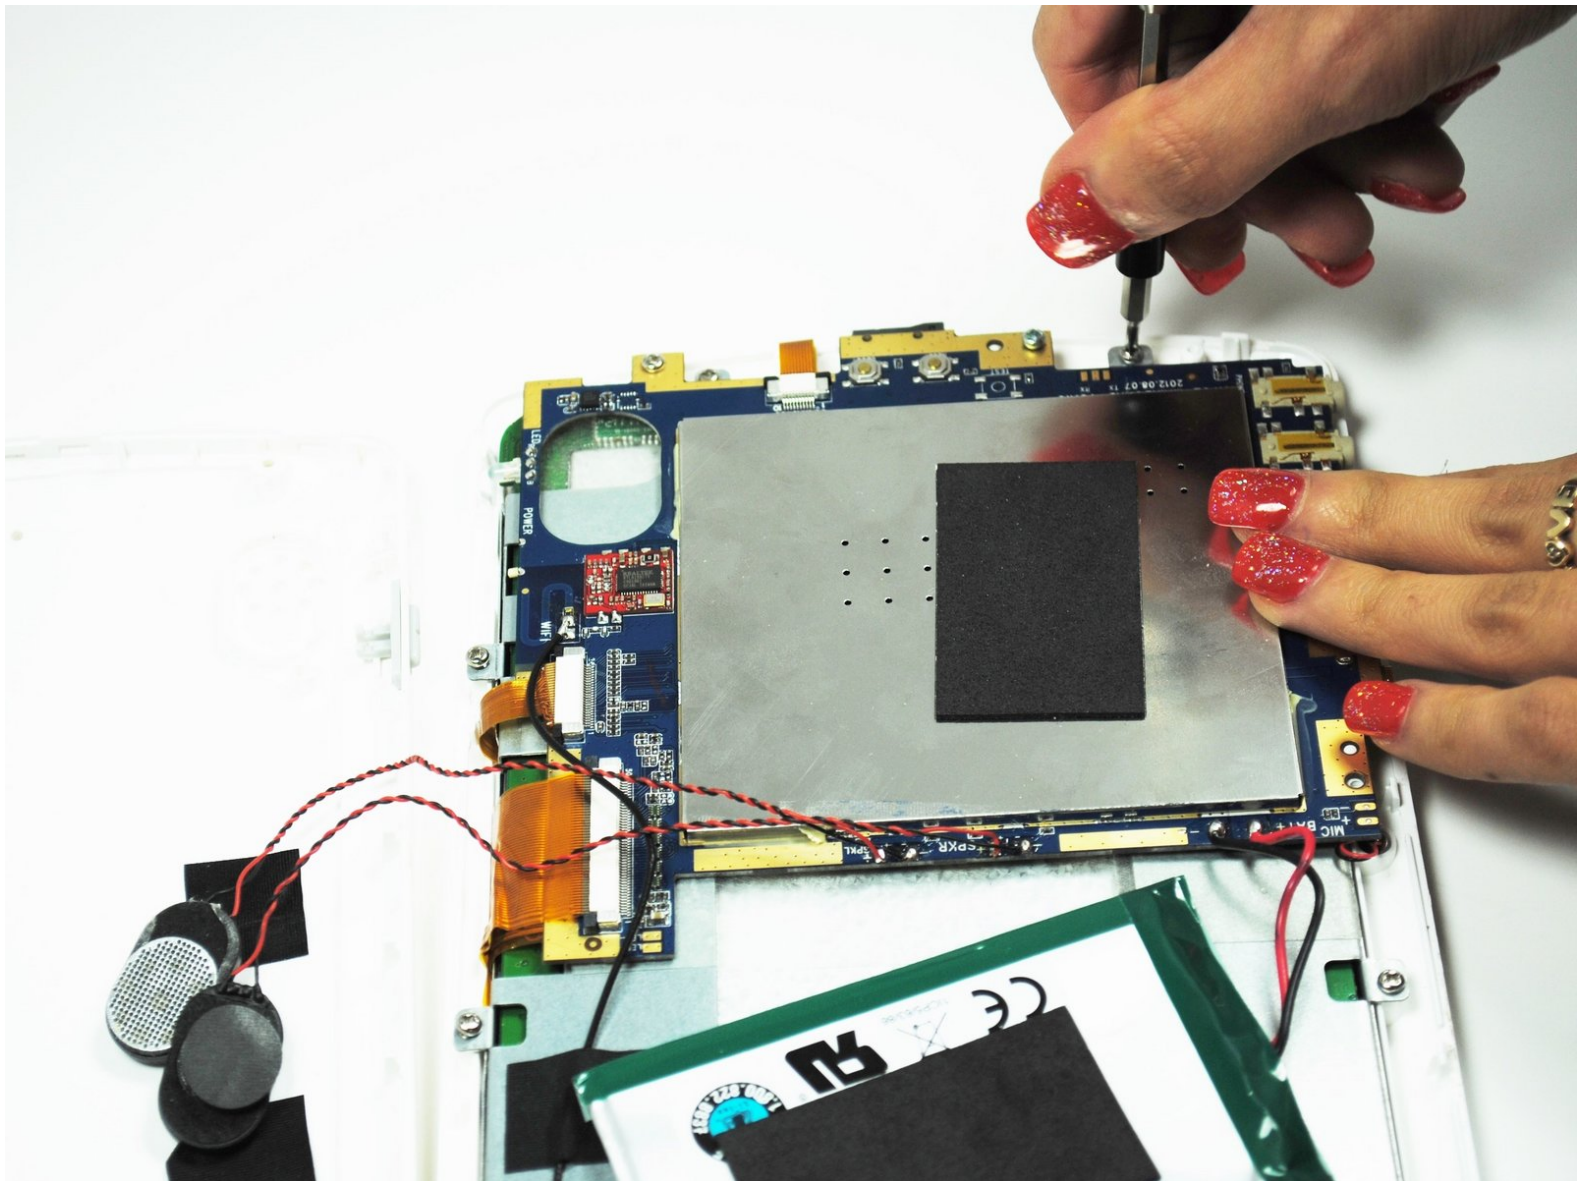

## INTRODUCTION


By following the steps in this guide in order, you will be able to remove and replace the broken motherboard of your Oregon Scientific Meep! 4.0 tablet.

---

### TOOLS:

- [Screwdriver](#) (1)
  - [Soldering Iron](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Oregon Scientific Meep! 4.0 Disassembly

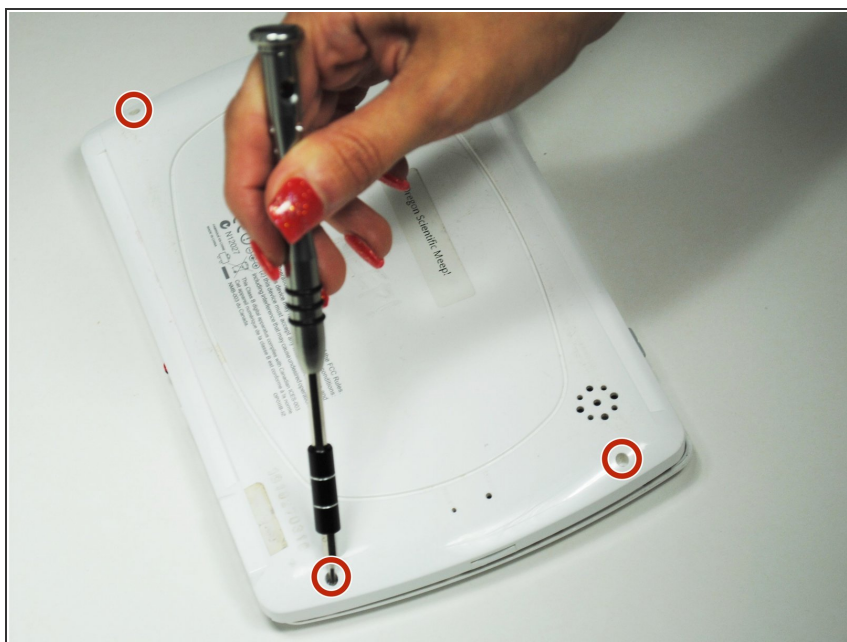

- Use a screwdriver to remove the four 7.0 mm Philips #00 screws from the back of the device.



## Step 2



- Use a plastic opening tool to detach the clips on the inside of the device.




## Step 3 — Motherboard

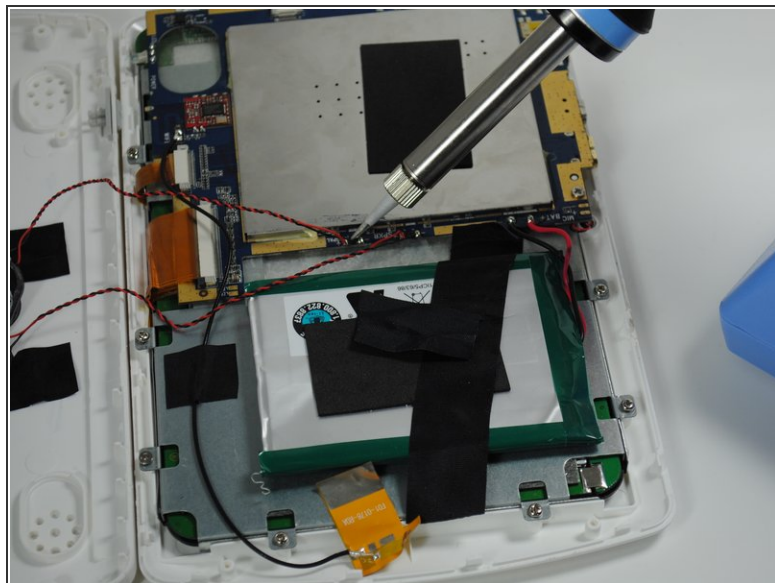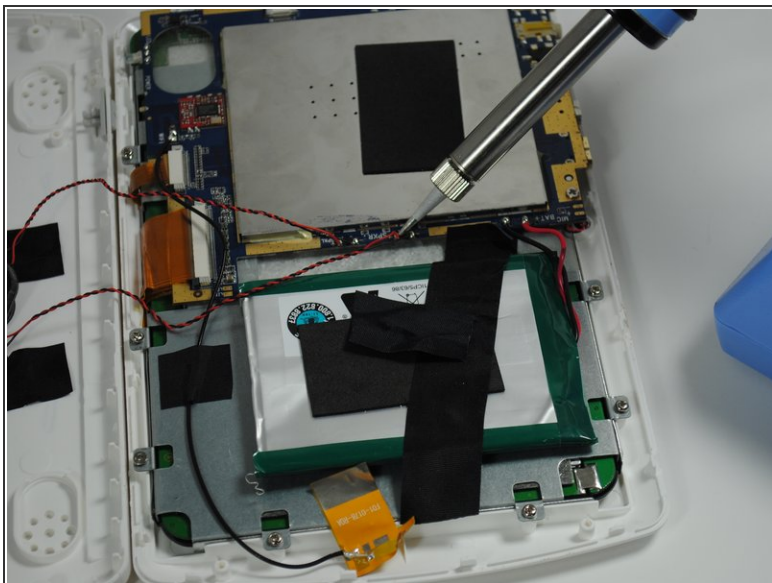


- Use a soldering station to disconnect any wires attached to the motherboard.

## Step 4

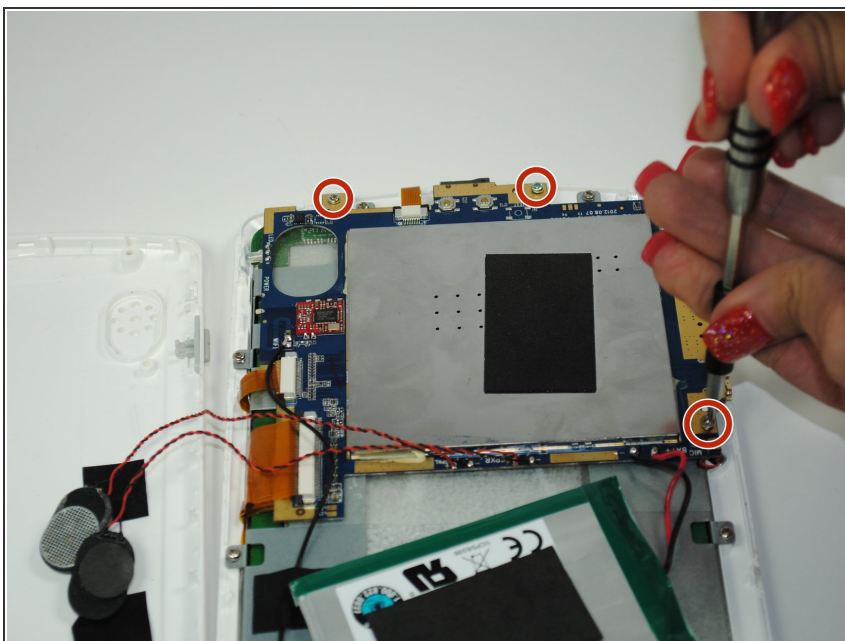

- Use a screwdriver to unscrew the three 4.0 mm Philips #00 screws holding the motherboard in place.

## Step 5

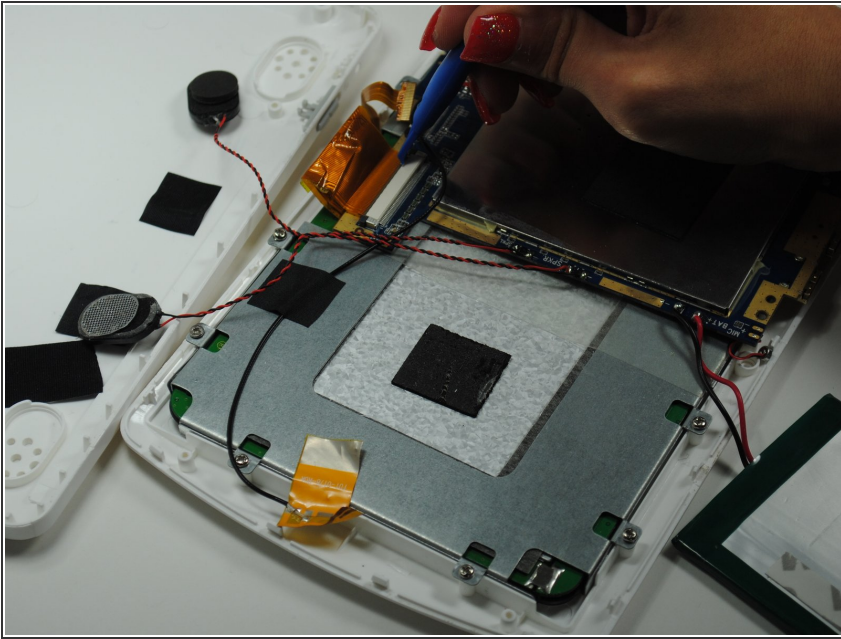

- Use a plastic opening tool to release the ribbon cables surrounding the motherboard.

To reassemble your device, follow these instructions in reverse order.