




Uniden Guardian G955 Battery Replacement

This guide shows how to replace the battery of the Uniden Guardian G955.

Written By: Sundus Al Shibani

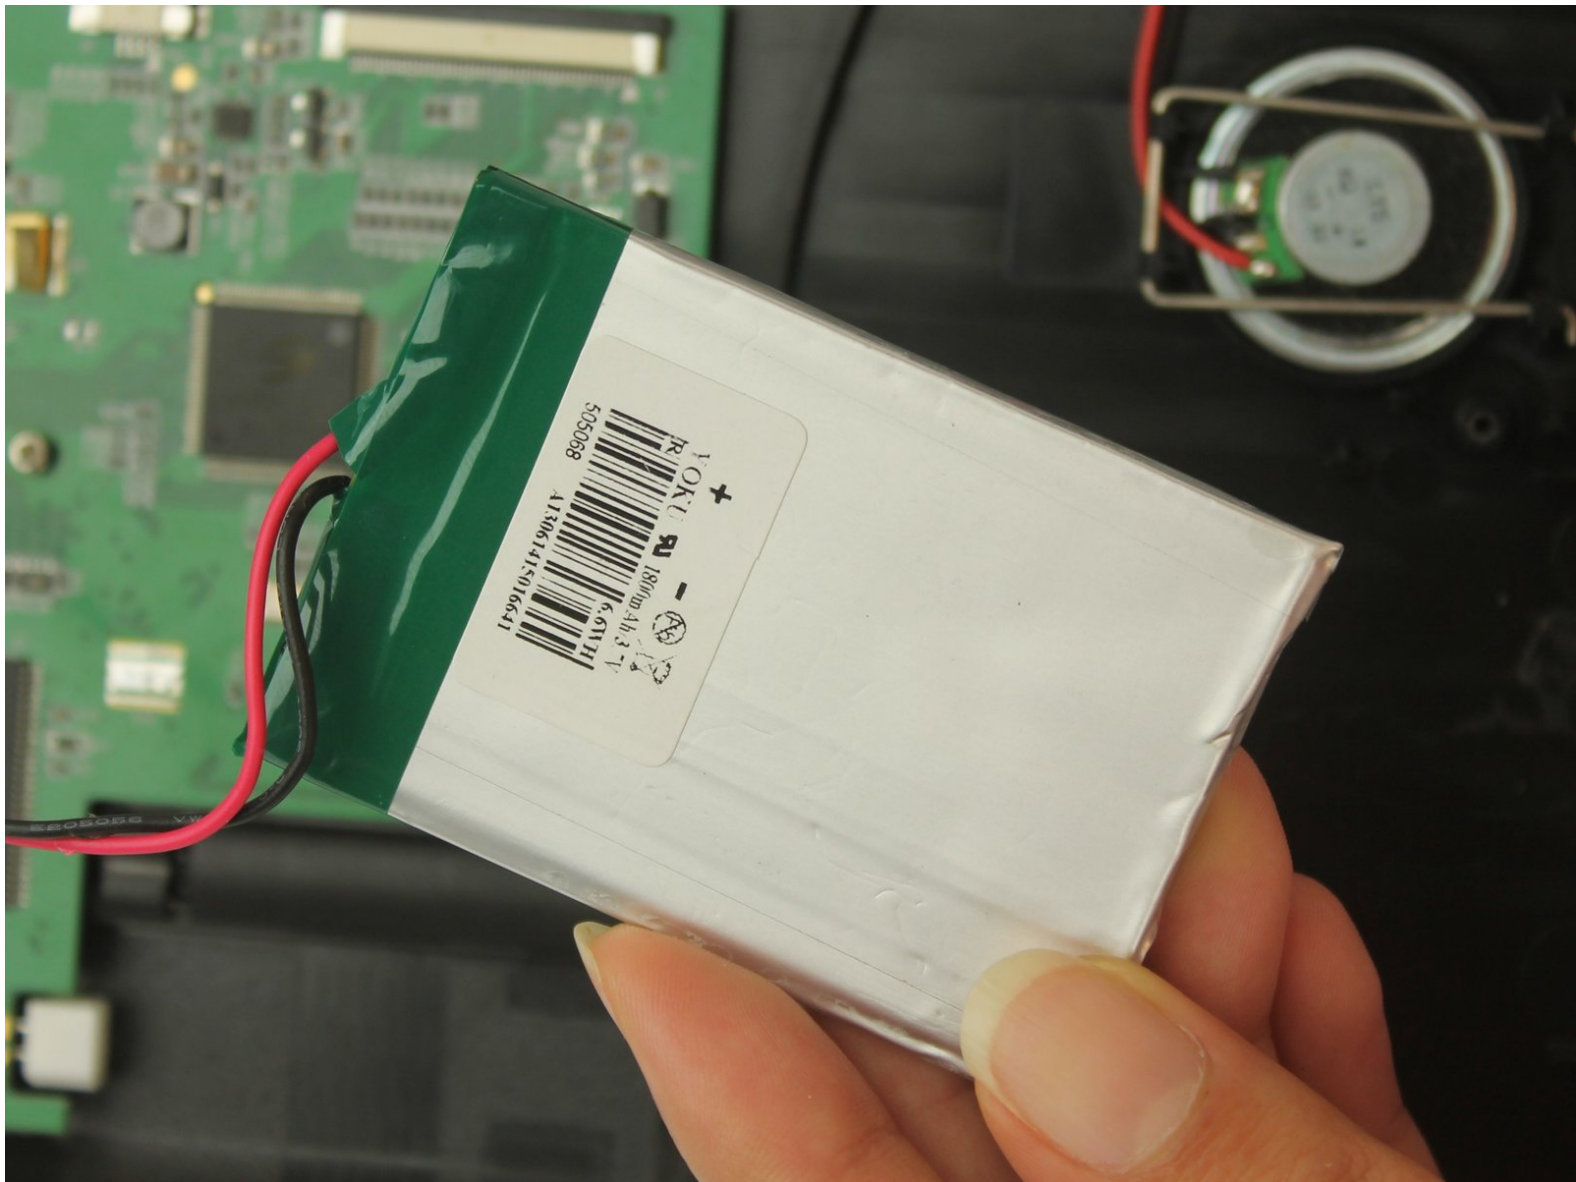

INTRODUCTION

If your Uniden Guardian G955 has lost its ability to hold or maintain a charge despite charging with the given adapter, you have a dysfunctional battery that needs to be replaced.

A working battery is necessary in order for your Uniden Guardian G955 monitor to turn on and display images and recordings captured by the surveillance system. If you have noticed that your monitor is not charging or holding a charge despite using the given adapter and trying other power outlets consider giving your monitor a reset.

If upon a reset your monitor still doesn't hold a charge or turn on, you have a faulty battery that needs to be replaced.


Make sure your device is completely powered down and unplugged before you begin.



TOOLS:

- [J1 Screwdriver Bit](#) (1)
 - [Spudger](#) (1)
 - [Halberd Spudger](#) (1)
-

Step 1 — Battery

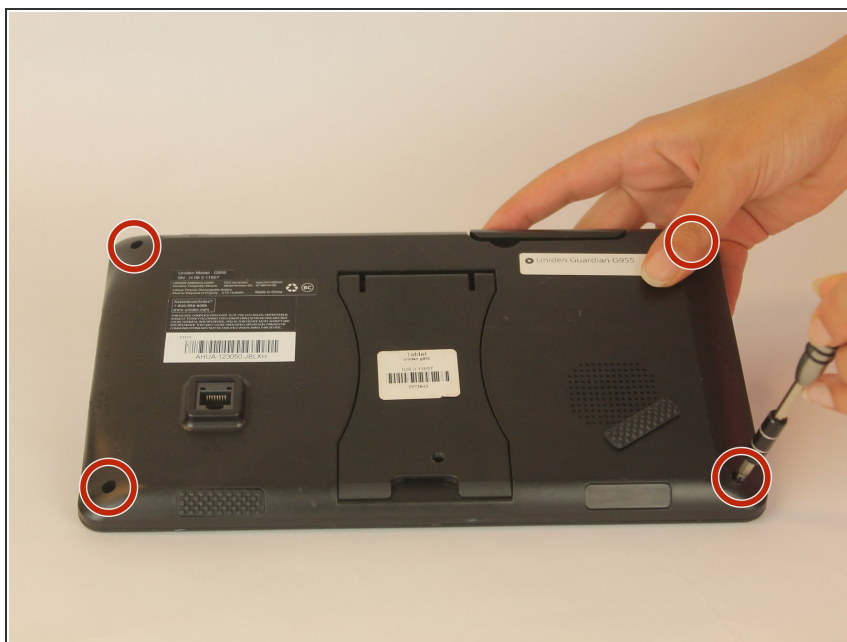



- First, remove four 6.1 mm screws from your monitor using a J1 Phillips head screwdriver.

Step 2





- Carefully, use a metal spudger to open the case starting from any corner.
- Slowly slide the spudger along the inside edge of the case.

Step 3

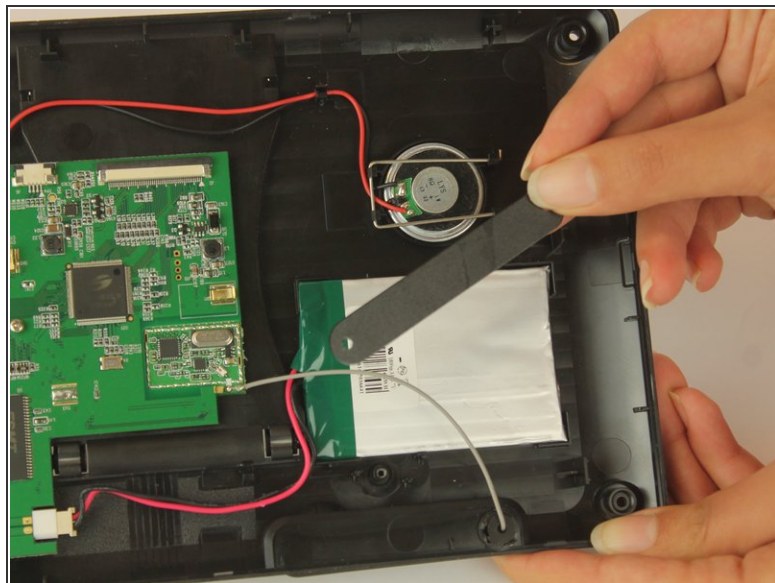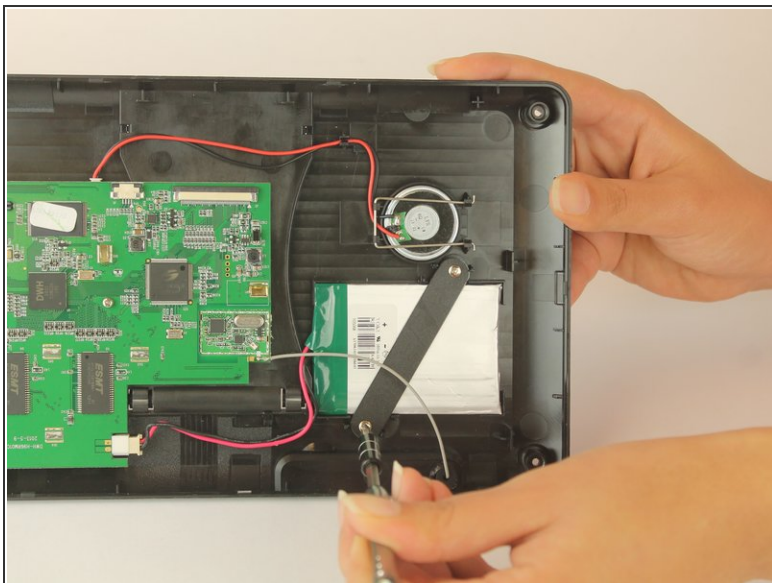


- Remove the two 6.1 mm screws from the black fastener using a screwdriver.
- Remove the black fastener.

Step 4

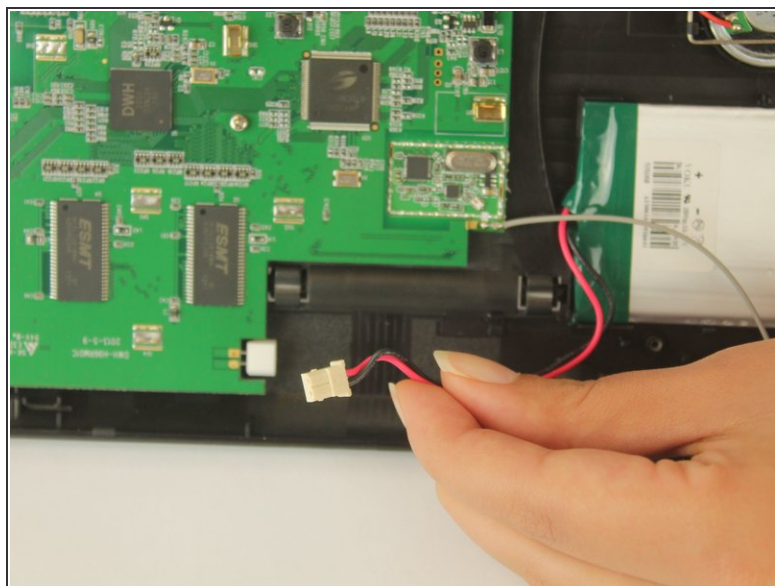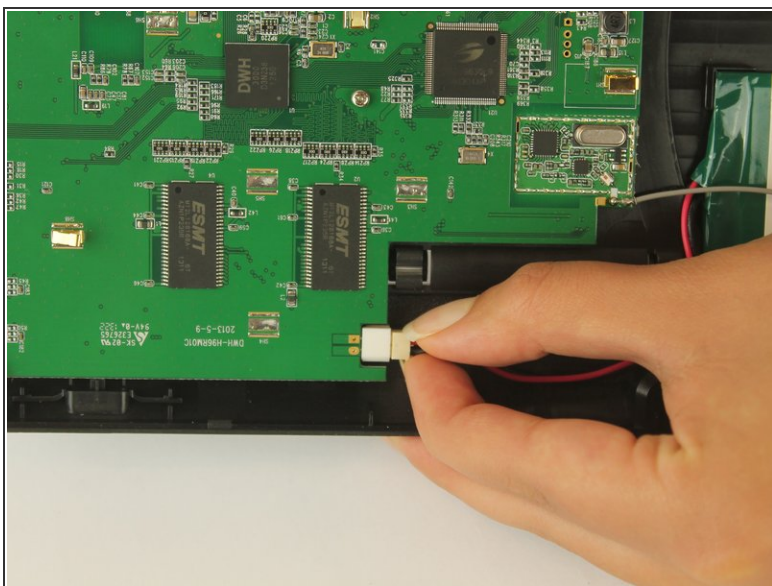

- Disconnect the head of the cable attached to the motherboard by pressing on the outer edge of the cable and sliding it out.

Step 5

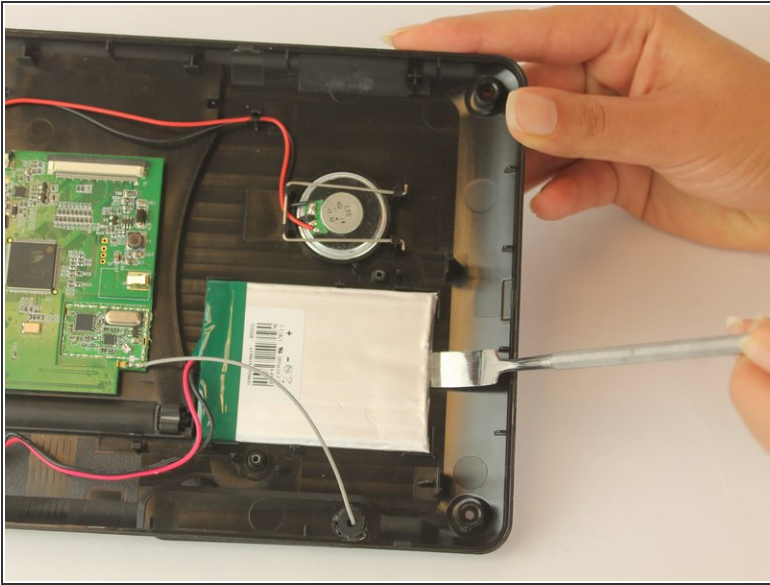

- Remove the battery from the case by sliding a halberd spudger below it. (note: the spudger shown is metal, to ensure proper safety, utilize a nylon or plastic spudger.)

To reassemble your device, follow these instructions in reverse order.