



Asus Vivobook Q301LA-BHI5T02 Wifi card Replacement

Replacing a defective Wifi card will help the laptop connect to the internet wirelessly.

Written By: Jorge Villarreal



INTRODUCTION

A defective Wifi card will prevent you from accessing the internet wirelessly. This guide will help replace it to fix this problem. Manipulating wires are necessary so be sure to remember where the wires are unplugged from.



TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #1 Screwdriver](#) (1)



PARTS:

- [Asus UL80J UL80V Wifi Wireless Card](#) (1)

Step 1 — Back Cover

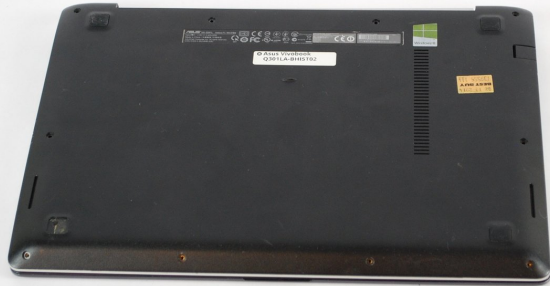

- ❗ Make sure the computer is turned off.
- Flip the device over so that the back cover is facing you.

Step 2



- Remove the four 5mm Phillips #1 screws from the top of the laptop.
- Remove the two 6mm Phillips #1 screws from the sides of the laptop.
- Remove the four 2mm Phillips #1 screws from the bottom of the laptop.

Step 3





- Use a plastic opening tool to gently pry the bottom of the laptop up. Slowly slide it along the edges, twisting it every so often to pop the bottom of the laptop out of the clips holding it in place.

Step 4



- Lift off the cover and remove the back cover from the device.

Step 5 — Wifi card

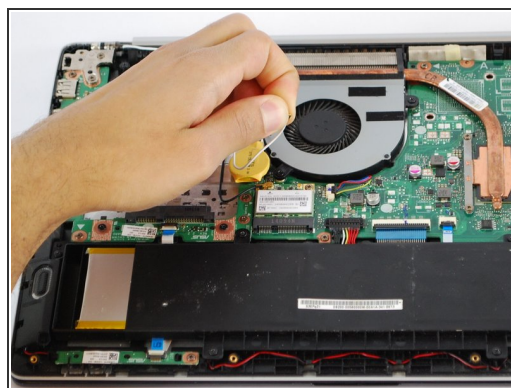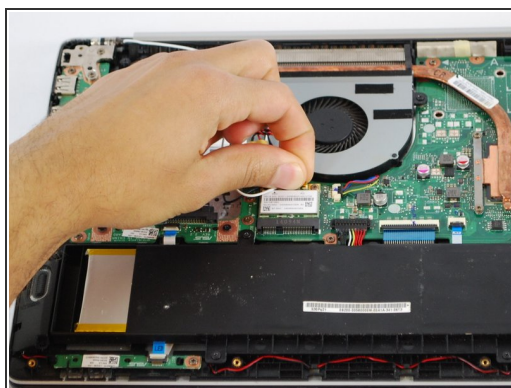

- Unplug the two small cords connected to the wifi card.

Step 6



- Using a Phillips #1 Screwdriver unscrew the 2 mm screw holding the wifi card in place.

Step 7



- Unplug the Wi-Fi card from the motherboard and remove it from the device.

To reassemble your device, follow these instructions in reverse order.