



Corsair Void Pro RGB Speakers Replacement

Replacing the speakers is a difficult task. It...

Written By: Gianna Nobili



INTRODUCTION

Replacing the speakers is a difficult task. It will required you to disassemble both sides of the headphones and require soldering skills. You will need to have a soldering kit to do this replacement. Replacing the speakers can be difficult without prior mechanical experience, so make sure you give yourself the necessary time to complete this replacement.

TOOLS:

[iFixit Opening Tool](#) (1)
[Phillips #0 Screwdriver](#) (1)
[T5 Torx Screwdriver](#) (1)
[Soldering Iron 60w Hakko 503F](#) (1)
[Desoldering Pump](#) (1)
[Lead-Free Solder](#) (1)

PARTS:

[50 mm Speaker](#) (1)

Step 1 — Earcup



- Carefully remove earmuff from headphones by getting a grip under the earmuff cushion and peeling up over the lip that keeps it in place.


Step 2



- Using the Phillips #0 screwdriver, unscrew the seven 6.4 mm screws holding the black speaker cover in place.

ⓘ If you are disassembling the lefthand earmuff, there will be eight 6.4 mm screws to remove.


Step 3

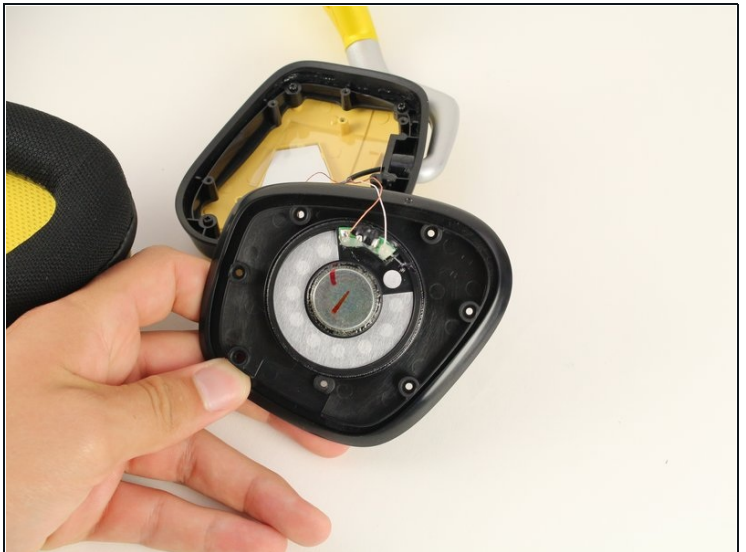

- Remove and set aside the black panel, taking care to keep the wires attached.

ⓘ The panel should lift up without much force. If the panel does not budge, carefully use the iFixit plastic opening tool to dislodge the piece.

Step 4 — Speakers

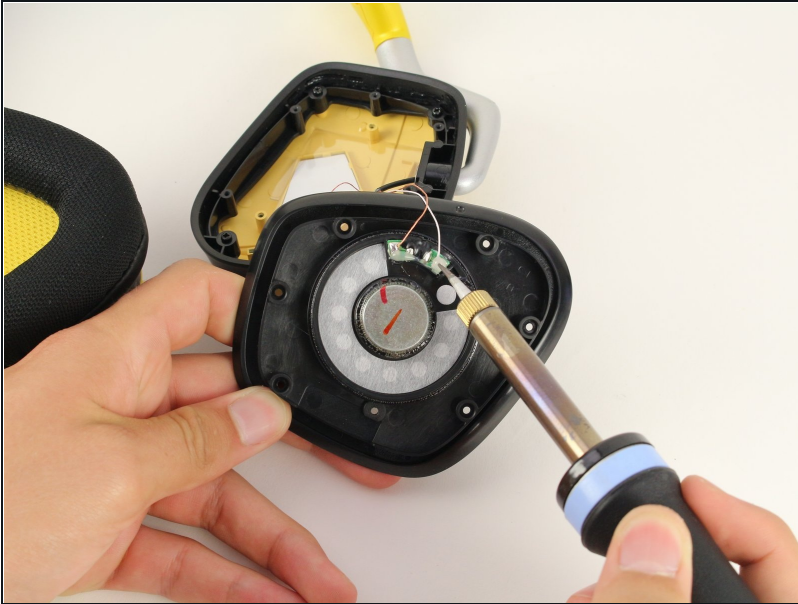

- Desolder the wire that connects to the speaker.
- ① For steps on how to solder, see this helpful [guide](#).

Step 5



- Use a knife tool as a wedge to remove the speaker and glue in the new speaker.

To reassemble your device, follow these instructions in reverse order.