



Canon PowerShot SX60 HS Front Panel Replacement

This guide will teach you how to remove the front panel from the Canon PowerShot SX60 HS.

Written By: Ethan Boone



INTRODUCTION

To complete many of the repairs on your Canon PowerShot SX60 HS it is necessary to remove the front panel. This guide will walk you through the necessary steps to remove the front panel.

The front panel is designed to protect the more sensitive and electronic components of the device from some elements and minor damage.

Before beginning this guide, ensure that your device is powered off completely.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Nylon Tipped Tweezers](#) (1)
 - [Spudger](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Panel




- Make sure to power off the device before completing any more steps.
- Remove the battery by releasing the orange clip in the battery compartment.

Step 2



- Remove the rubber eye piece by pulling it back.
- Use the Phillips #00 screwdriver to remove the two 5mm #00 screws located on the side of the viewfinder.

Step 3

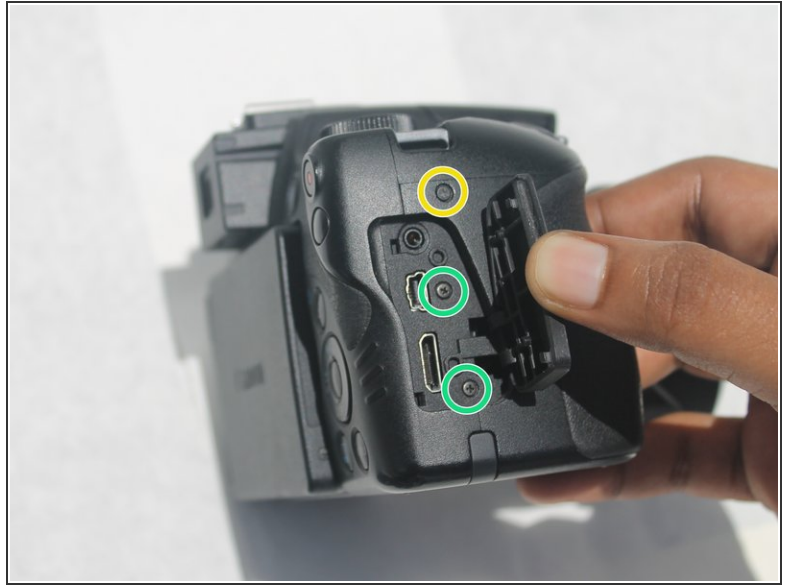

- Use the Phillips #00 screwdriver to remove the 4mm #00 screw located on the bottom left of the device.
- Use the Phillips #00 screwdriver to remove the 5mm #00 screw located on the bottom center of the device.
- Use the Phillips #00 screwdriver to remove the 7mm #00 screw on the right top corner of the camera, just above the media ports.
- Use the Phillips #00 screwdriver to remove the two 5mm #00 screws located on the right side, under the media port dust cover.

Step 4



- ⓘ Ensure the LCD screen is swung fully to the left before taking off the back panel.
 - Use the iFixit opening tool to pry off the back panel.
- ⓘ Don't completely pull off the back panel because there is still a ribbon attached.
 - Use the black spudger to unclip the ribbon located behind the battery compartment. Then remove it using the nylon tipped tweezers.
 - Once the ribbon is unplugged, remove the back panel from the camera body.

Step 5 — Front Panel



- Remove the sunshade located on the front of the lens by twisting it 90 degrees in either direction, then pull straight off the lens.

Step 6



- Remove the 5mm Phillips #00 screw located on the left side below the microphone connection.
- Remove the 4mm Phillips #00 screw located on the bottom left of the camera.
- Remove the 5mm Phillips #00 screw located on the bottom center of the camera.
- Pop open the flash and remove the 5mm Phillips #00 screw located under the flash.

Step 7



- Remove the front cover by pulling along the lens housing while holding the body of the camera.

To reassemble your device, follow these instructions in reverse order.