




# Toshiba Satellite C55D-A5108 Heat Sink Replacement

A quick guide on how to replace a faulty heat...

Written By: Ryan Smith

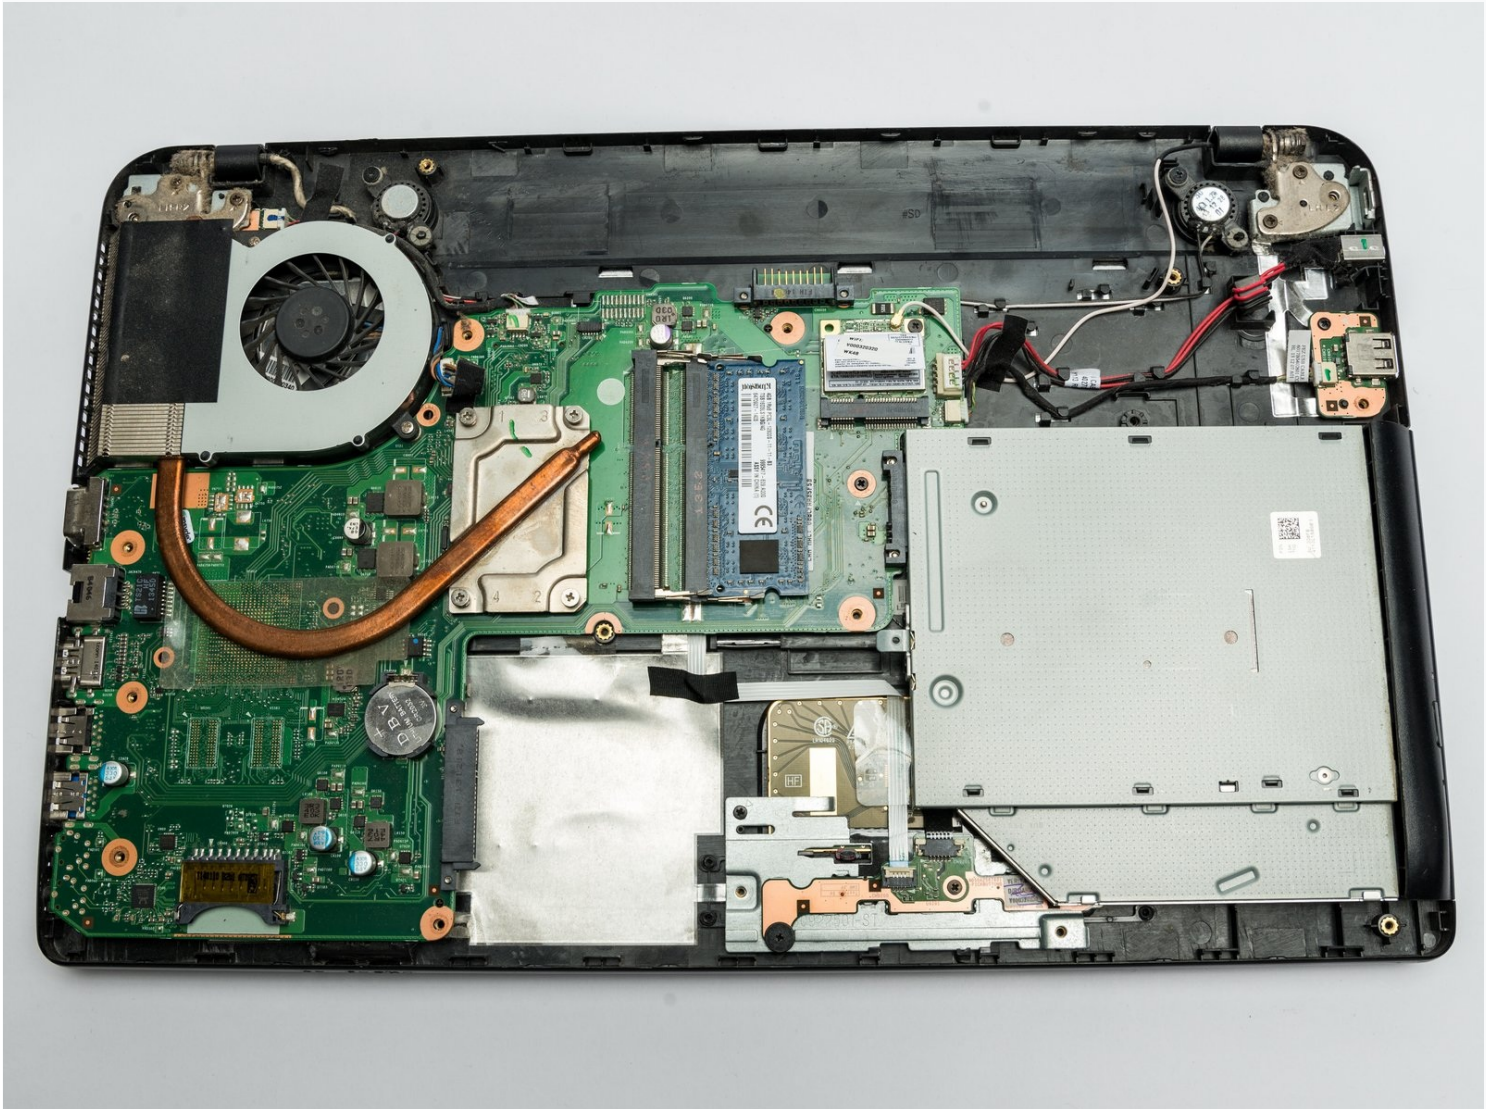

# INTRODUCTION

A quick guide on how to replace a faulty heat sink in a Toshiba Satellite C55D-A5108.

Follow [this guide](#) to reapply thermal paste.



## TOOLS:

[Arctic Silver ArctiClean](#) (1)  
[Arctic Silver Thermal Paste](#) (1)  
[Coffee Filters or a lint-free cloth](#) (1)  
[Phillips #0 Screwdriver](#) (1)  
[Spudger](#) (1)



## PARTS:

[Toshiba Satellite C55D-A1508 Heat Sink](#)  
(1)


---

## Step 1 — Battery



- Flip over the device so that the model stickers are facing up.

## Step 2

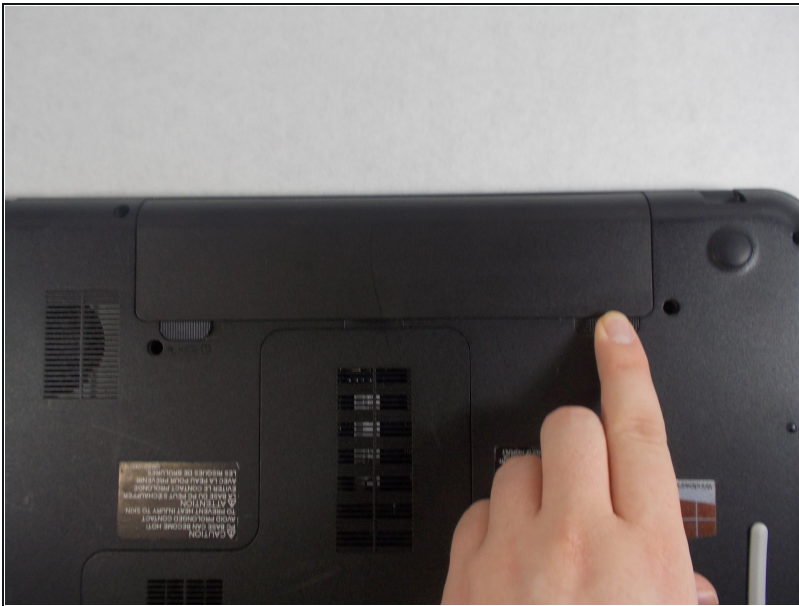

- Move the right notch to the unlock position by sliding it to the right.

## Step 3



- Hold the left notch in an unlocked position with one hand and use the other hand to slide the battery out.



## Step 4 — Hard Drive



- Remove the Phillips #0 screw from the memory cover.

## Step 5




- Grasp the side of the hard drive opposite the circular battery, and carefully pull out the drive by moving it away from the circular battery.

## Step 6 — Back Cover



- Remove the 16 screws holding the back cover with a Phillips #0 screwdriver.
- Pry the cover off with an opening tool.
- Gently remove the cover with your hands and place to the side.

## Step 7 — Heat Sink

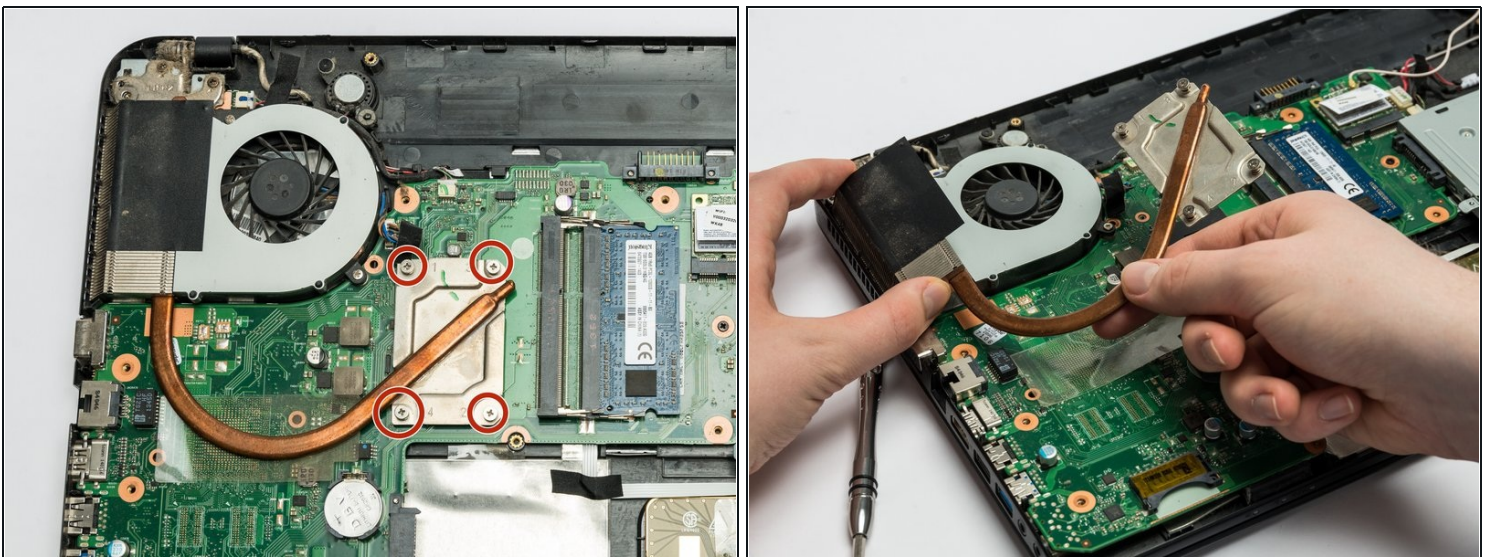

- Remove the four Phillips #0 screws from each corner of the heat sink.
- Gently lift the heat sink out of the computer.

---

To reassemble your device, follow these instructions in reverse order.