



Skateboard Hanger Replacement

This guide is to help all the new skaters out there replace the hanger on their skateboards if they are ever damaged or broken.

Written By: Mark Stieber



INTRODUCTION

Is your skateboard veering off in the wrong direction or are you not going in a straight path? Then it's time to replace the hanger of your skateboard. This guide will teach you how to disassemble & replace a skateboard hanger if it's damaged or broken.

TOOLS:

- [Skate Tool](#) (1)
-

Step 1 — Hanger




- Using the T-tool, unscrew the nut securing the wheel and remove it, setting it and the wheel aside.

Step 2



- Using the T-Tool, unscrew the Kingpin nut, washer and top bushing so that the hanger itself can be taken off.

Step 3

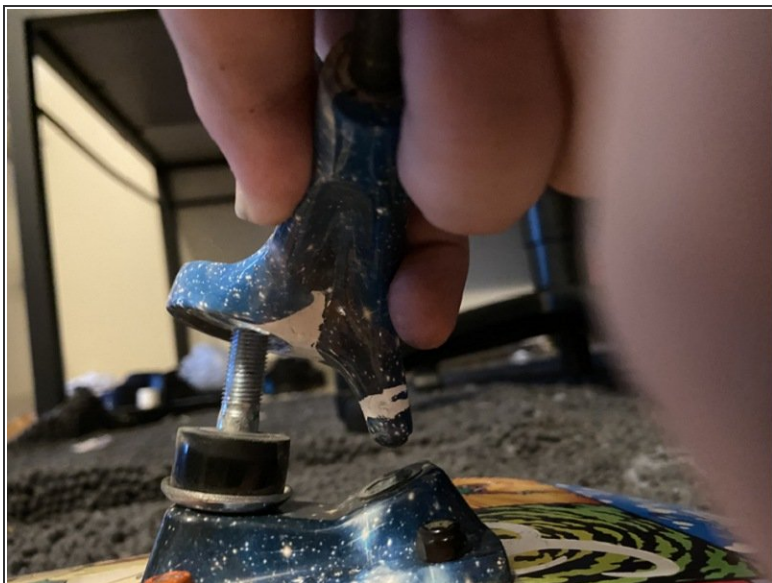

- Pull straight up to remove the hanger. Remove the lower bushing and the lower cup washer just to check on the riser.

Step 4




- To reassemble, take the lower cup washer, then the lower bushing and put it on the kingpin. Next, set the replacement hanger on top of the lower bushing.

Step 5



- After the hanger is added, put the the top bushing, the top cup washer and then the Kingpin nut back.

Step 6

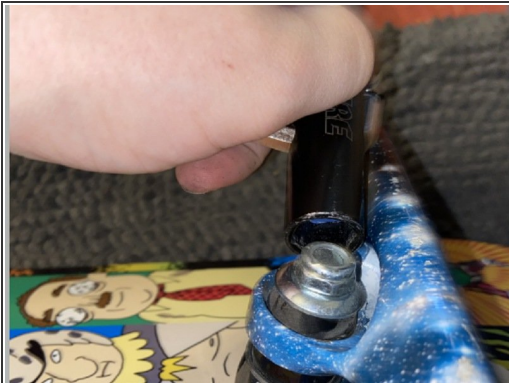

- After the kingpin nut is secured, take your T-Tool and add the wheels back onto and secure them in place.

To reassemble your device, follow these instructions in reverse order.