




Lenovo Yoga 900-13ISK Trackpad Replacement

This guide will show you how to replace the...

Written By: Austin Blakely

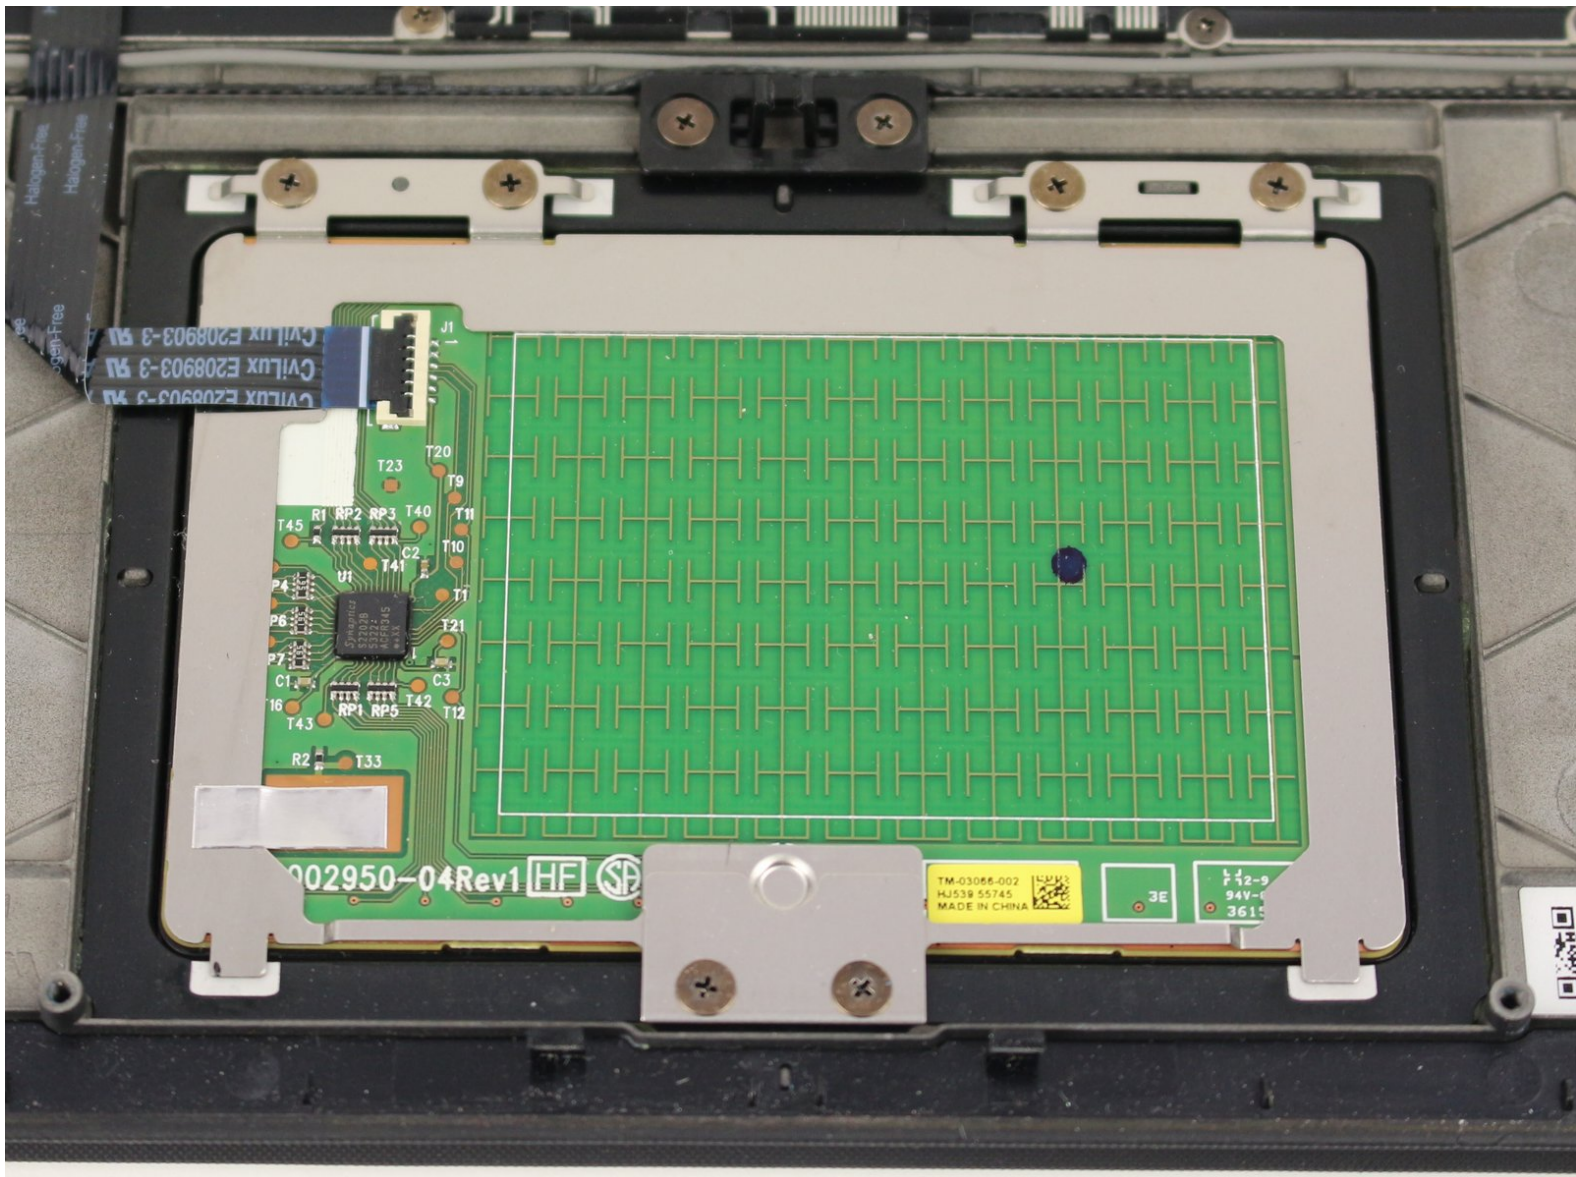

INTRODUCTION

This guide will show you how to replace the trackpad in your 13 inch Lenovo Yoga 900 (900-13ISK). The trackpad acts as the mouse, allowing the user to move the cursor around the screen and click to interact with the interface on their computer. Common symptoms indicating your trackpad is malfunctioning are a failure to register clicks, trackpad drift, or registering multiple clicks for just one click. If the cursor doesn't respond to movement on the trackpad **and** clicks are not registering, you should check that your trackpad is not disabled in the computer's settings before performing a replacement.


Be sure to unplug and completely turn off your device before you start working.



TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Cover

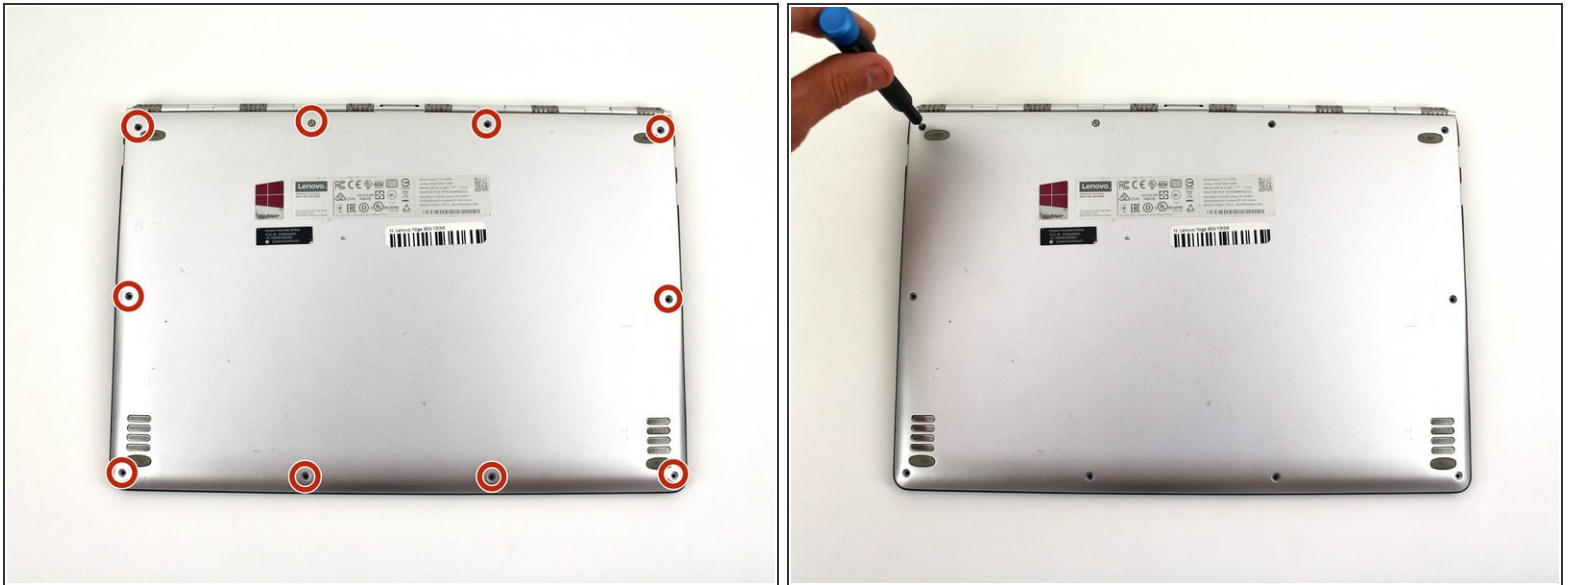

- Using a T5 Torx screwdriver, remove the ten 5.5 mm screws from the back case of the laptop.

Step 2



- Use a spudger to pry open the back case at the hinges of the laptop.
 - ❗ There are plastic clips around the perimeter of the case holding down the back cover. These will need to be popped off as the cover is removed.
- Use your fingers to completely pop off the back cover.

Step 3 — Battery



- Remove the five 3.6 mm screws from the battery with a Phillips #00 screwdriver.


Step 4



- Grab the bottom corners of the battery and gently pull the battery until the cable disconnects from the connector on the motherboard.


- ☑ While reassembling, use a plastic spudger to push the battery cable into the connector on the underside of the motherboard. This will be easier to do before the screws are replaced.

Step 5 — Trackpad

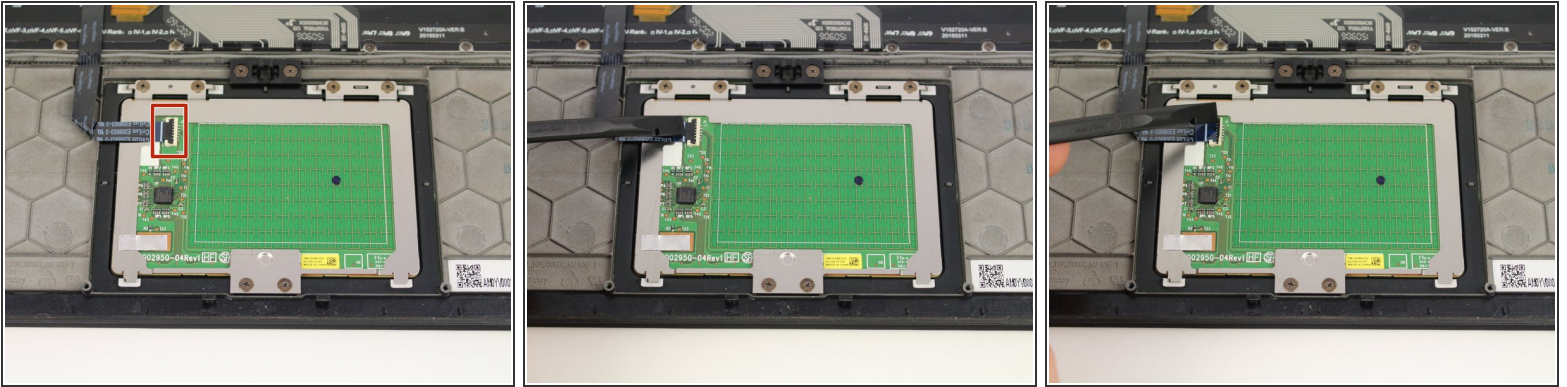




- Use a spudger to lift the hinged black tab of the [ZIF connector](#) on the trackpad.

Step 6

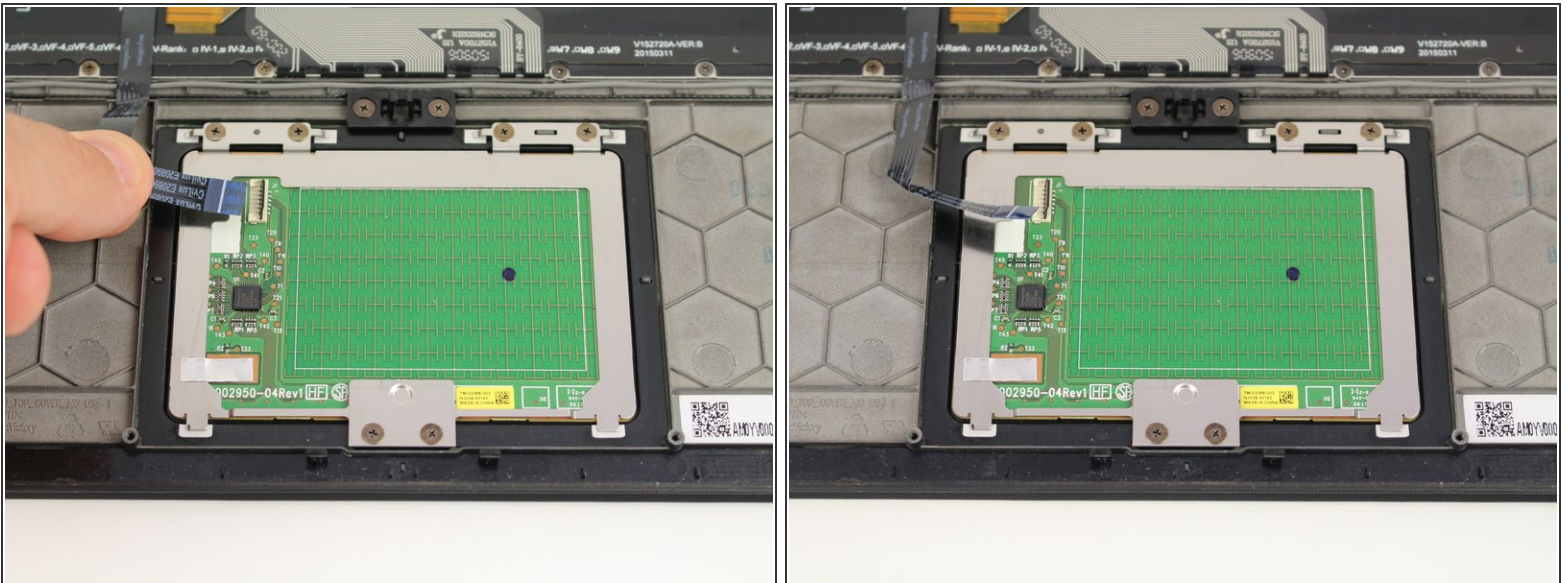




- Pull the cable out from the connector with your fingers.

Step 7

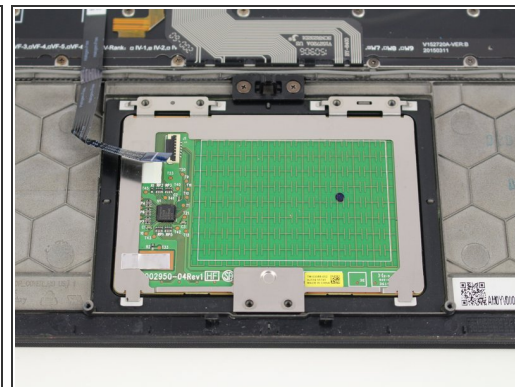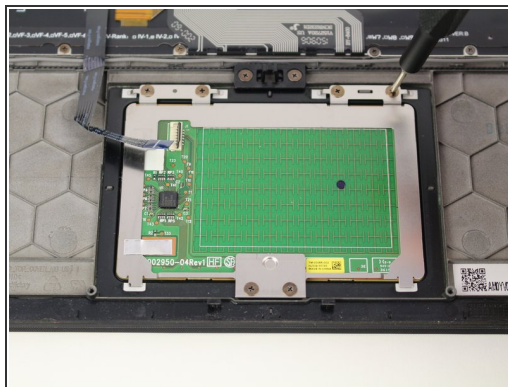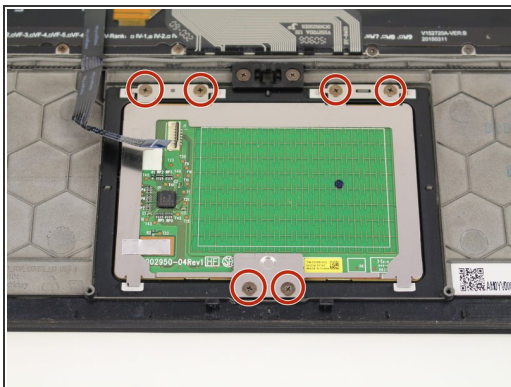

- Remove the six 2.2 mm screws from the trackpad with a Phillips #00 screwdriver.

Step 8

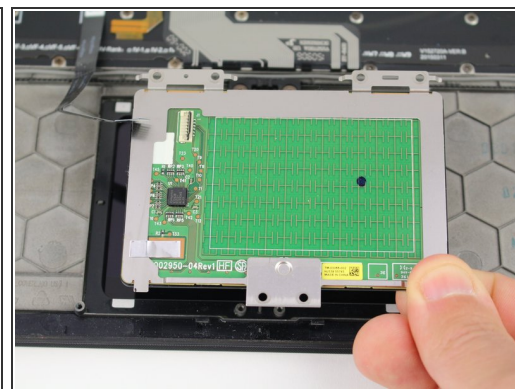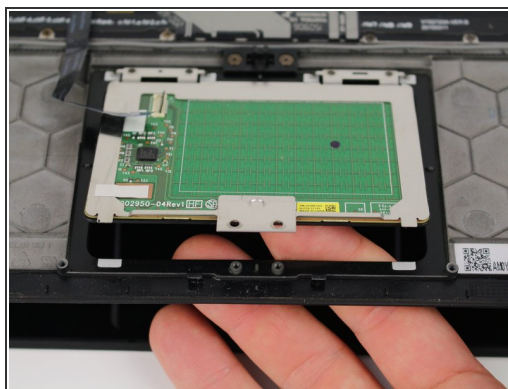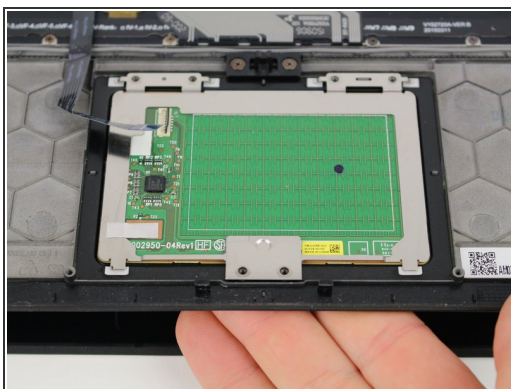

- Press the trackpad up from the bottom by opening the laptop slightly and applying pressure from the keyboard side.
- Remove the trackpad.

To reassemble your device, follow these instructions in reverse order.