



REV-A NES Cartridge Teardown

Written By: Ethan Rempel



TOOLS:

3.8mm Gamebit (1)

Step 1 — REV-A NES Cartridge Teardown




- Flip the cartridge face-down on your table.

Step 2



- Use a 3.8 mm gamebit screwdriver to undo the 3 screws on the rear of the cartridge, and set them aside.

Step 3

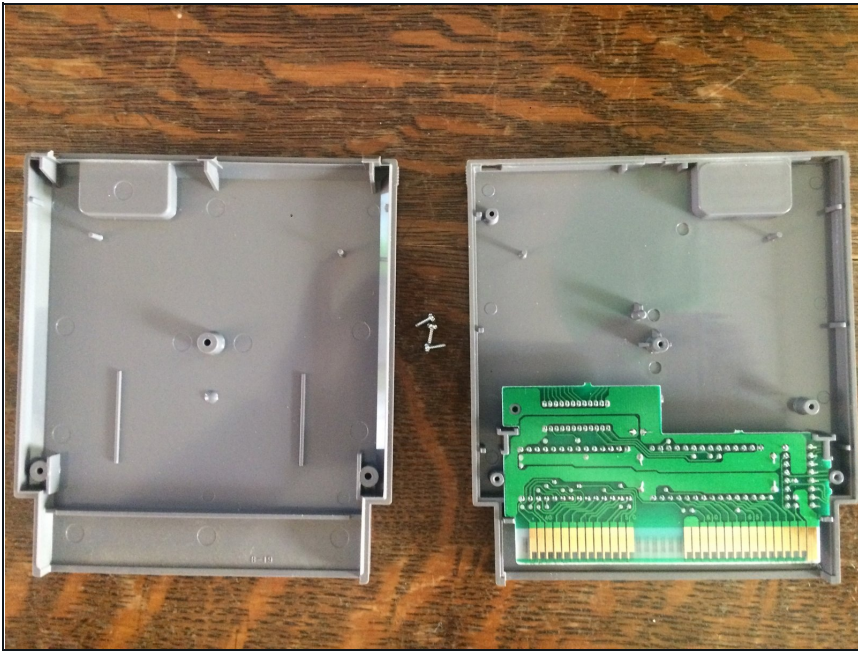

- Gently lift up the half of the cartridge facing up, and set it aside.

Step 4



- Gently lift out the PCB, and clean the pins with isopropyl alcohol and a cotton swab. if the pins still remain dirty, carefully sand the pins with a very fine-grit sandpaper.