



# UTStarcom XV6700 Camera Replacement

A small amount of disassembly is required to...

Written By: Jesse Walker



# INTRODUCTION

A small amount of disassembly is required to replace the camera. The beginner can complete this task with just a couple tools.

---

## TOOLS:

Phillips #00 Screwdriver (1)

Spudger (1)

Tweezers (1)

---

## Step 1 — Battery



- Press the on/off button on the top to power the phone off.

## Step 2



- Remove the battery cover by pressing and sliding the cover down and off of the phone.

## Step 3



- Pull the battery removal tab and lift the battery out of the phone.
- ⓘ If the battery removal tab is missing, place a spudger on the opposite side of the highlighted connector and pry the battery up.




## Step 4 — Camera



- Remove the two 4.0-mm #000 Phillips screws at the top of the battery compartment. [Tweezers](#) may be useful to remove the screws.

## Step 5

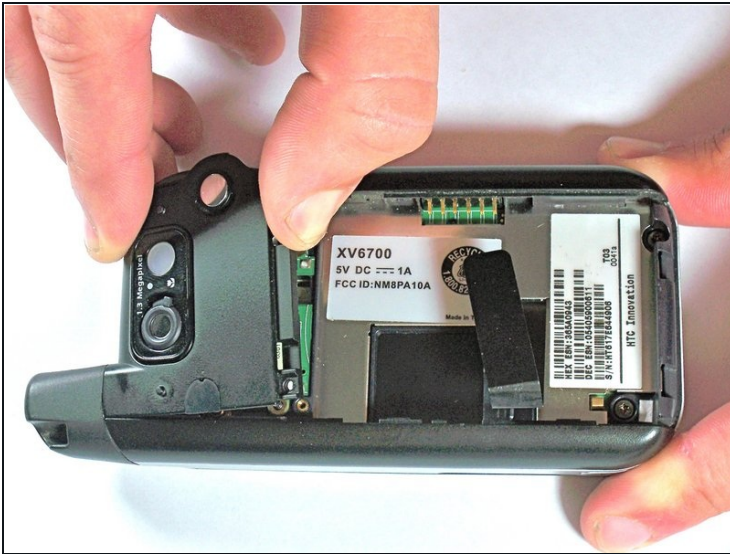


- Use firm pressure to carefully pry off the cover with your fingers.

## Step 6




- Remove the 4.0-mm #00 Phillips screw securing the camera flash circuit board. The board is still connected by a connector on the bottom of the board.

## Step 7

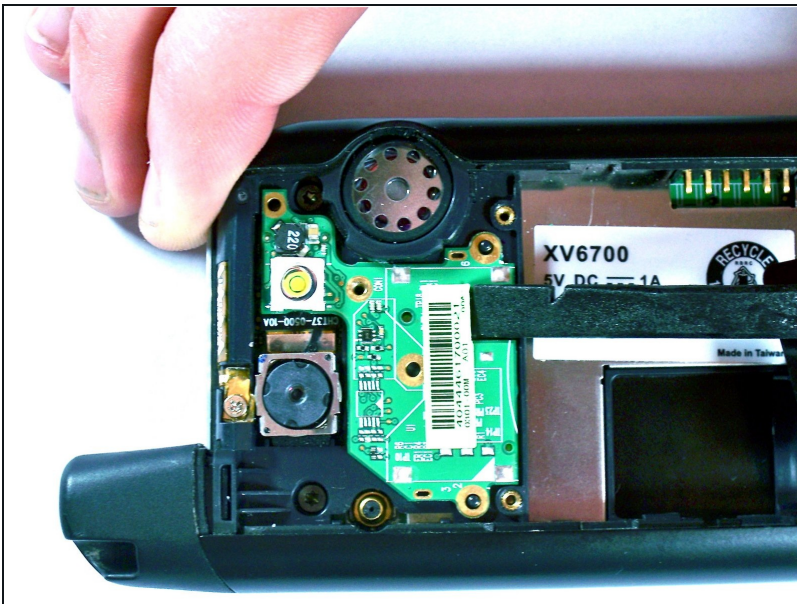

- Gently pry off the camera flash circuit board with the spudger.

## Step 8

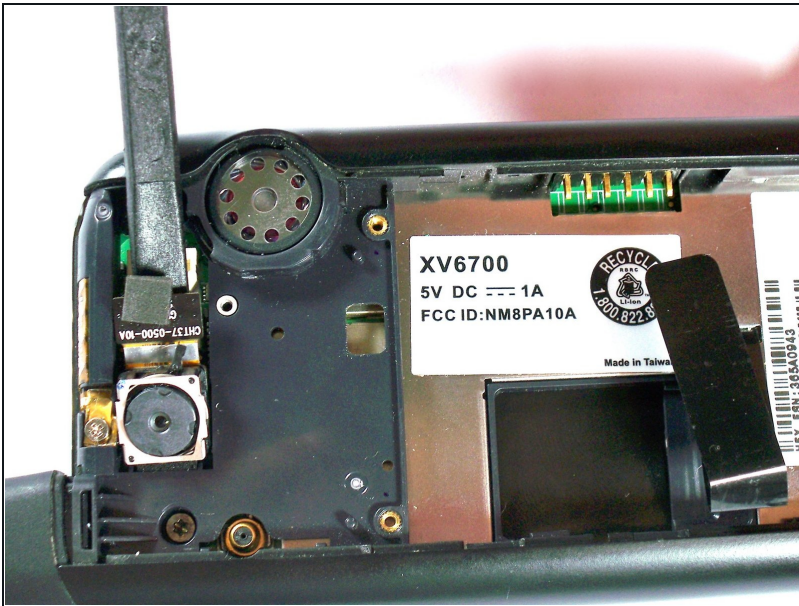

- Gently pry off the camera with the spudger.

---

To reassemble your device, follow these instructions in reverse order.