



LG VX6000 Body Replacement

This guide is for dismantling the body of the...

Written By: Barrett Wallace



INTRODUCTION

This guide is for dismantling the body of the LG VX6000, a step that is required for many other repairs

TOOLS:

Phillips #1 Screwdriver (1)

Tweezers (1)

Step 1 — Battery



- Locate the dark gray tab on the back of the phone towards the top. Push the tab towards the top of the phone to release the battery.

Step 2



- ① Remove the battery by lifting up and rotating the battery away from the bottom edge.

Step 3 — Body




- Pull out the two rubber cushions located on the top of the phone using [tweezers](#).
- ① Only remove the two cushions that are circled!

Step 4



- Unscrew the six screws seen on the back using a Phillips 00 Screwdriver.
- Remove screws and carefully place on an uncluttered surface or in a small container.

Step 5

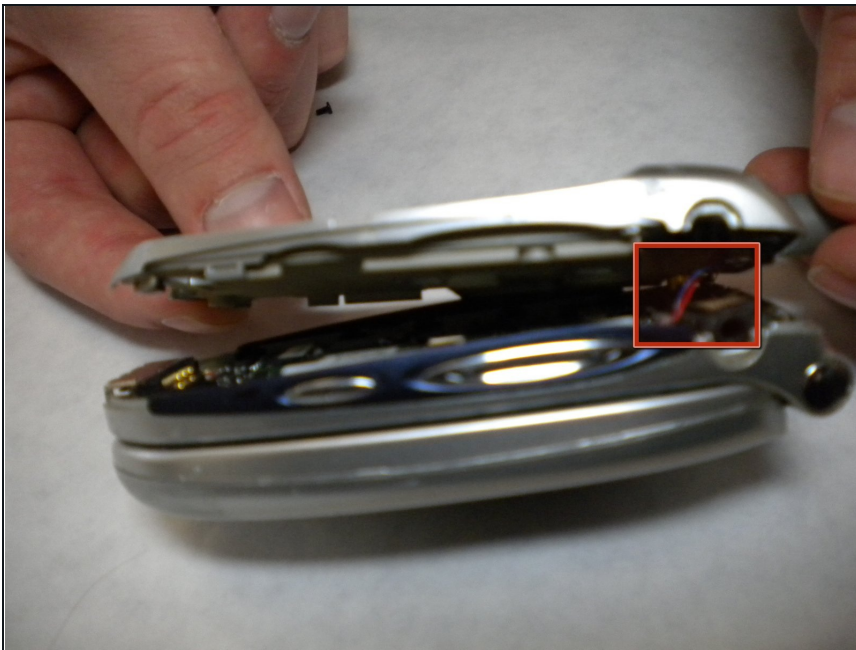

- Carefully remove the back of the phone gently using your fingernails or tweezers.
- ⚠ There are a pair of red and blue wires that plugs into the motherboard. These wires will snap if you force the pieces apart.
- ☑ To reattach the back, you must plug these wires back in.