



GP Percussion DP778TN Double Bass Pedal Assembly Technique

Assemble and install GP Percussion's double bass pedal into a drumkit.

Written By: James Pearson Hughes





TOOLS:

- [Allen Wrench 7/32"](#) (1)
-

Step 1 — GP Percussion DP778TN Double Bass Pedal Assembly Technique



- Lay everything out

Step 2



- Remove the drum key and Allen wrenches from the right side of the primary pedal.

Step 3




- Slide the ends of the long black connector onto the sides of the pedals.
- Both sides of the connection are shaped like a half-circle, so they can only connect in the proper orientation.
- Ensure all the screws on the connector are pointing up. To do so, you will need to "wind" the secondary pedal up manually before attaching the connector.

Step 4



- Insert the beaters into the primary pedal.
- You can choose to use either side of the beaters - just be consistent!

Step 5

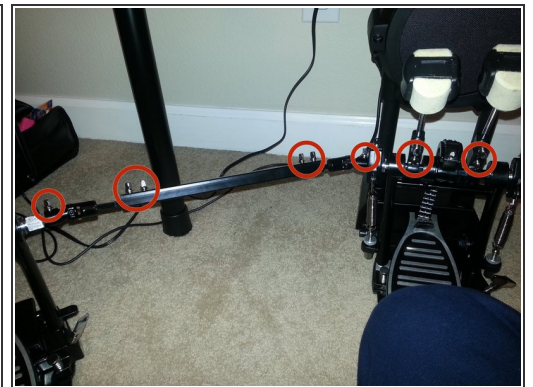

- Arrange the pedals in the drumkit. The primary pedal should be centered on the kick drum, while the secondary pedal should be wherever comfortable.
- If necessary use the drum key to adjust the height of the beaters to be vertically centered on the kick drum.
- Now tighten everything down!

Step 6



- Tighten and loosen the nuts on the bottom of the springs until both pedals have an even, comfortable tension.

Step 7



- Replace the tools in the pedal for safe-keeping.
- Bag the extra parts in case you want to convert your double-bass pedal into two singles.

Step 8



- Pound out some sick beats!