




# LG VX5400 Logic Board Replacement

Written By: Sourabh

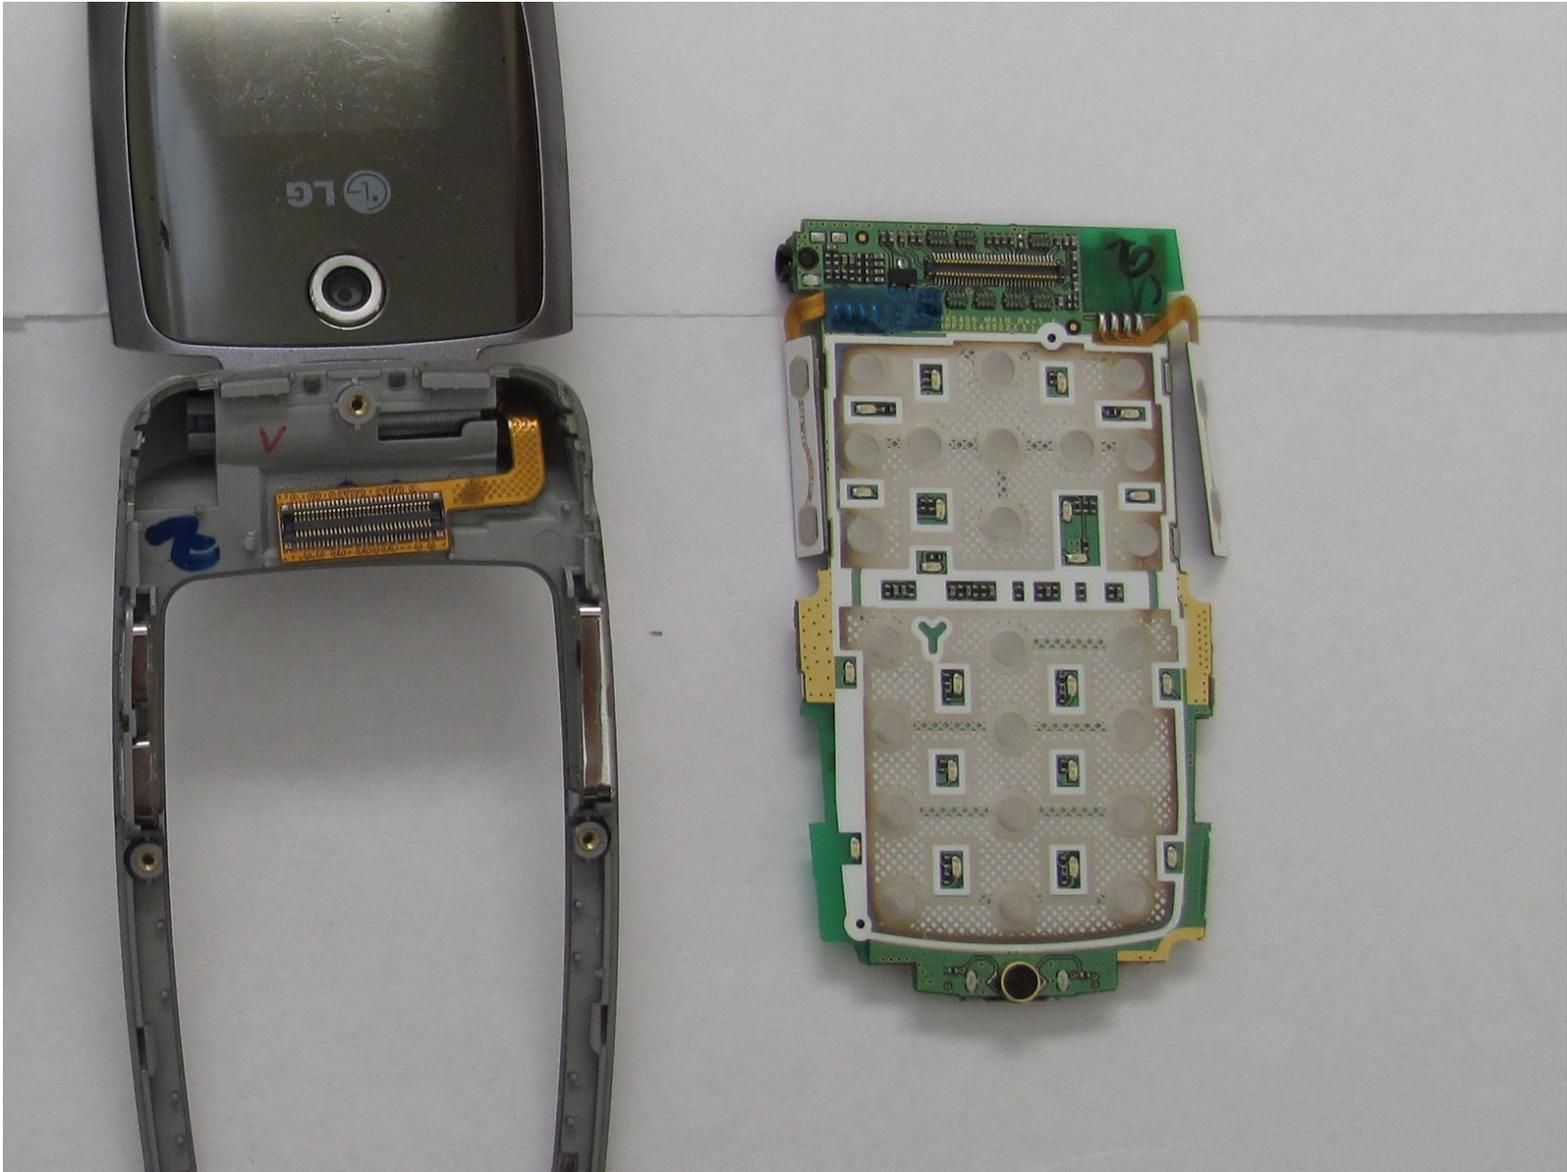

---

## INTRODUCTION

A guide on how to replace the logic board in the LG VX5400.

---

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Battery



- Turn off the cell phone and turn it over on its back side

## Step 2



- Hold the phone case in your palm and slide the back cover towards yourself using your thumb

### Step 3



- Slide a tool or finger into the notch at the top of the battery to carefully remove it.

### Step 4 — Outer Casing




- Take the Philips screwdriver and unscrew the four visible screws on the backside of the phone indicated by the four red circles.

## Step 5




- Then, take the pointed end of a spudger and pry out the rubber stopper to reveal the last screw at the top indicated with the blue circle.

## Step 6 — Logic Board

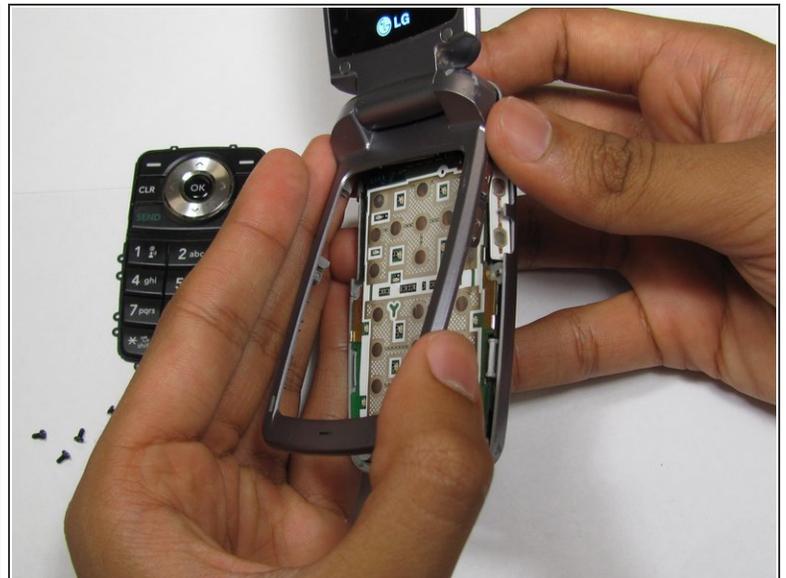

- While the phone is open and faced up, carefully insert a tool into the middle to separate the bottom half of the phone.

## Step 7

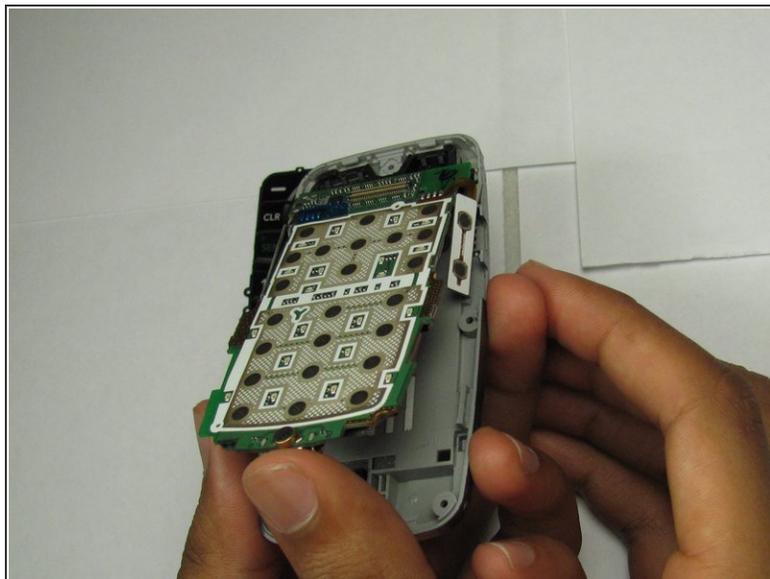

- Carefully slide out the keypad and remove the logic board. Then insert new the logic board.

To reassemble your device, follow these instructions in reverse order.