



Motorola V60i Back Plate Replacement

Step-by-step guide to removing your Motorola V60i phone's back plate.

Written By: Elizabeth OBrien



INTRODUCTION

This guide will cover the steps on how to remove the back plate of a Motorola V60i.



TOOLS:

- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery




- Flip the phone over so the back cover is facing up.
- Using either a finger or a spudger, press the button located near the top of the phone by the antenna.

Step 2



- Pry up the back plate from the phone.
- Push the button near the bottom of the battery using either your finger or the spudger to release the battery.

Step 3 — Back Plate

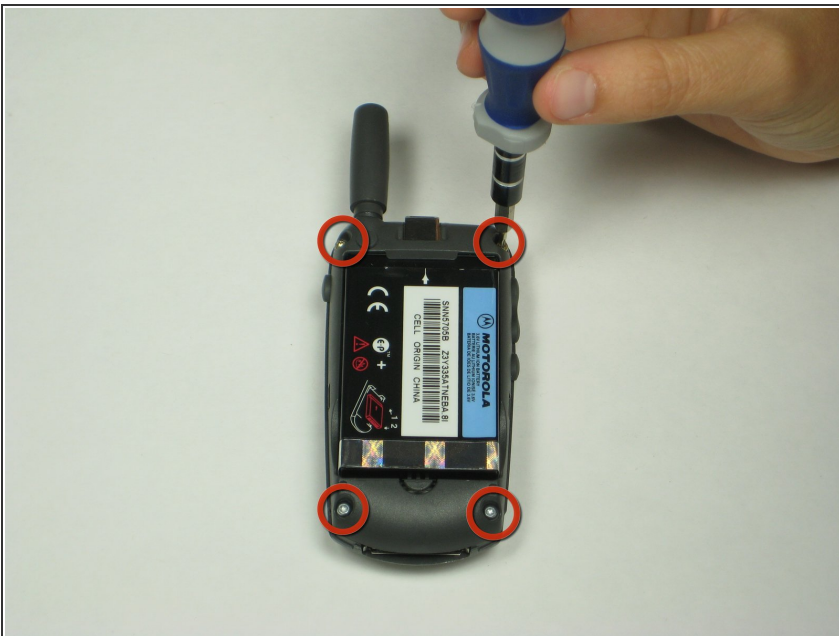


- Using a T6 Torx screwdriver, remove the four screws from the back of the phone.

Step 4



- Simultaneously press the highlighted buttons on both sides of phone.

Step 5

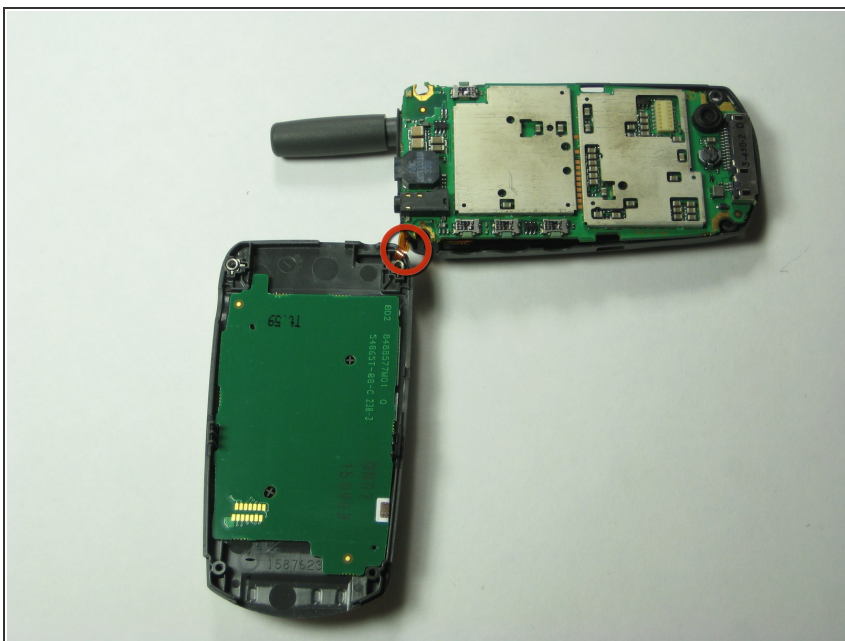

- Separate the back plate from the rest of phone.
- ⚠ Do not pull the wire connecting the front and back plates.

To reassemble your device, follow these instructions in reverse order.