




Motorola i850 LCD Screen Replacement

Written By: Andrew Aw

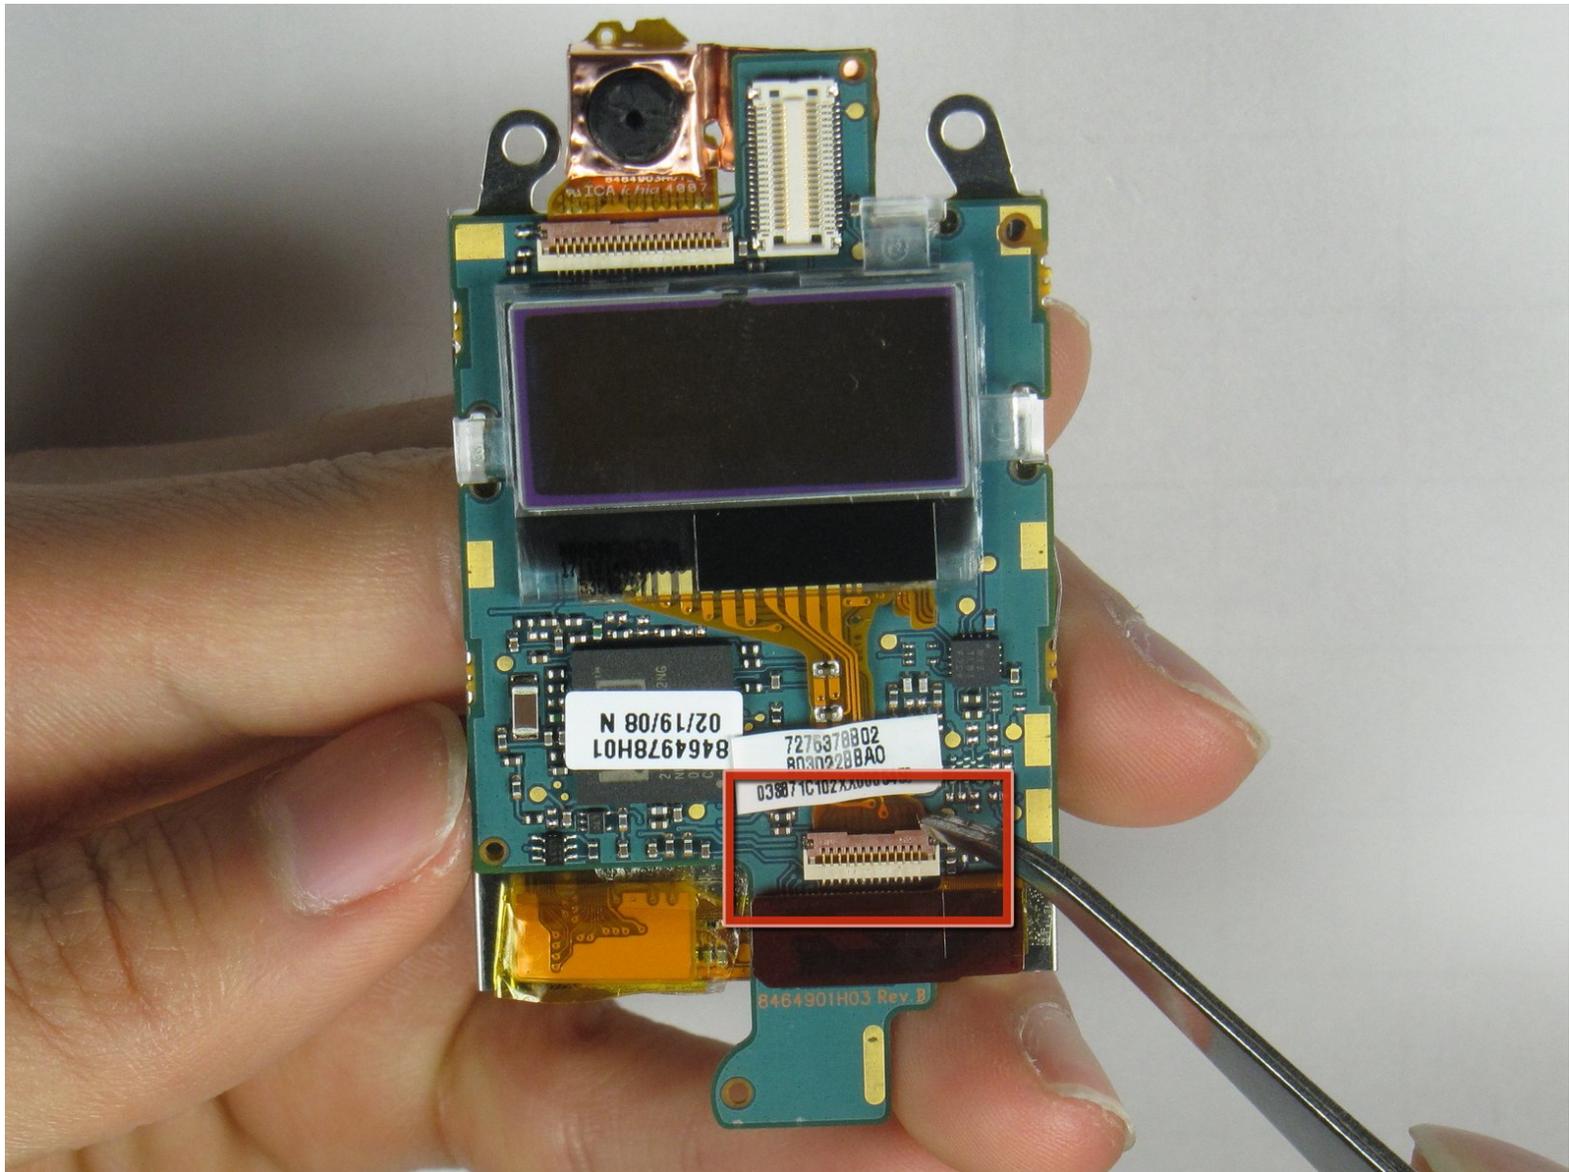

INTRODUCTION

Replacement of malfunctioning LCD screen.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Razor Blade](#) (1)
 - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — LCD Board



- Open the flip cover of the phone with the LCD screen facing towards you.

Step 2



- Use a Razor Blade to remove the screw covers.

⚠ Razor Blade is very sharp. Use caution.

Step 3



- Unscrew the screws using a Phillips #00 Screwdriver.

Step 4



- Insert a Spudger into the side crack of the flip cover and slowly separate the phone cover from the case.

Step 5



- Gently separate the flip cover case from the phone with your hands when the crack is wide enough.

Step 6




- Partially close the flip cover of the phone in order to take off the outer case.

Step 7




- Completely remove the outer casing from the phone.

Step 8

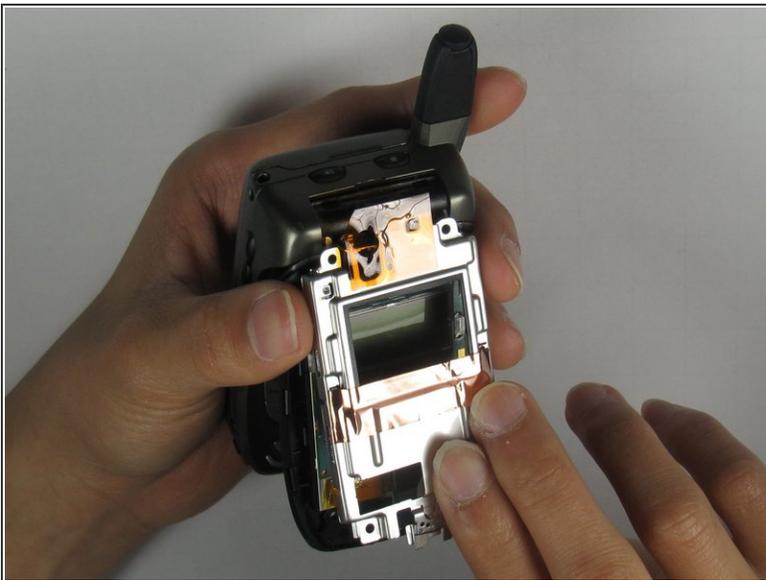

- Place your thumb underneath the protective metal covering to remove it from the phone.

Step 9

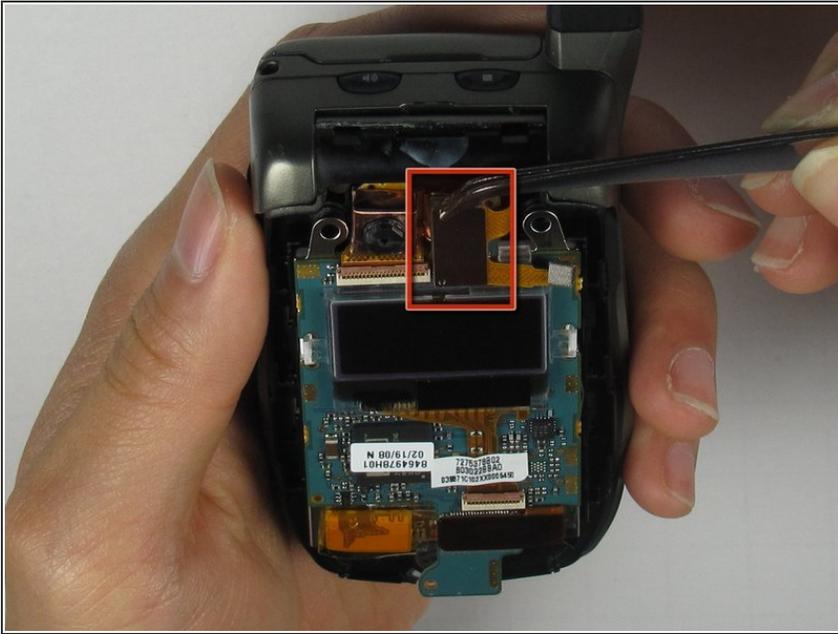


- Gently detach the black microchip from the phone with a Tweezer.

Step 10




- Prop out the LCD board from the phone using your fingertips.

Step 11

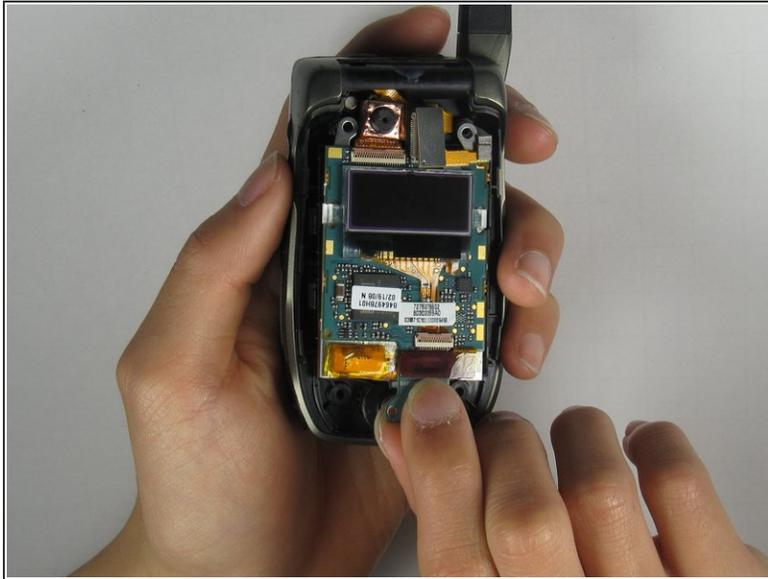


- Remove the LCD board from the phone by grabbing the bottom side of the LCD board.

Step 12 — LCD Screen

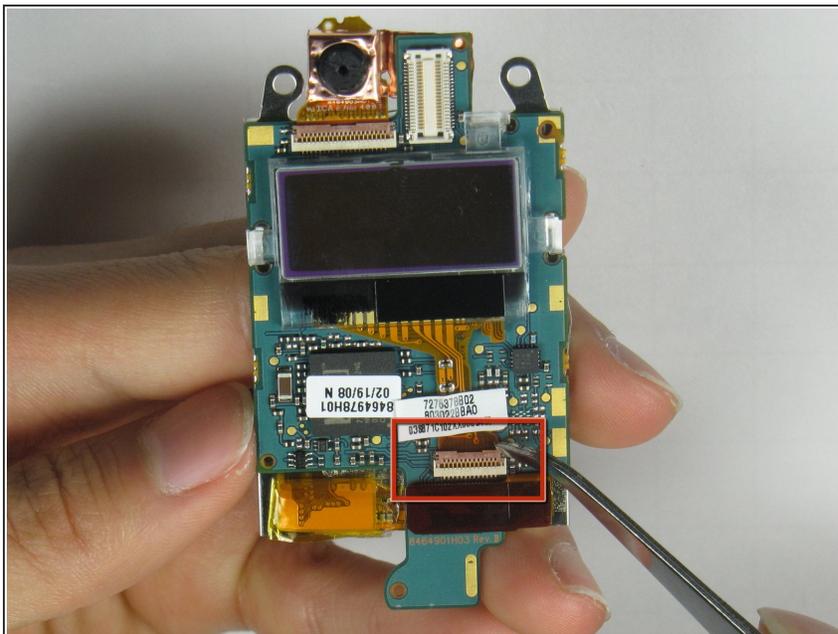




- Firmly detach the gold strip using a Tweezer.

Step 13

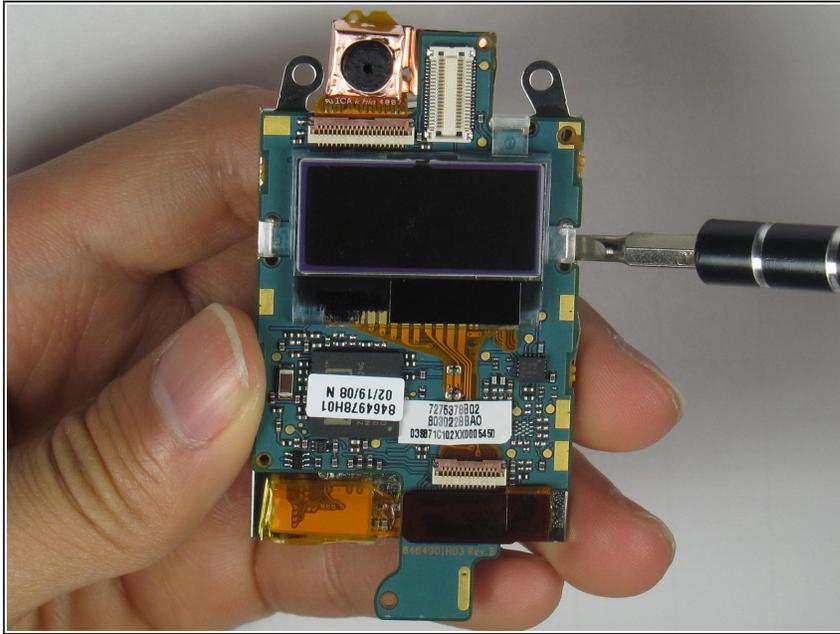

- Prop out the LCD screen using a Small Flathead Screwdriver.

Step 14

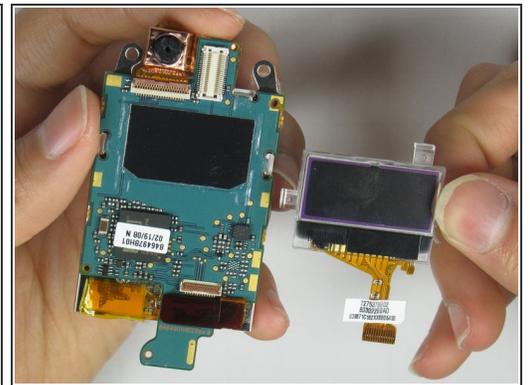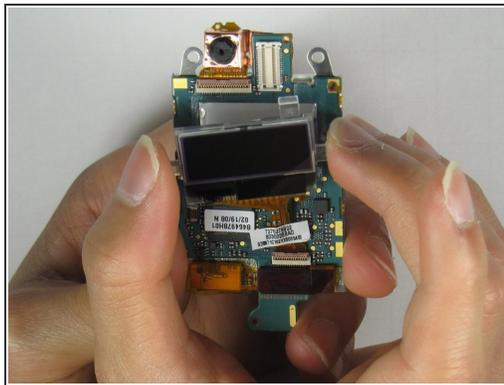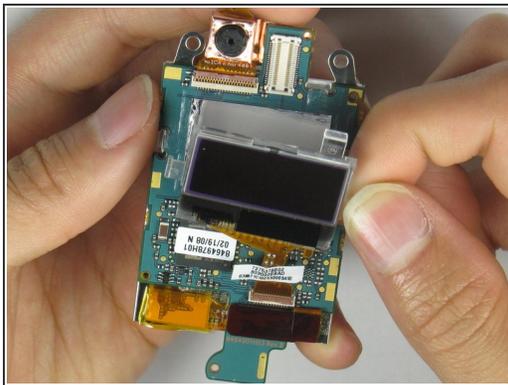

- Remove the LCD screen from the LCD board.

To reassemble your device, follow these instructions in reverse order.