




HTC Desire 700 Dual Sim Rear Panel Replacement

Remove the rear panel for replacement or to obtain access to other vital pieces.

Written By: Steven Pate

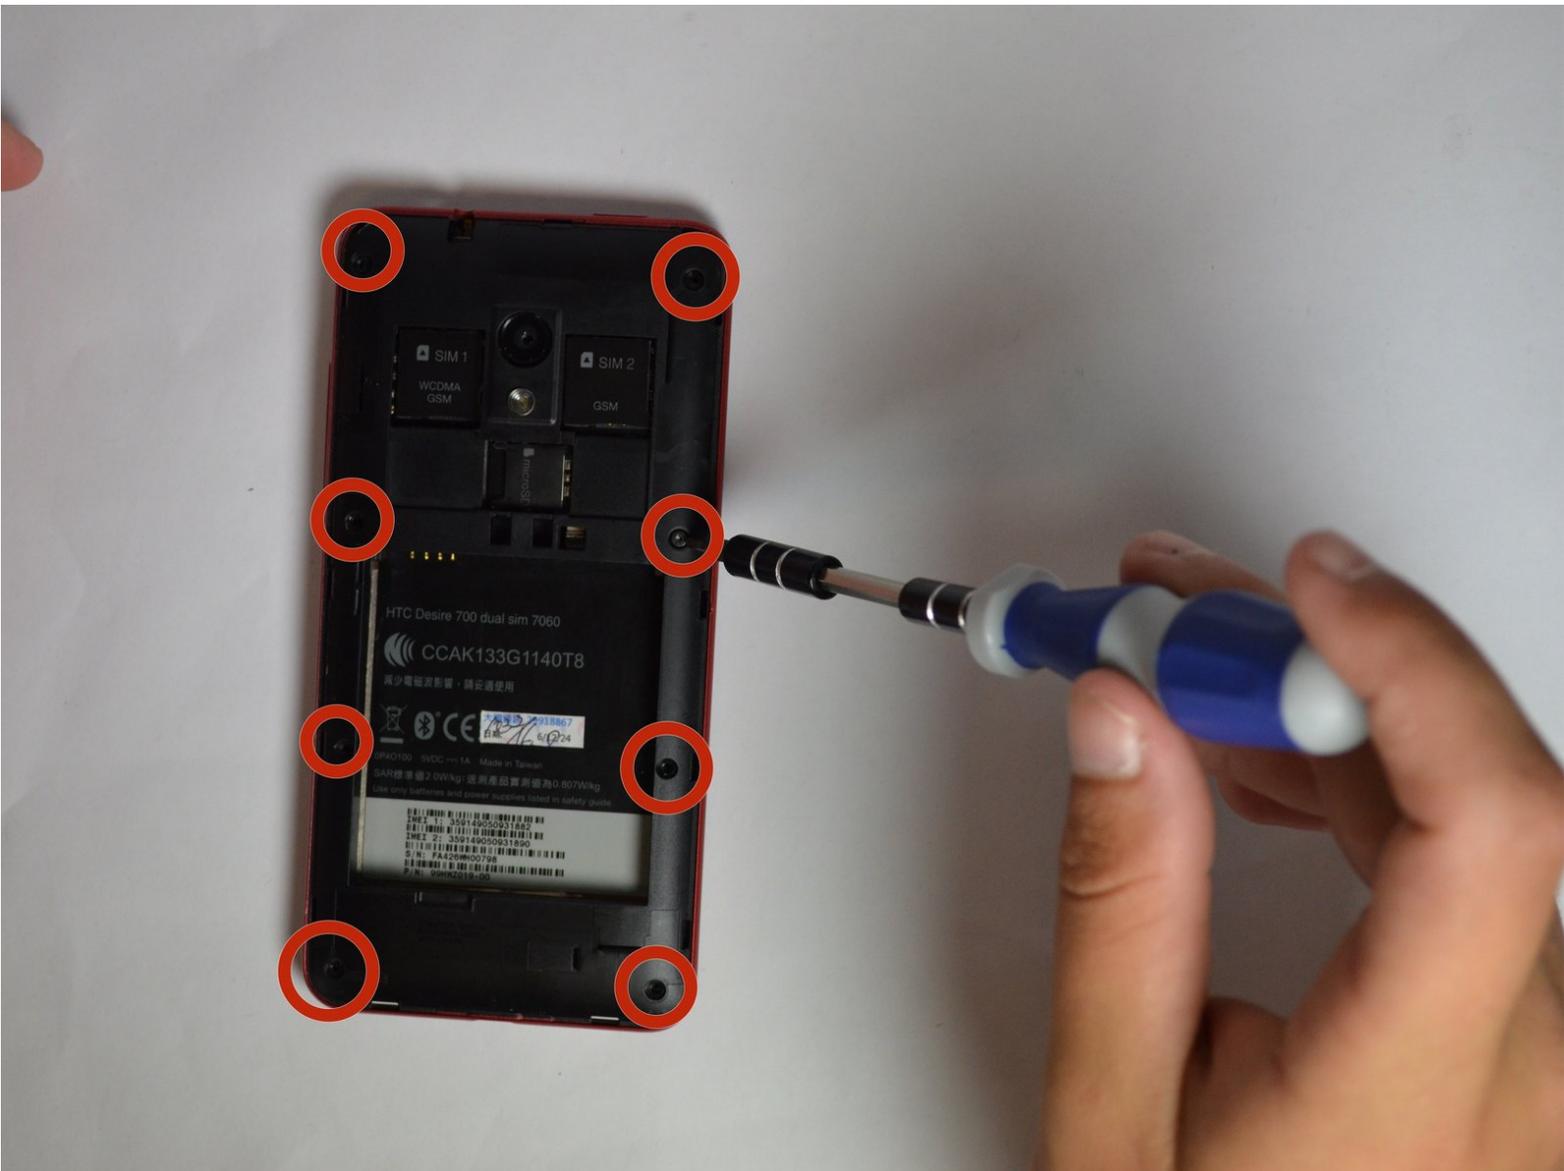

INTRODUCTION

The rear panel of the phone is responsible for keeping all of the device's hardware safe and secure. It is secured by eight 8.3 mm Torx head screws, and is accessible by first removing the back cover and battery. If the rear panel is damaged, it should be removed and replaced as a damaged panel can lead to damage of other internal hardware.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T4 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
-

Step 1 — Back Cover




- Use the spudger to pry the back cover off.

Step 2 — Removing Battery



- Use spudger tool to pry under the battery to lift it up and out.

Step 3 — Remove 8 Torx Screws

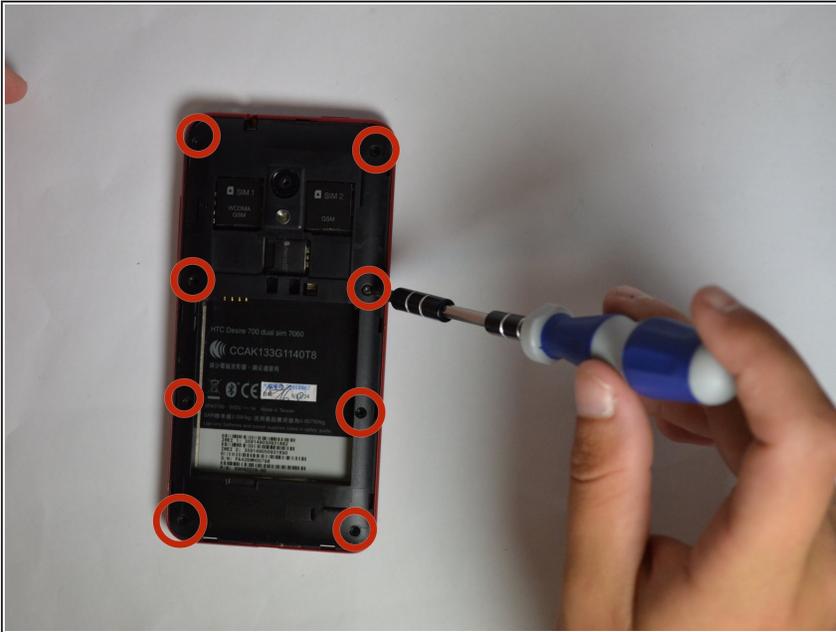

- Remove eight 8.3mm T4 screws with the Torx screwdriver.

Step 4 — Prying Off Rear Panel



- Pry the back panel of the screen using the plastic opener.
 - Work your way gently around the device, using picks as necessary to keep the back panel separated.
- ⚠ Use caution not to damage the device, as it takes force to remove the rear panel.

To reassemble your device, follow these instructions in reverse order.