


Esteban Crystal Heart Strings Replacement

This guide will show a guitar novice how to properly install and remove all six strings in an acoustic guitar. In addition, this guide will also help introduce tuning the guitar.

Written By: Andrew Jayson Caberto

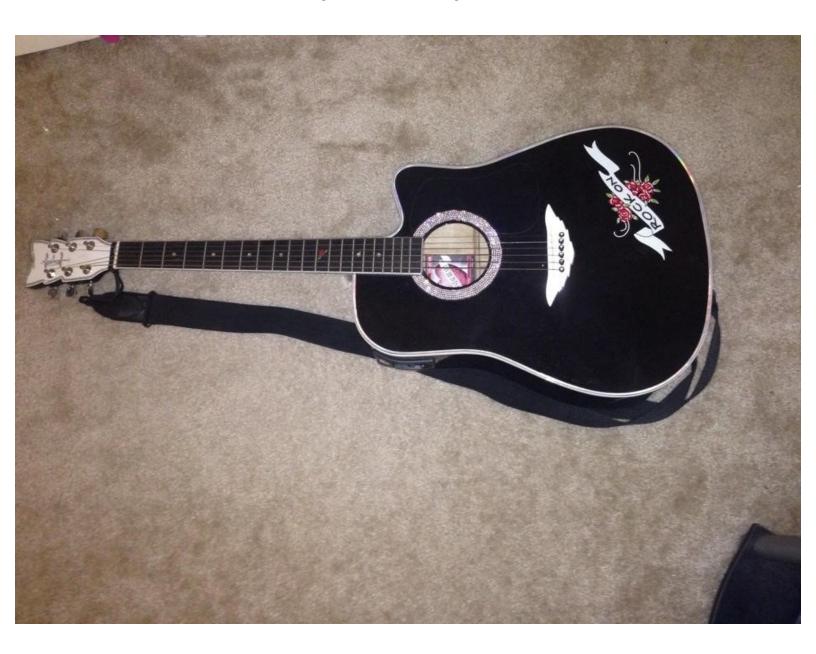

INTRODUCTION

Did one of your strings ripped? Are any of your strings starting to rust and needs replacing? Use this guide to replace your strings.

This guide will show a guitar novice how to properly install and remove all six strings in an acoustic guitar. In addition, this guide will also help introduce tuning the guitar by ear.



PARTS:

Elixir Light Nanoweb 80/20 Bronze Acoustic Guitar Strings (1)

Step 1 — Removing the damaged strings from the head







- On the head of the guitar, unroll the string from its tuning peg.
- Once the string is unrolled, remove the string by sliding it out of the small hole in its tuning peg.

Step 2 — Removing the string from the bridge








- Remove the peg from the bridge but pulling it out of its hole.
- Pull the string out of the hole.

Step 3 — Inserting the new string on the bridge.







- Insert the end of the string with the small hole in it in the opened peg in the bridge.
- Start to insert the peg in the hole with the string under it.
- Push the peg down tightly to make sure that the string will not pop out when enough resistance is put in it.

Step 4 — Inserting the new string in the head







- Pull the string and line it around the tuning peg, underneath the hole. Make sure that the resistance is pretty strong.
- Wrap the remaining strings on the tuning peg about 5 or 6 times.
- Slide the remaining end of the string through the hole and hold it in place.

Step 5 — Tightening the string







- Twist the tuning peg to the right to tighten it.
- Make sure that the string has enough resistance that when it is strummed, there is a tone.

Step 6 — Tuning the guitar in its correct sound







- You can use a tuner by just playing each string in front of it and then just turn the fasteners until
 the tuner shows that the sound matches its appropriate sound.
- Another way is by ear, press down on the fifth fret and the preceding string in which you are trying to tune. For example, if you are tuning the high E string, press down the B string, 5th fret.
- Strumming the B stringwhile pressing down on the 5th fret should make the sound of open E string.
- Match the sounds of both strings and this will tune the high E string.

To reassemble your device, follow these instructions in reverse order.