




# Motorola Droid RAZR Maxx Battery Replacement

Droid RAZR Maxx Battery Replacement.

Written By: jean Florival

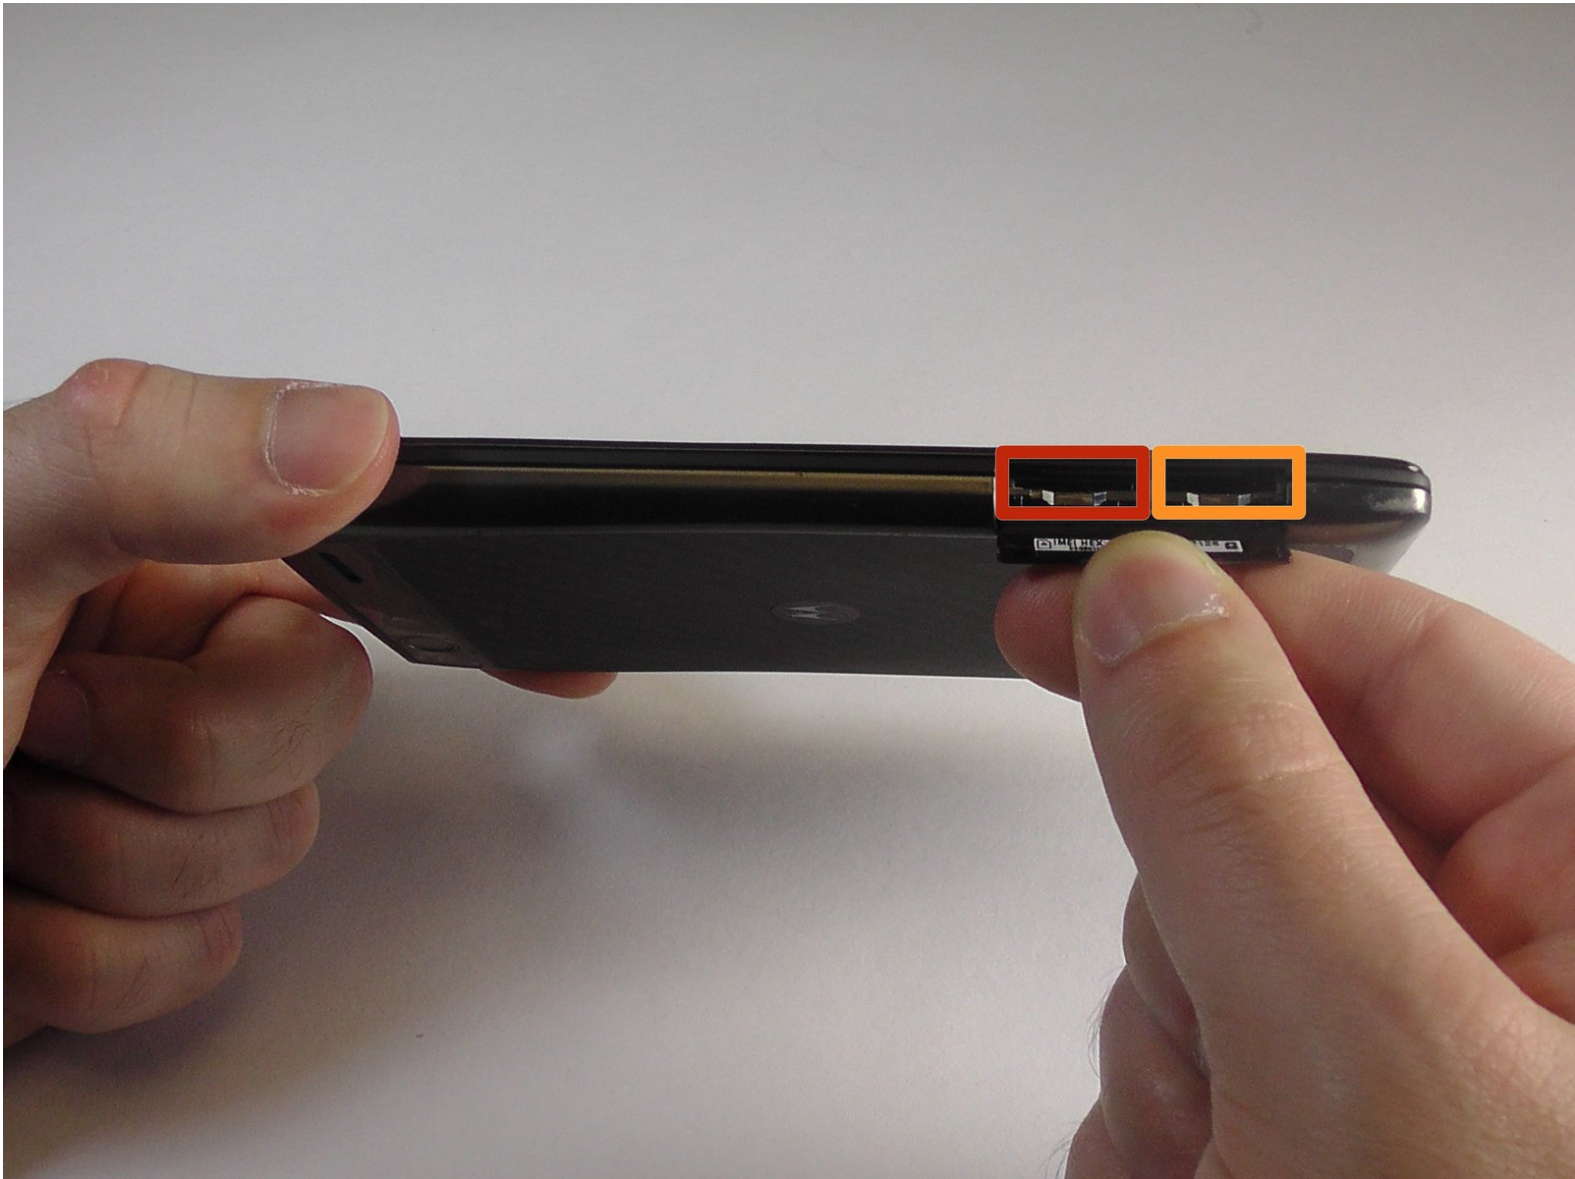

---

## INTRODUCTION

If your Maxx size battery is giving you problems just replace it with a new one.



If your battery is swollen, [take appropriate precautions](#).



### TOOLS:


- [Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [64 Bit Driver Kit](#) (1)
-

## Step 1 — Removing the battery

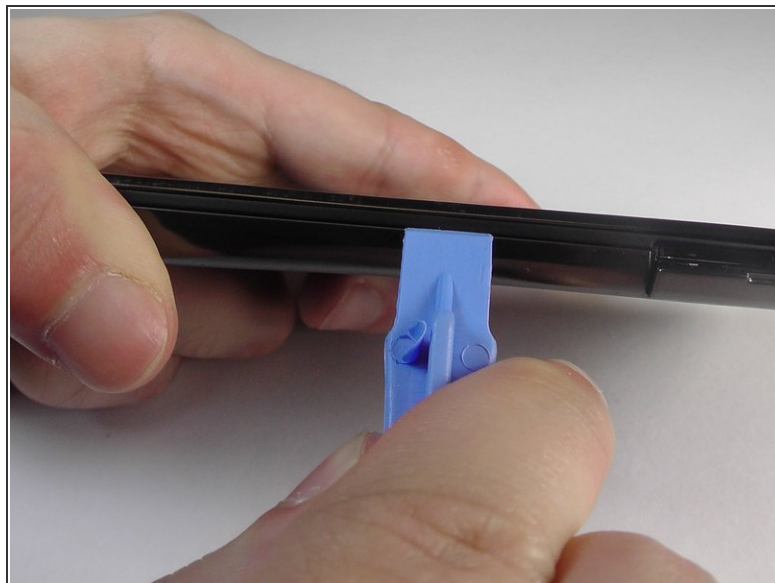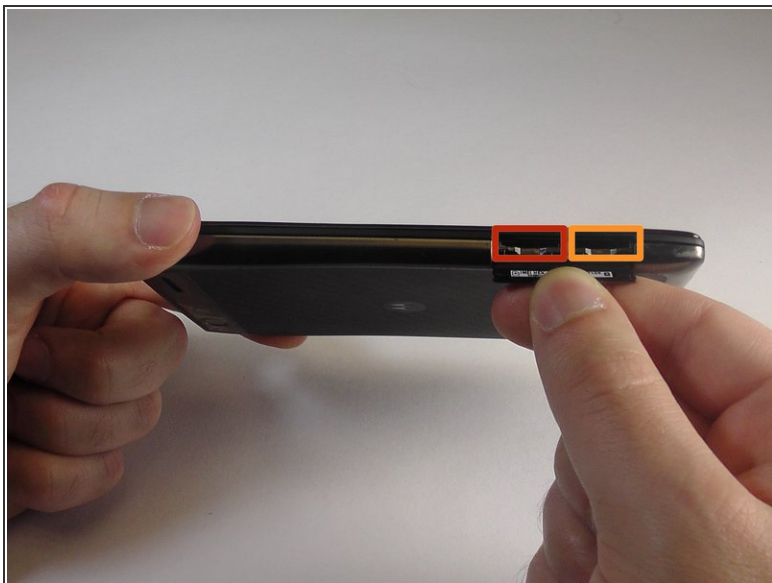

- Remove the SIM card.
- Remove the microSD card.
- Insert the plastic opening tool between the back cover and the front piece of the case, freeing the plastic clips between the phone.
- Do this along the back right side of the phone cover until you reach the top.

## Step 2

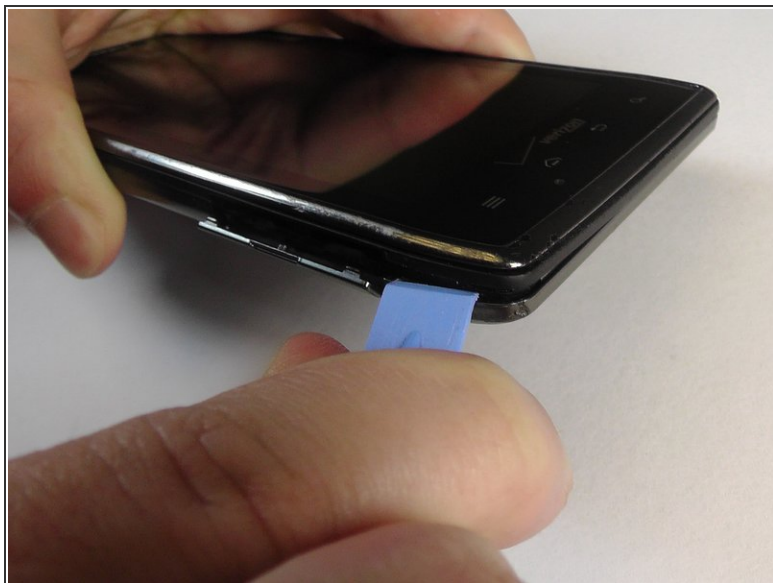

- Use the plastic opening tool to carefully work your way around the top of the phone, freeing the plastic clips.
- ⚠ Be cautious when using the tool around the top of the device because the plastic case is very thin and could easily be cracked or snapped.
- After this continue using the tool and pry down the remaining side and the bottom of the phone.




### Step 3



- With all the plastic clips released, pull away the back cover from the phone to remove it.
- i** The back cover is attached to the battery with a large amount of adhesive. Some force may be required to pull the back cover from the phone.
- i** The back cover is very durable and will not break from some bending or pulling.

### Step 4

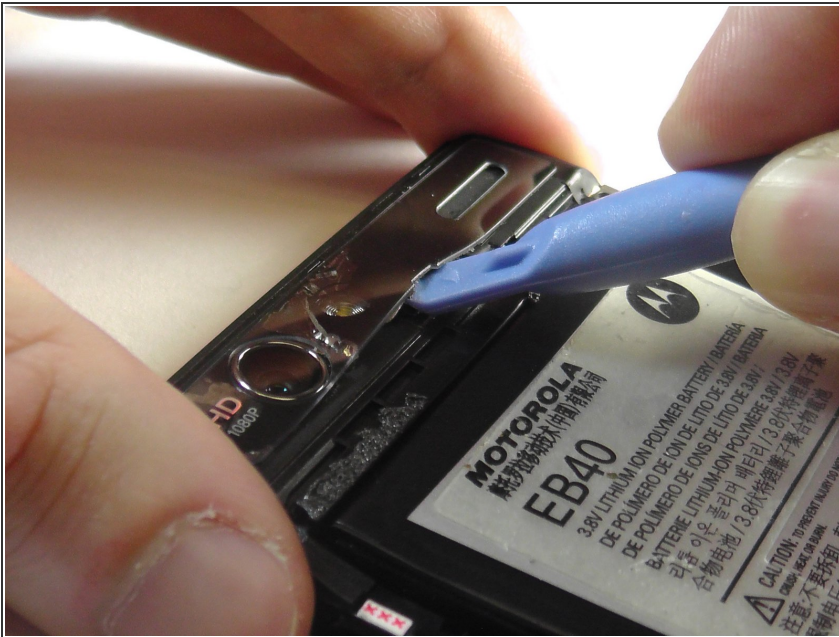

- Looking at the top rectangular hump where the camera is located, use the plastic opening tool to remove the camera cover.
- Using the plastic opening tool, apply pressure into any surrounding crease of the camera cover to remove it.

## Step 5



- Using the T5 and T4 bit pieces, remove the silver screws located around the rear case of the phone.
- Remove the three 6.7 mm silver T4 screws that are located at the top of the phone.
- Remove the five 4.0 mm silver T5 screws that are located near the middle of the phone.

## Step 6



- Using the T5 bit piece remove the three black 4.5 mm screws that are located at the bottom of the phone.




## Step 7



- Insert the plastic opening tool between the rear case and motherboard assembly.
- Using the plastic opening tool, carefully work your way around the phone, freeing the plastic clips.
- Carefully pull the rear case off the motherboard assembly.



## Step 8

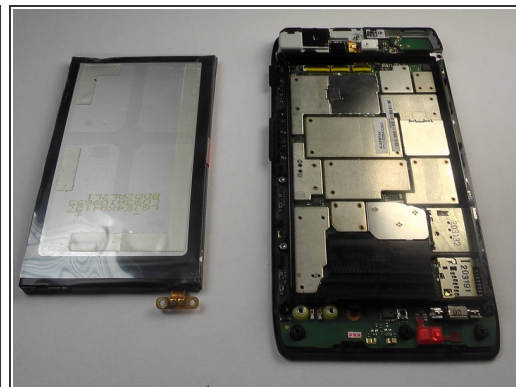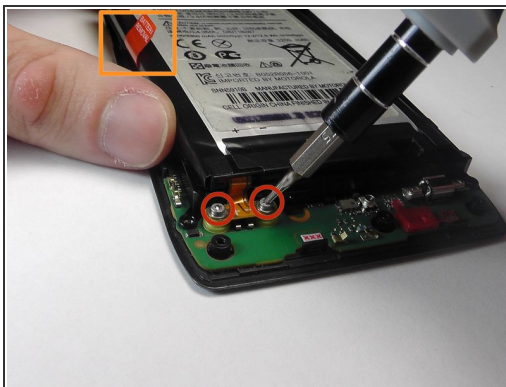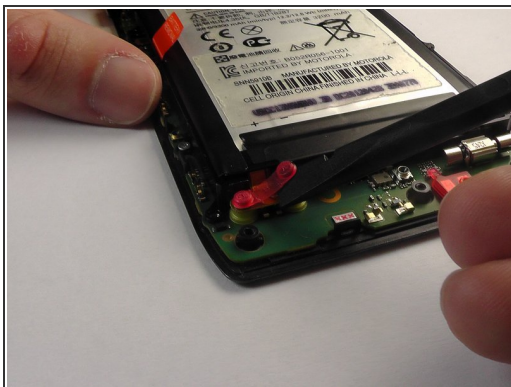

- Using the tip of the spudger, lift the red silicone cover off the battery terminal screws.
- Remove the two 3.3mm T5 Torx battery terminal screws.
- Grab the red battery removal tab and pull the battery out.
- There might be some adhesive between the battery and motherboard assembly.

To reassemble your device, follow these instructions in reverse order.