



Polyconcept 900-MHz Retro Cordless Telephone Device Antenna Replacement

Replace the antenna on the base of the phone.

Written By: Tia



INTRODUCTION


Sometimes users have trouble with static on their phone meaning the connection between the handset and base may be faulty. This guide shows how to replace the antenna on the base of the phone.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Removing the Antenna Screw

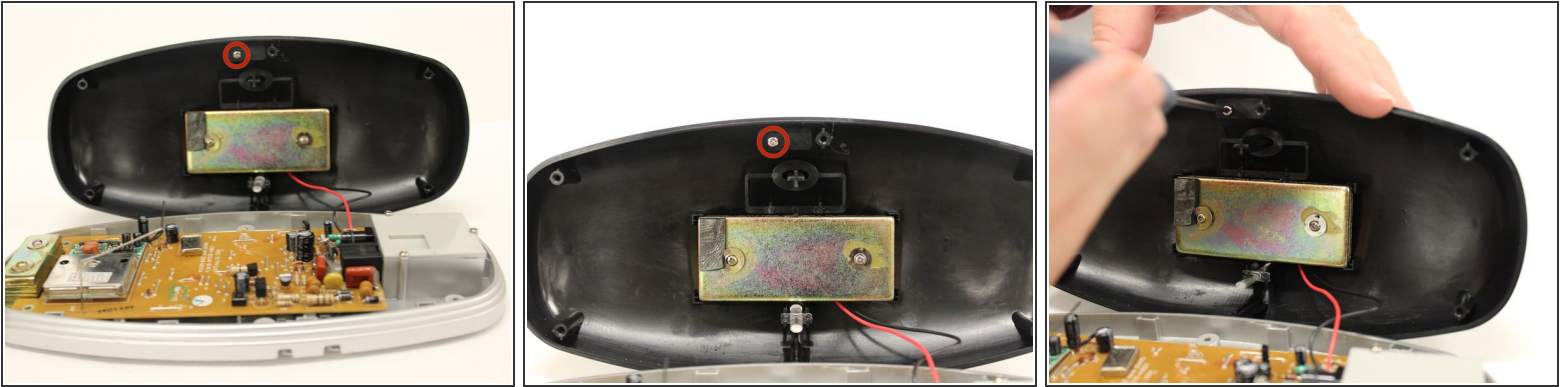



- Inside the base cover, locate the screw holding the antenna in place and use a Philips #00 screwdriver to remove the 6mm screw.

Step 2 — Removing the Antenna Foot

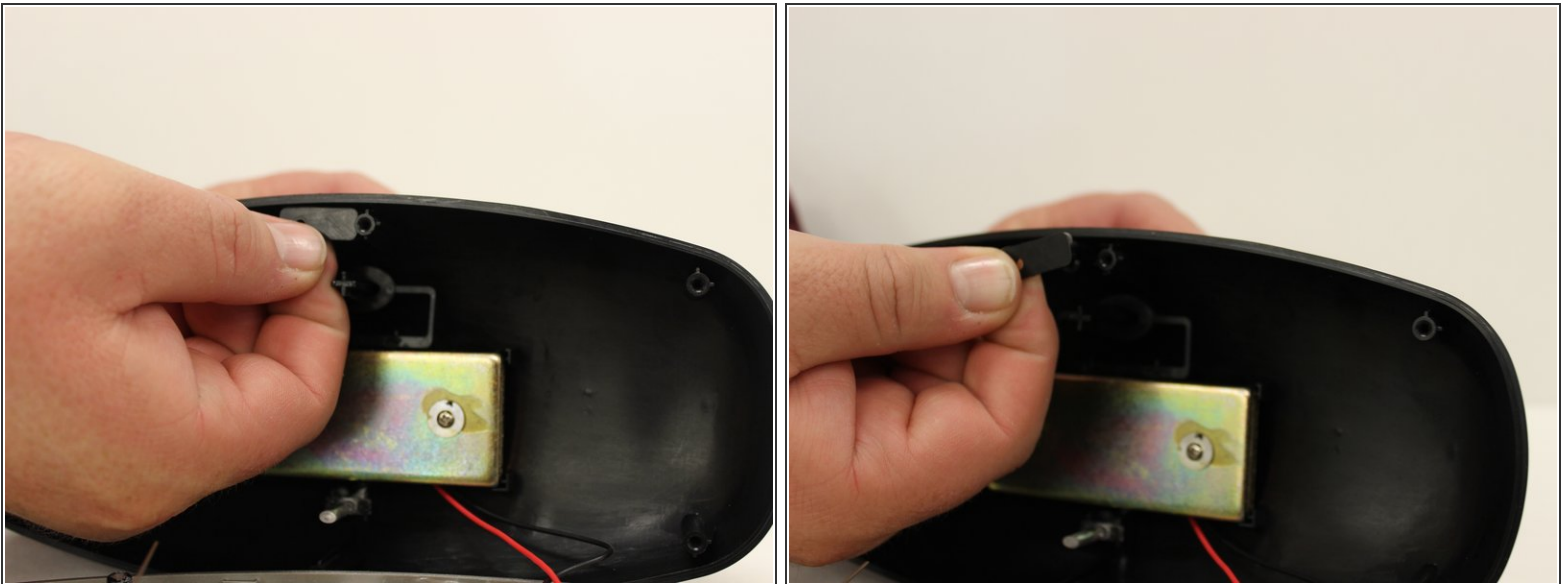

- Grasp the plastic antenna foot and pull toward you.

Step 3 — Removing the Antenna

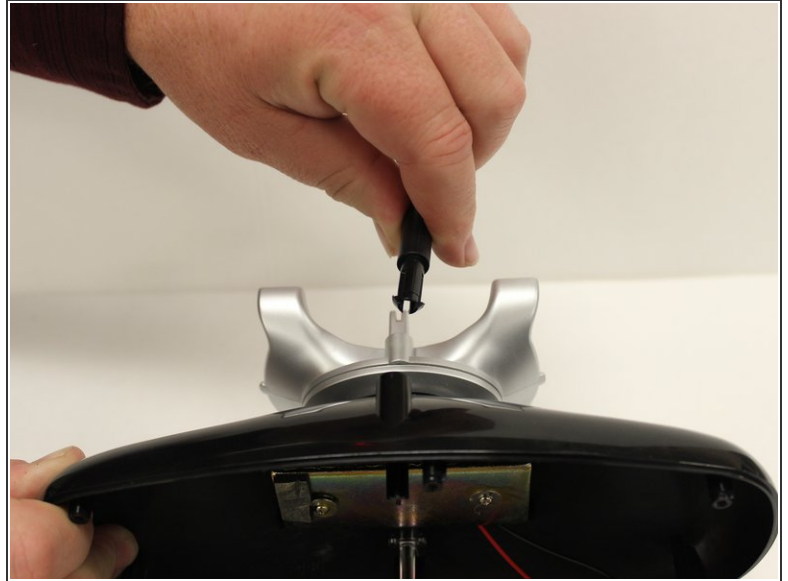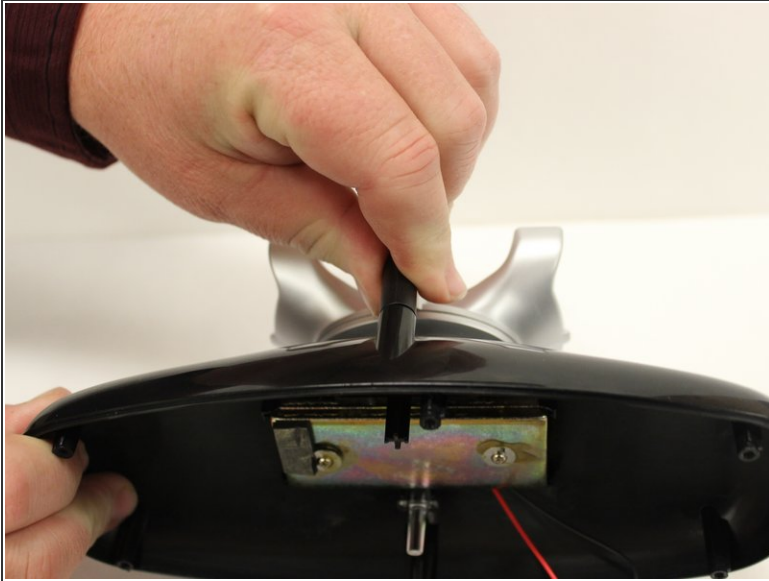

- Pull antenna from the top side of the phone base cover.
- ⓘ It helps if you gently wiggle the antenna back and forth to loosen the clips.

To reassemble your device, follow these instructions in reverse order.