



ASUS PadFone X Station Battery Replacement

This guide will have you remove the battery using a Phillips head screwdriver and then removing the ribbons in order to remove the battery. This process will require only the Phillips head.

Written By: Paul Wagner





TOOLS:


- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

Step 1 — Back Cover




- Using the plastic opening tools, insert it into the edge and pry open.
- Use hands to help pull the back off from the front if needed.

Step 2 — Finding the Battery

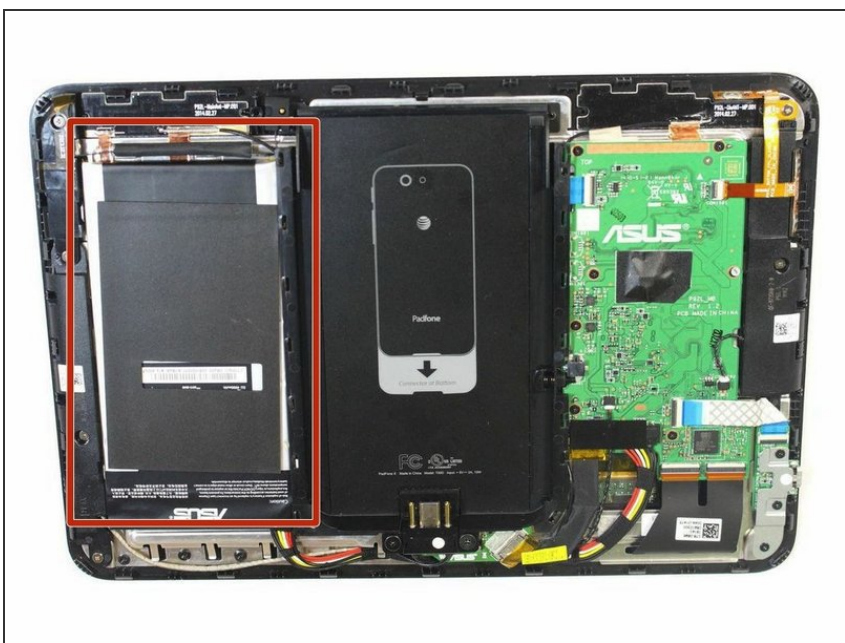


- Locate 4600mAh Battery

Step 3 — Removing the Protective Cover

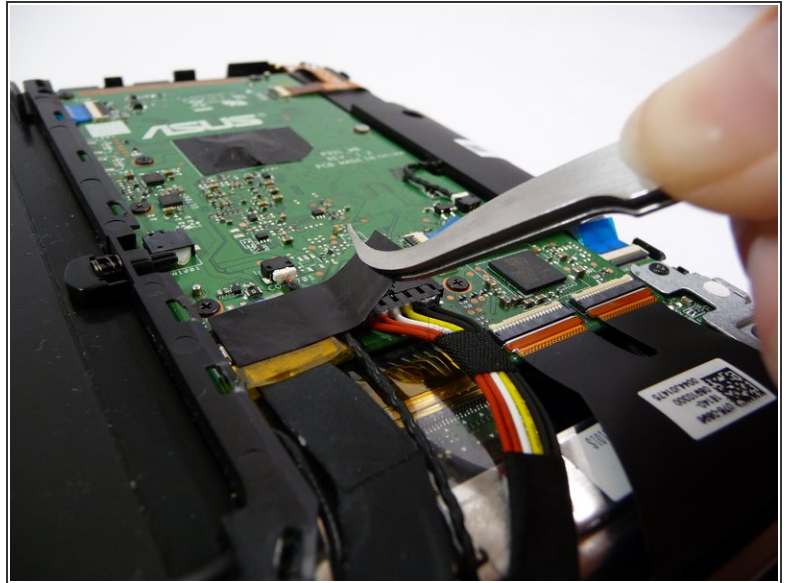


- Locate (+) and (-) battery terminals
 - Trace black, white, red, and yellow wires to connection on motherboard
- Remove protective plastic cover with tweezers

Step 4 — Disconnecting the Ribbon

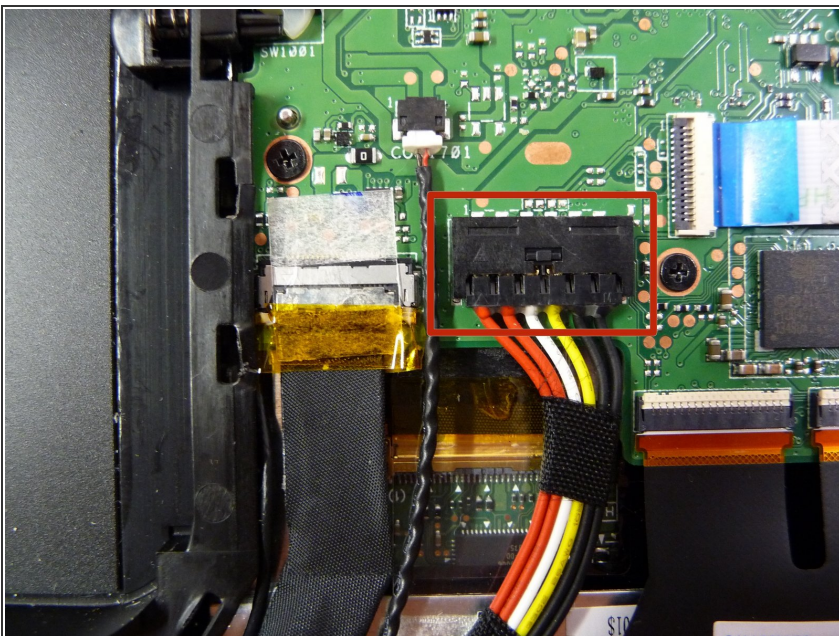




- Disconnect connect ribbon by gently pulling with fingers
- ⚠ Ensure the ribbon does not touch metallic items (This may short out battery and cause an explosion)

Step 5 — Removing the Screws

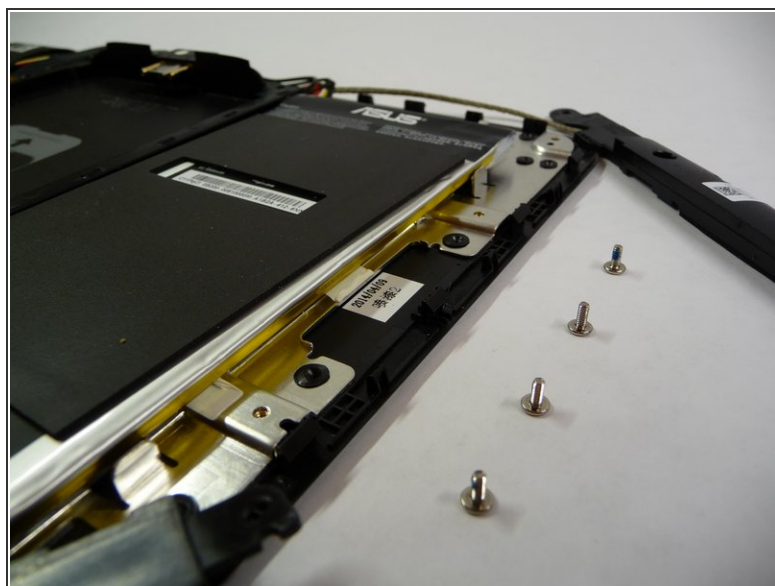

- Remove (4) screws

Step 6 — Taking out the Battery

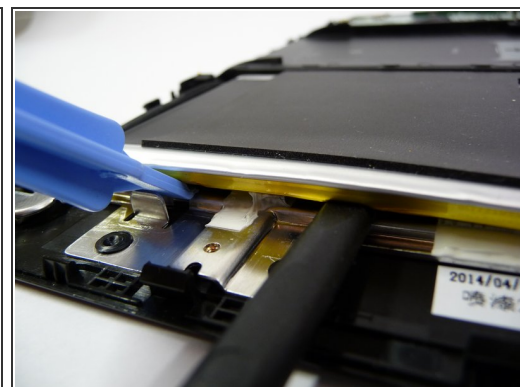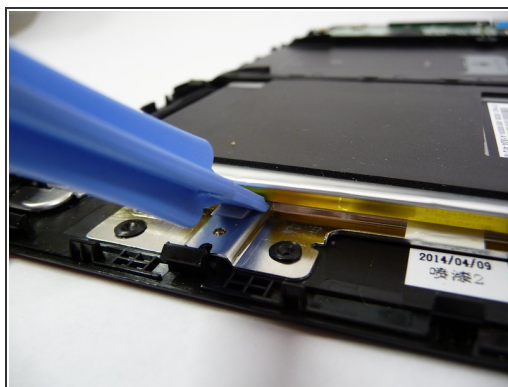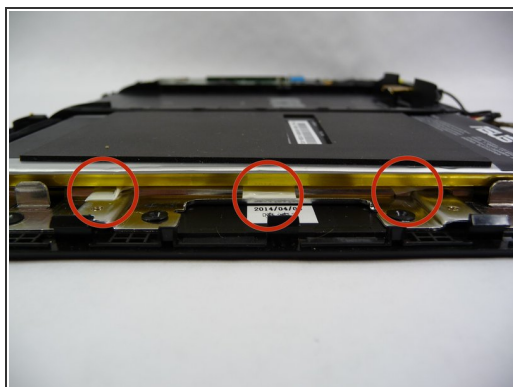

- Gently pry battery off glued surface
 - Use of a plastic opening tools and a spudger are necessary

To reassemble your device, follow these instructions in reverse order.