


Sony Xperia T2 Ultra Dual Midframe Replacement

Remove the internal cover to get to the other components of the phone.

Written By: Christina Wojaczyk

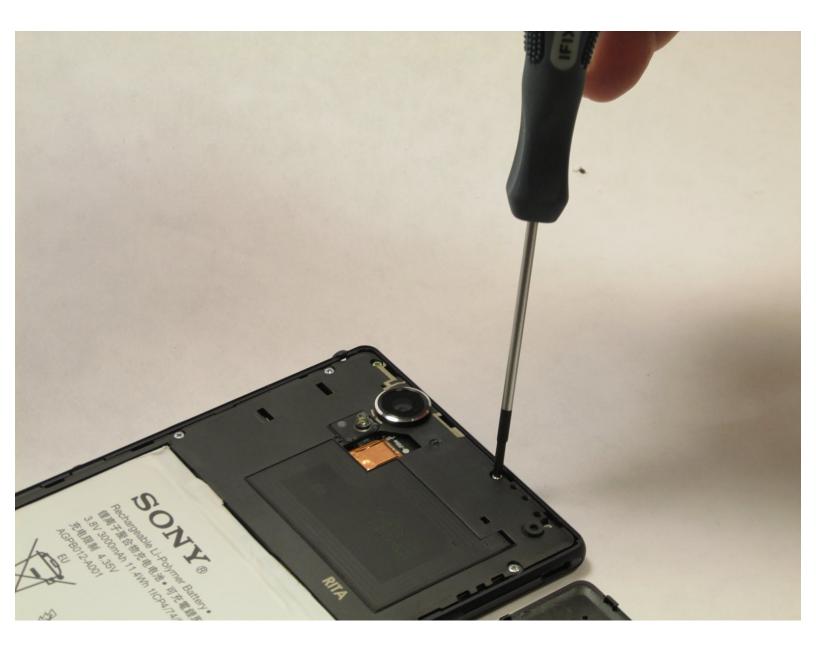


INTRODUCTION

This guide can be used to remove the internal cover to access other components of the phone.

TOOLS:


- Phillips #00 Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — Rear Case

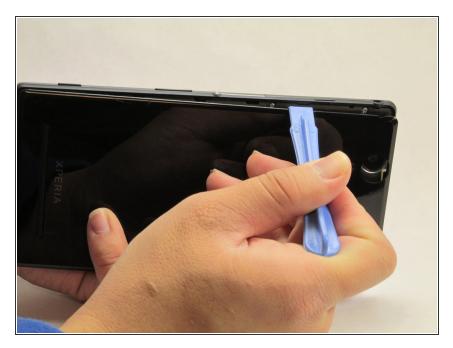

 Using the spudger, pry open the back cover by starting alongside the edge of the back cover.

Step 2

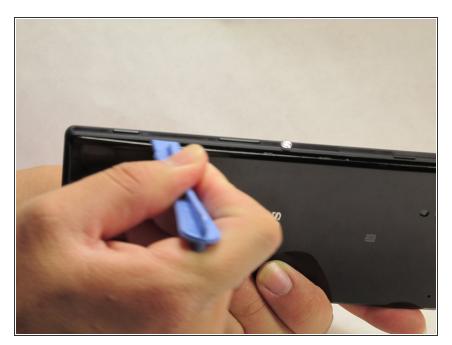


 Once the part of the back cover has been opened up. Slide the spudger to pry completely detach the cover from the phone.

Step 3 — Removing the internal cover



 Using the Phillips #00 Precision screwdriver, take out 8 silver screws (3.15mm) and 5 gold screws
(3.9mm) for a total of all the screws attached to the flat plate. 3 of the gold screws are located at the top of the phone and the other 2 screws are located at the bottom of the phone.

Step 4

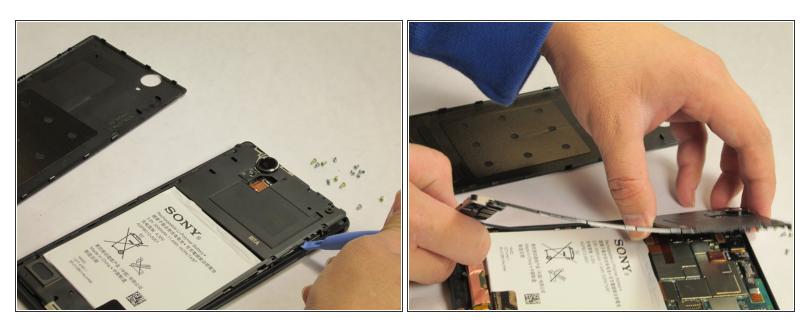

• To remove the internal cover, use the plastic spudger tool and pry the cover from the phone as shown in the picture.

To reassemble your device, follow these instructions in reverse order.