



Chromo Inc. T2 Internal Speaker Replacement

Written By: Ismael DeLuna



 **TOOLS:**


- [iFixit Opening Tools](#) (1)
 - [Soldering Iron](#) (1)
-

Step 1 — Removing the Casing




- Using your Plastic Opening Tool, place it in between the screen and the case. Slowly move it around the casing while prying in a downward motion to undo the hinges holding the two together and separate the two parts.

Step 2 — Turn it around

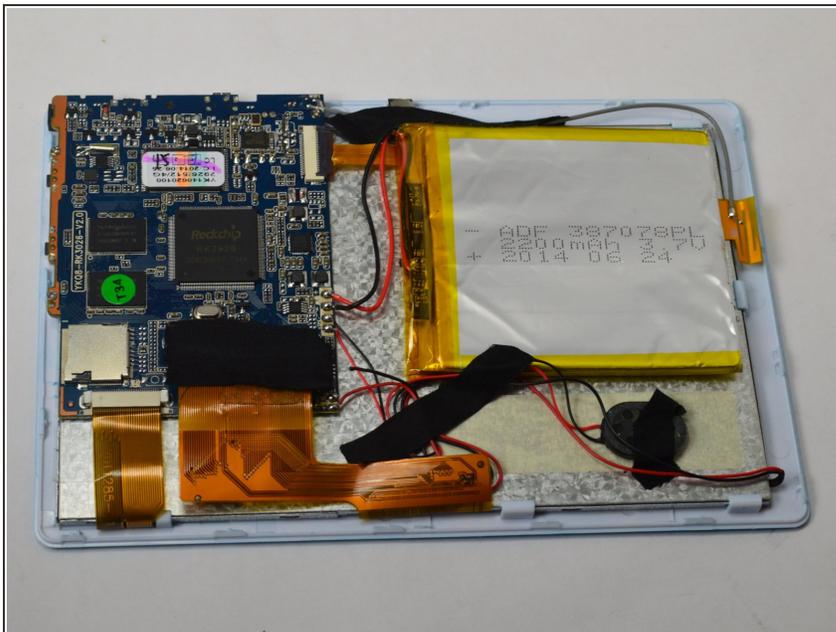


- After separating the case and screen, turn your screen face down so you can see the internal parts!

Step 3 — Removing the Tape

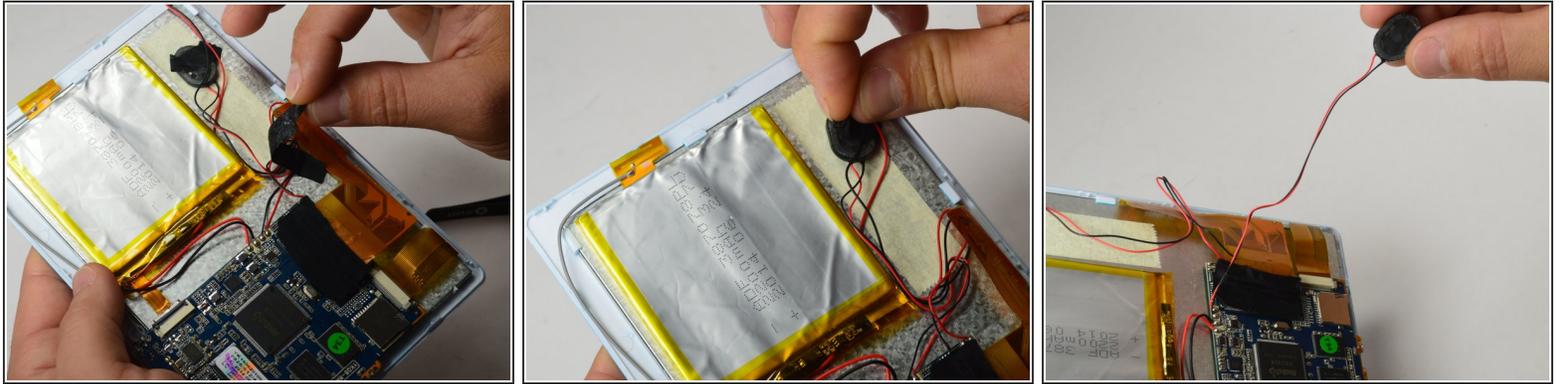

- Remove two strips of tape: One holding down the wires and the other holding down the internal speaker.

Step 4 — Desoldering the Wires and Removing the Speaker

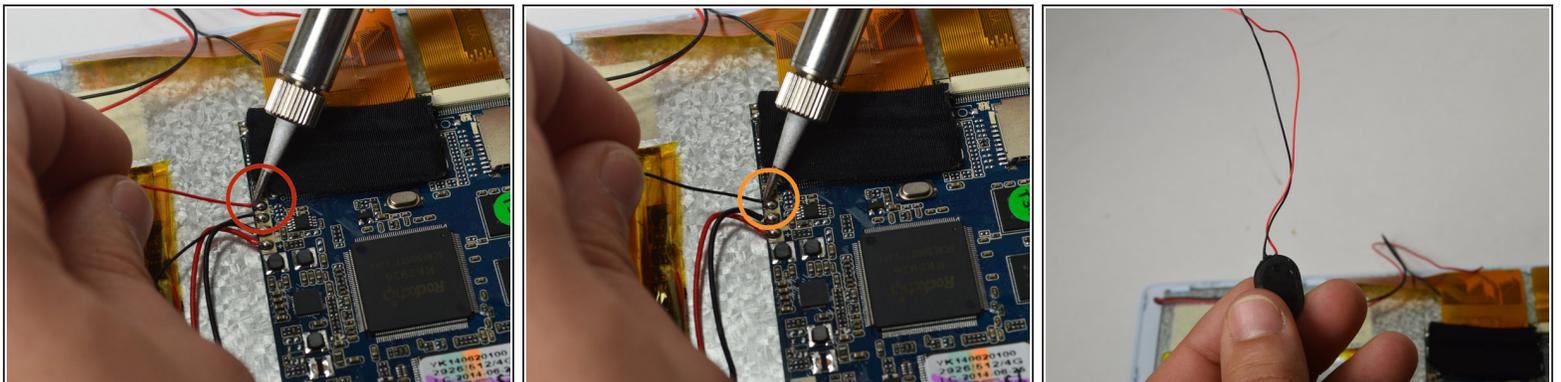

- Using a Soldering Iron, desolder both speaker wires. Once both wires are desoldered, your Internal Speaker is now ready for replacement!

⚠ Soldering Iron gets very hot, take care to not touch anywhere on the soldering iron except for the handle!

To reassemble your device, follow these instructions in reverse order.