




Vivitar XO 7 Motherboard Replacement

Removing the Motherboard from the tablet.

Written By: James Lunn

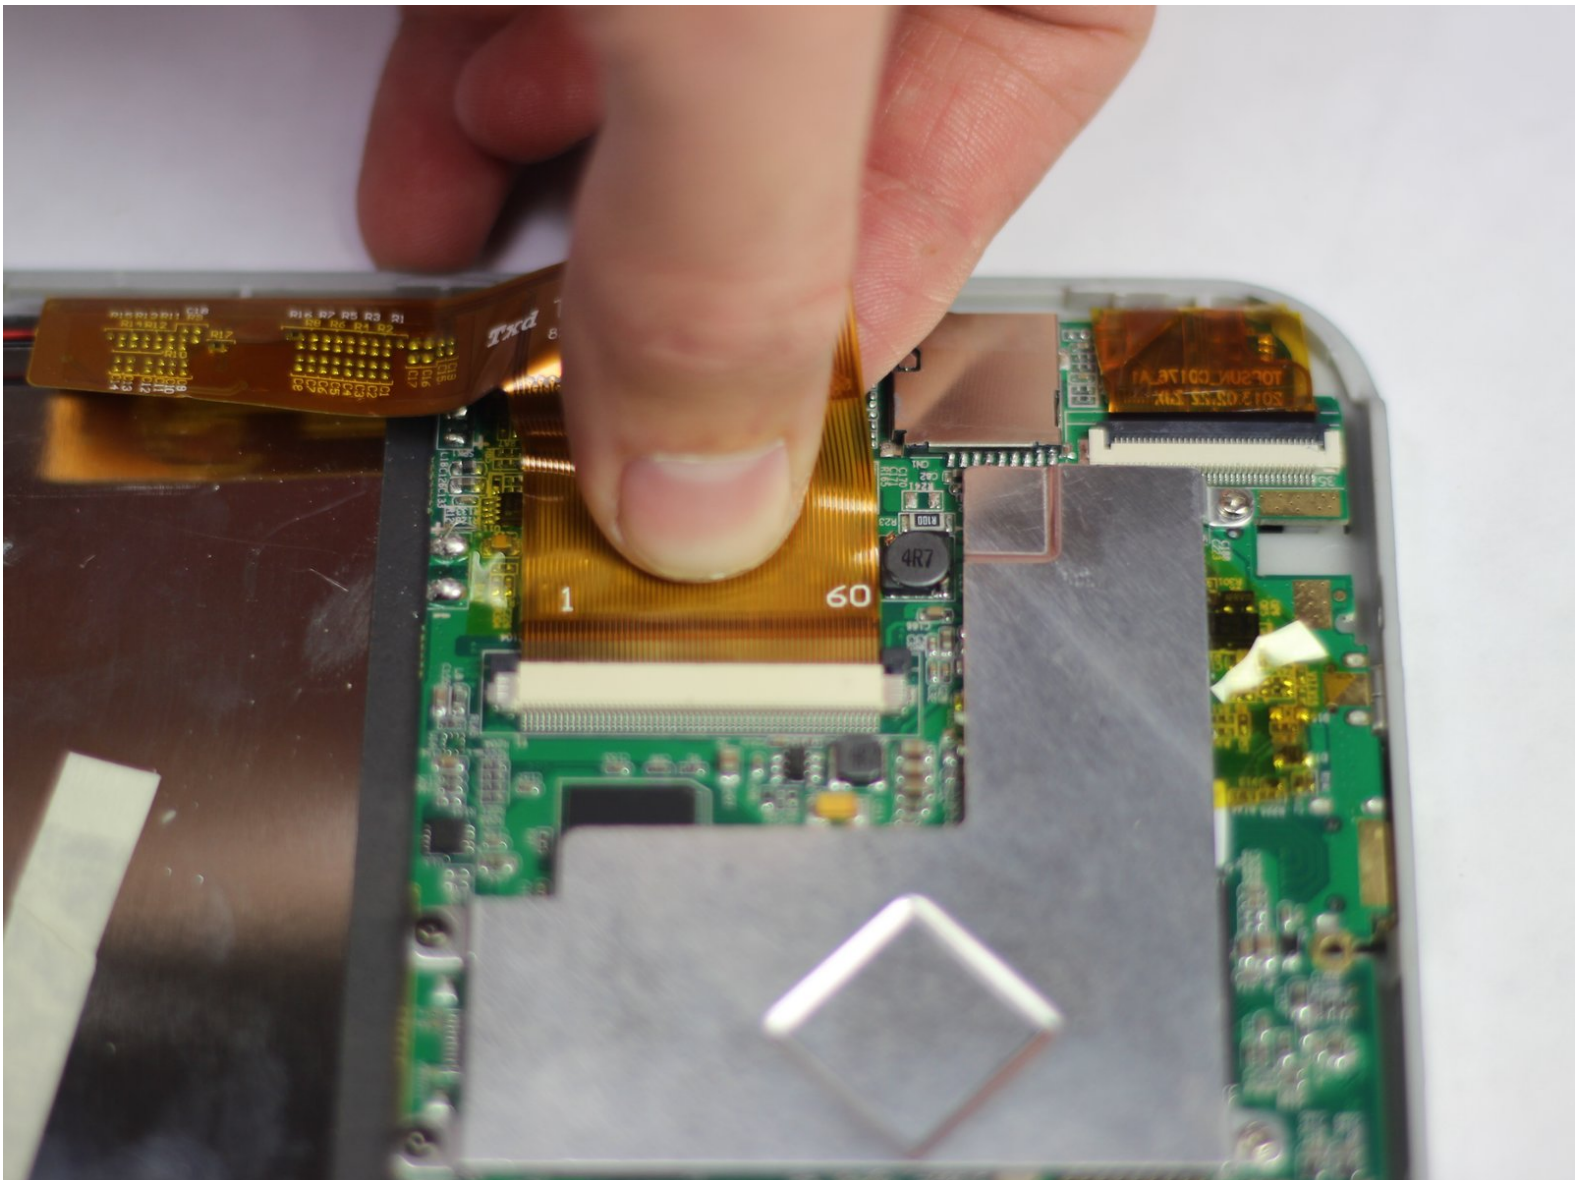

INTRODUCTION

This guide will show you how to remove your device's motherboard.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Back Cover



- Remove the two 3mm Phillips #00 screws on the bottom of the tablet.

Step 2





- With the plastic opening tools, pry open the back cover.

Step 3





- Remove the back cover from the tablet.

Step 4 — Battery

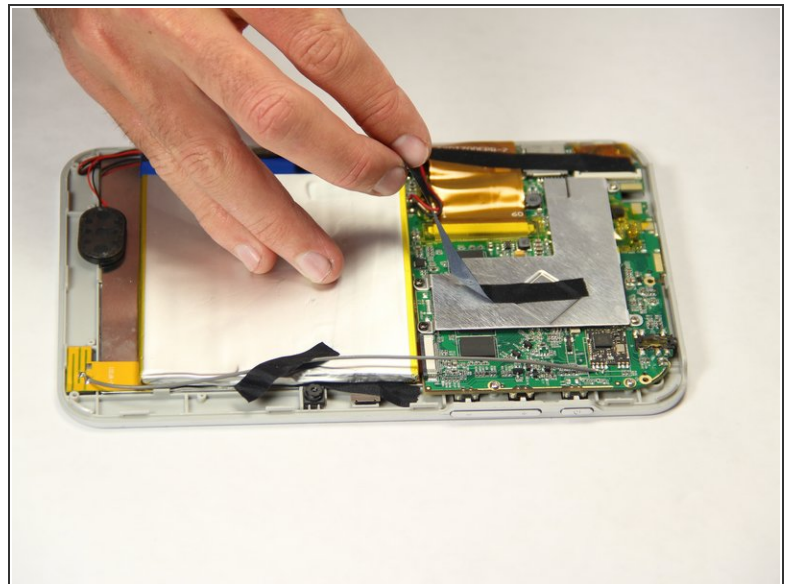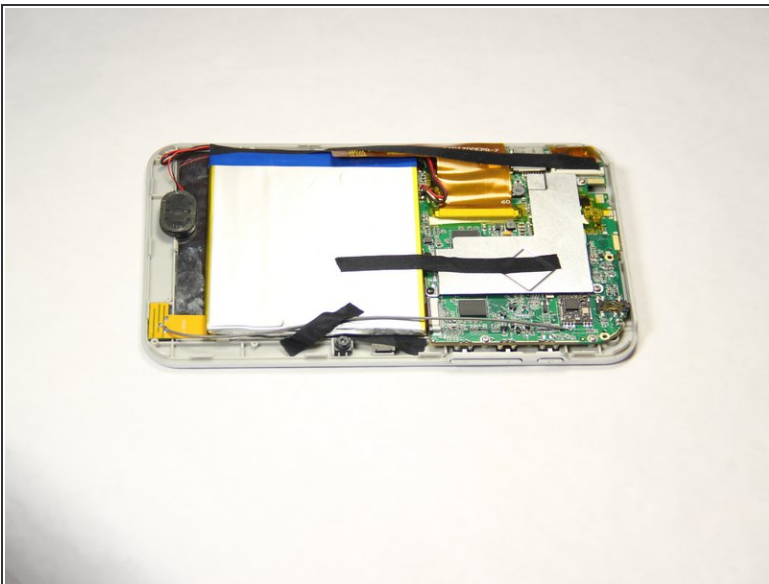



- Peel off the black pieces of tape from the internal components.

Step 5

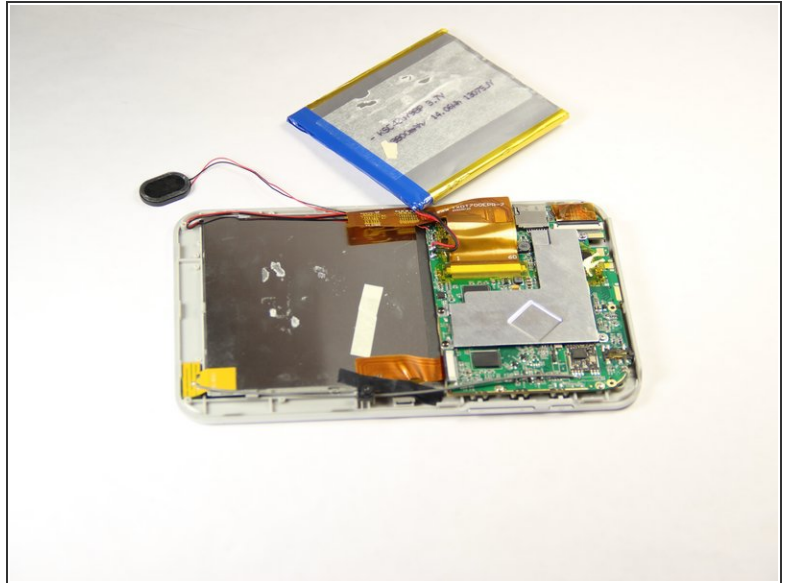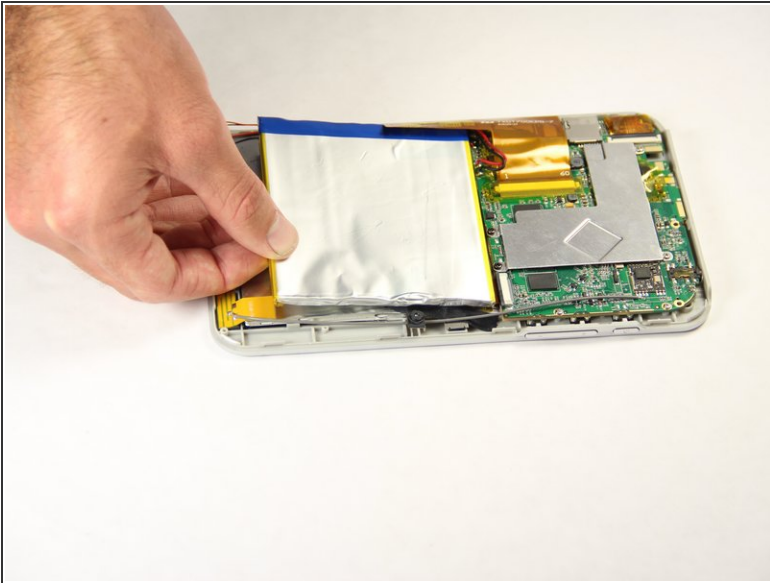

- Carefully remove the battery from the tablet.

Step 6

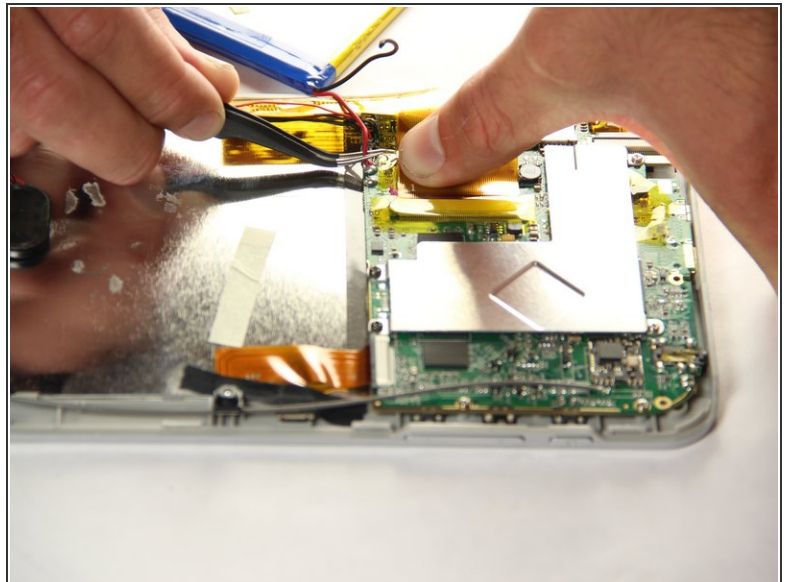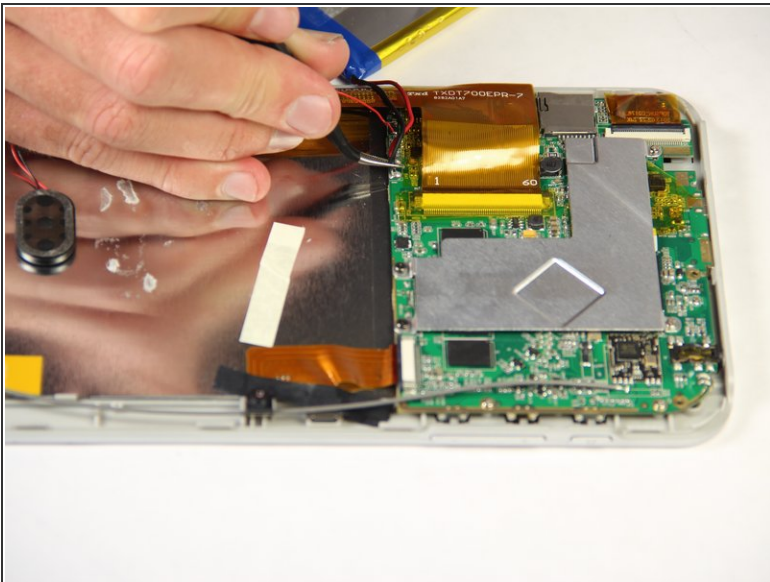



- With the tweezers, firmly grab the wire at the base and pull to disconnect the battery from the motherboard.

Step 7 — Speaker




- Carefully remove the speaker from the metal plate with your hands.

Step 8

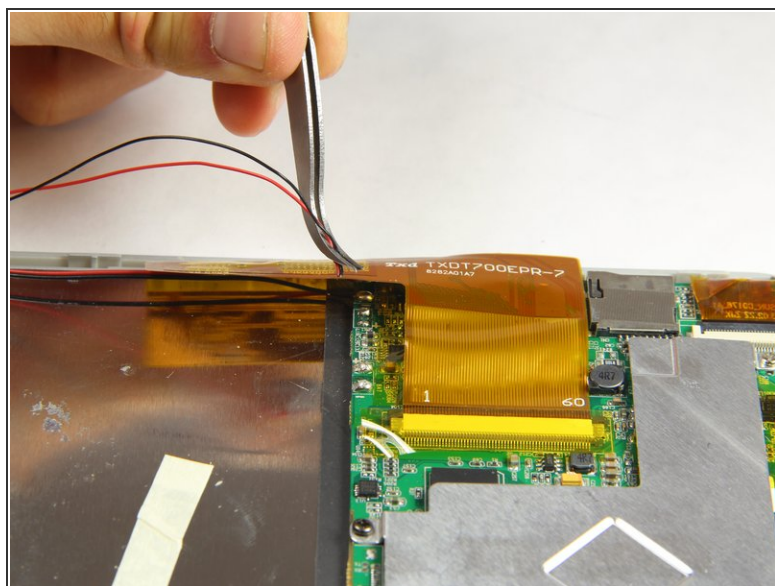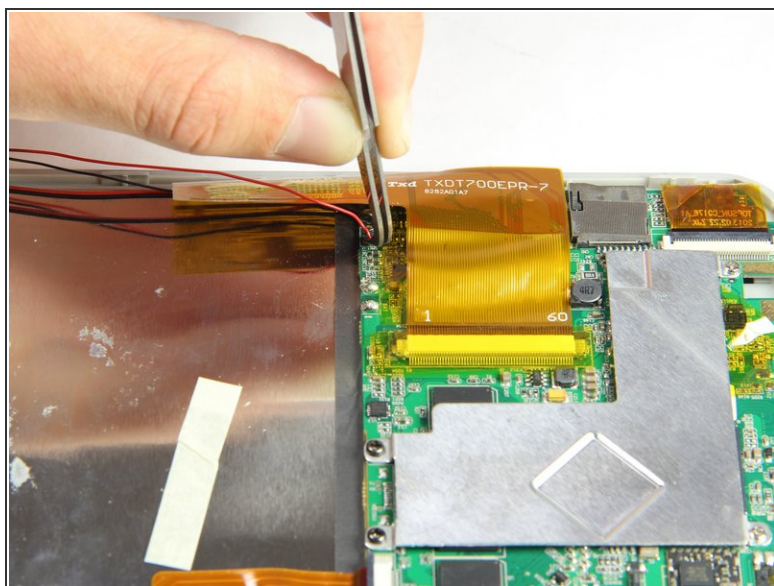


- With tweezers, firmly grab the wire at the base and pull to disconnect the speaker from the motherboard.

Step 9 — Camera

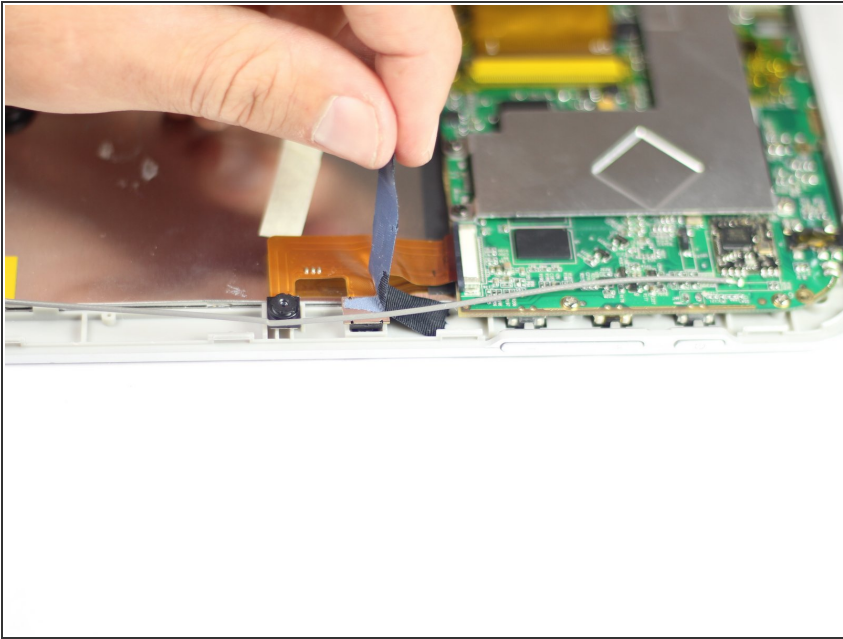



- Peel off black tape that is holding the camera in place.

Step 10

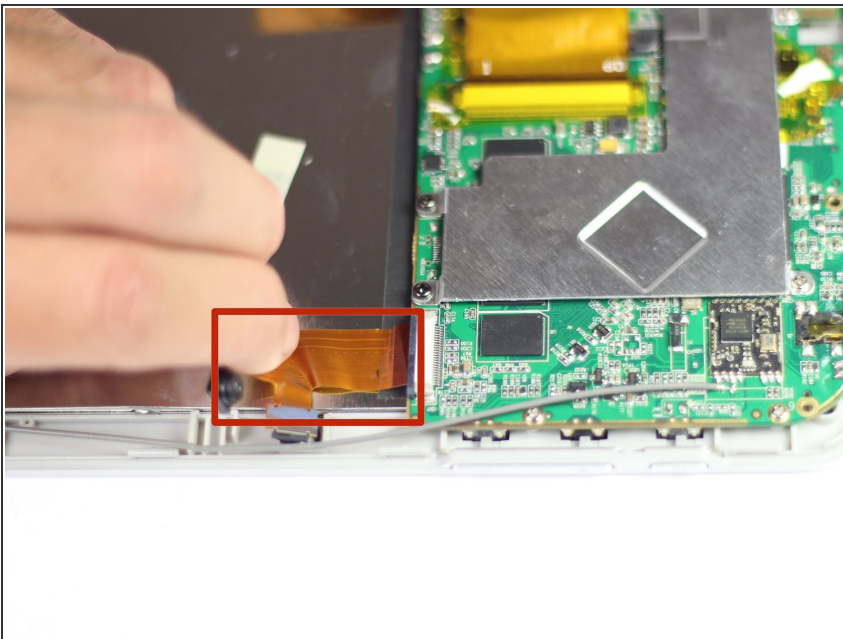


- Carefully disconnect the ribbon cables from the motherboard.

Step 11

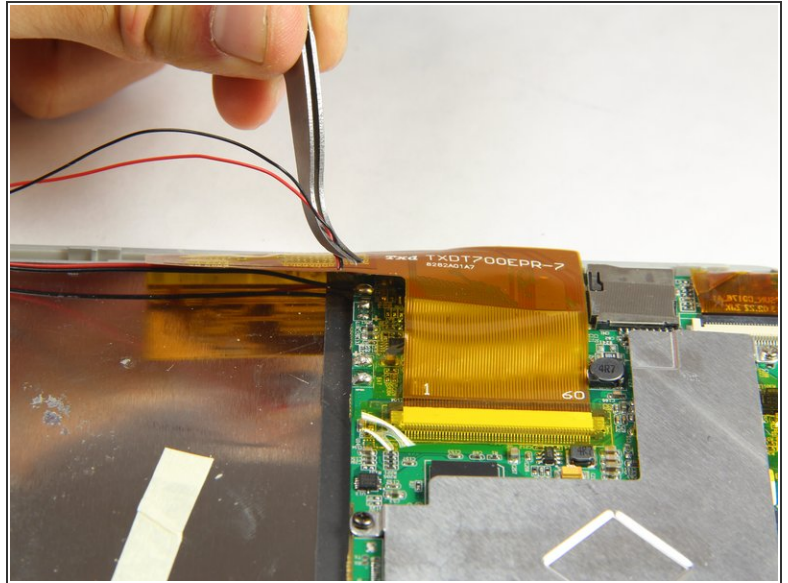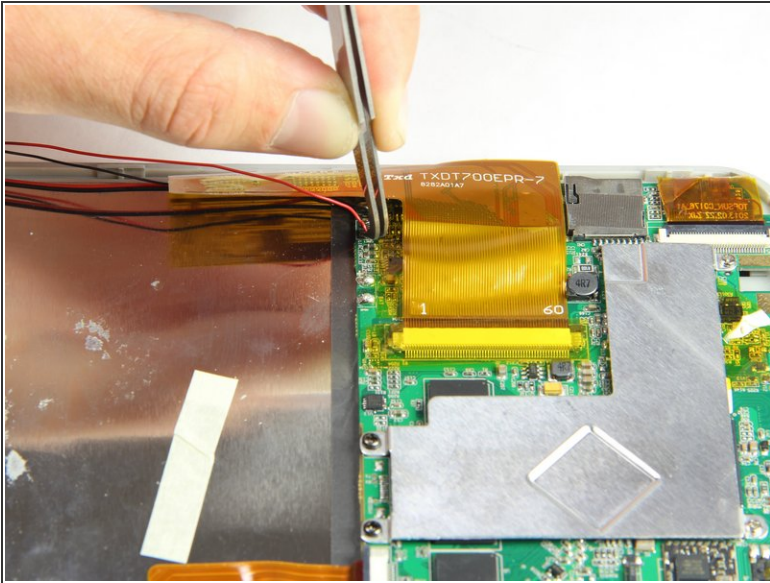

- Using the tweezers, firmly grab wires and pull to disconnect them from the motherboard.

Step 12 — Motherboard

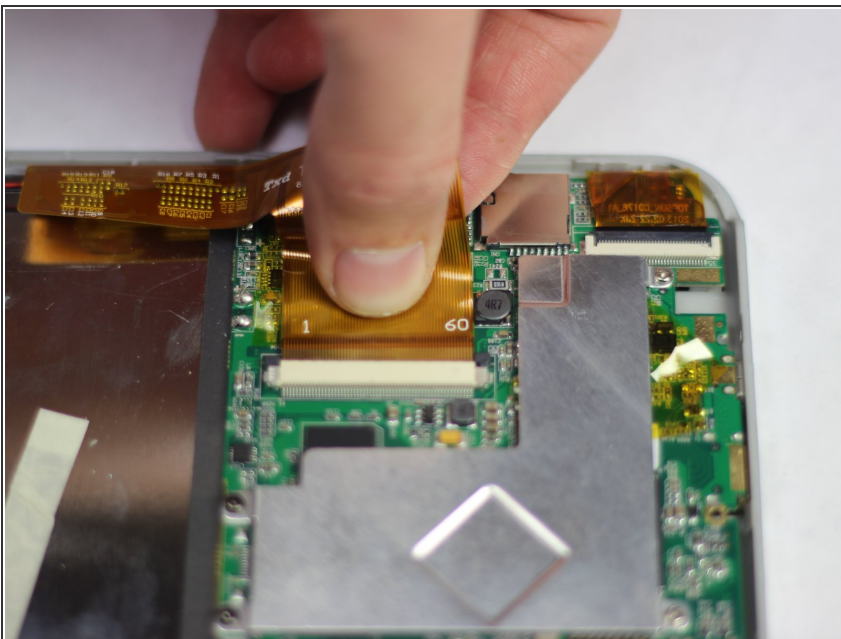

- Disconnect the large golden ribbon cable that is connected to the digitizer. Firmly grab the cable close

to the connection and pull to disconnect.

Step 13



- Remove four 4mm PH00 silver screws from the motherboard.

Step 14




- Remove two 2mm PH00 black screws from the motherboard.

Step 15



- Carefully remove the silver cover from the motherboard.

Step 16

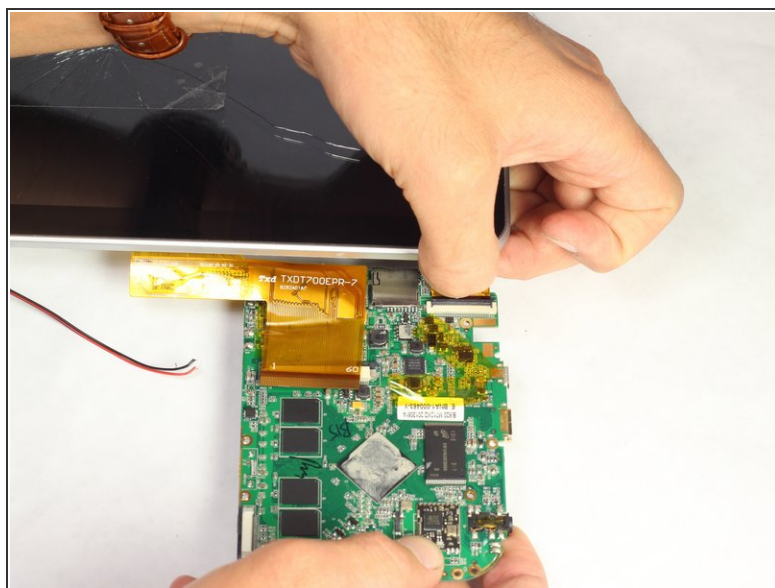

- Gently pick up and turn over the motherboard. While turned over, disconnect the last ribbon cable that connects to screen.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-11-15 11:06:25 AM (MST).

