




# HKC P776A Camera Replacement

This will guide you through replacing the camera.

Written By: Ryan Gornati

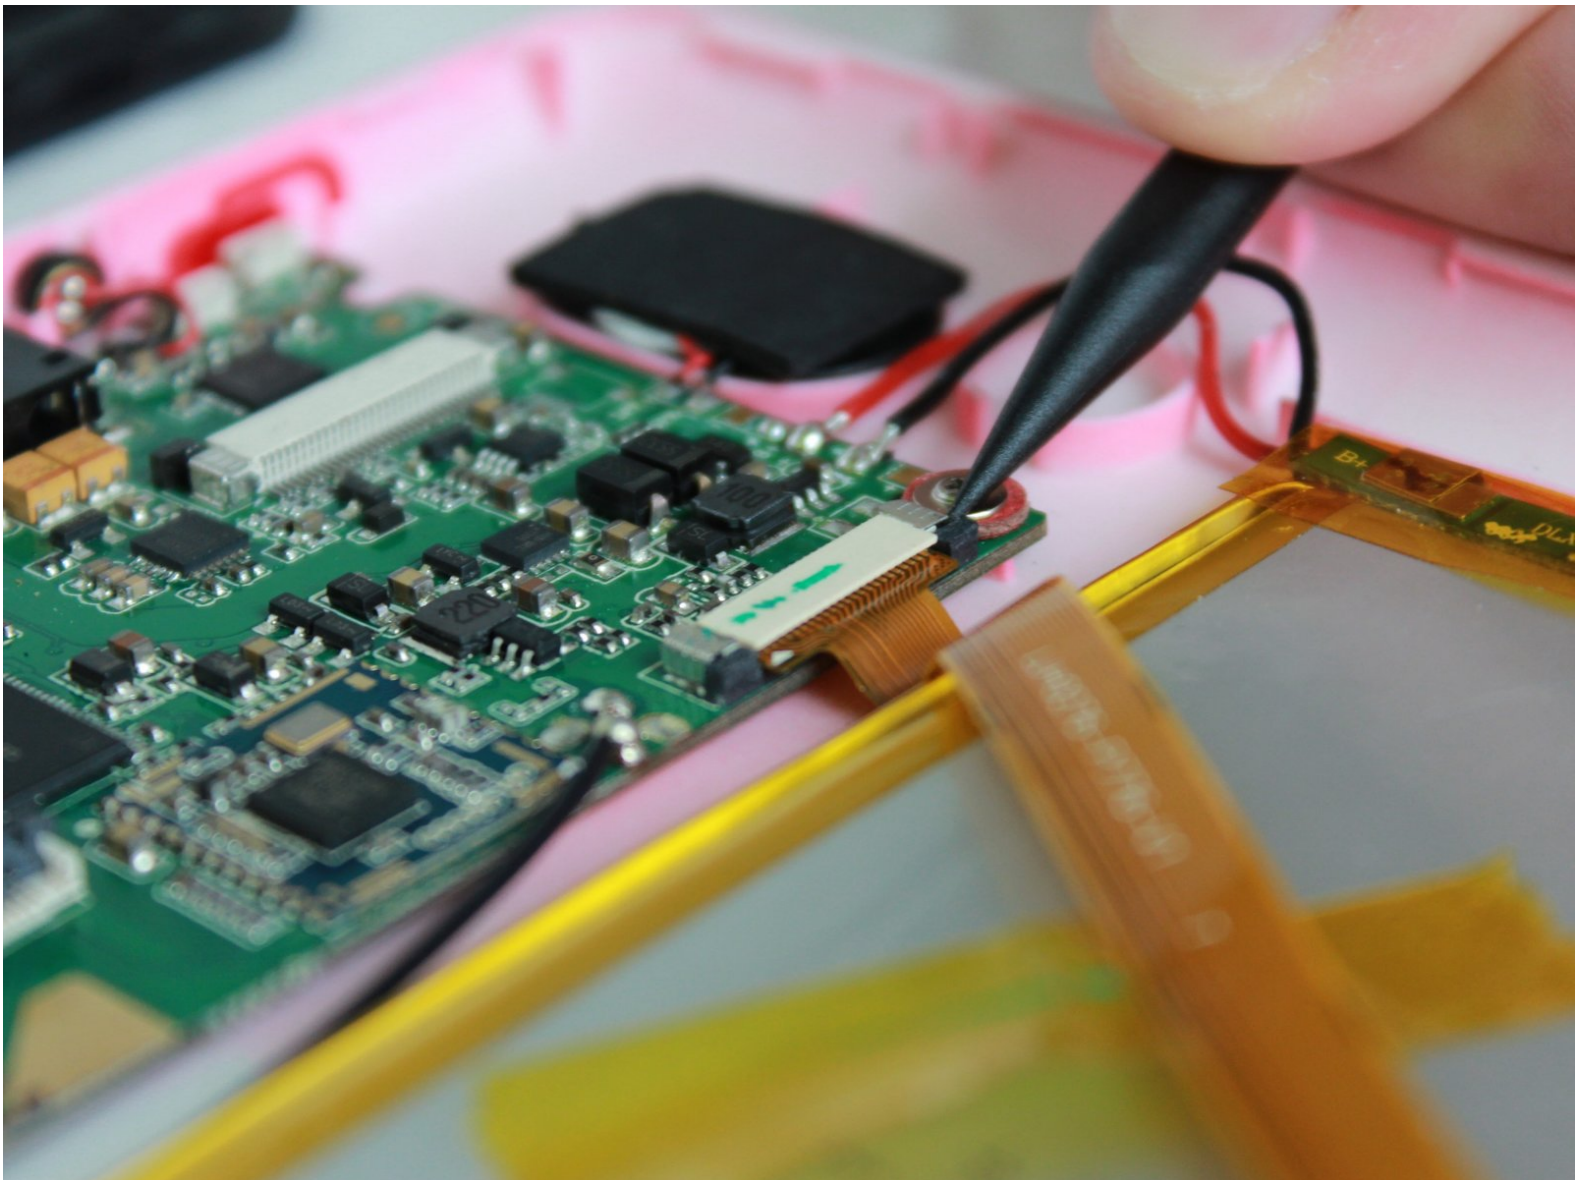



## TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Separating Digitizer and Case



- Insert the plastic opening tool between the digitizer and the case.
- Place the spudger in the gap created by the plastic opening tool to assist in separation.



## Step 2

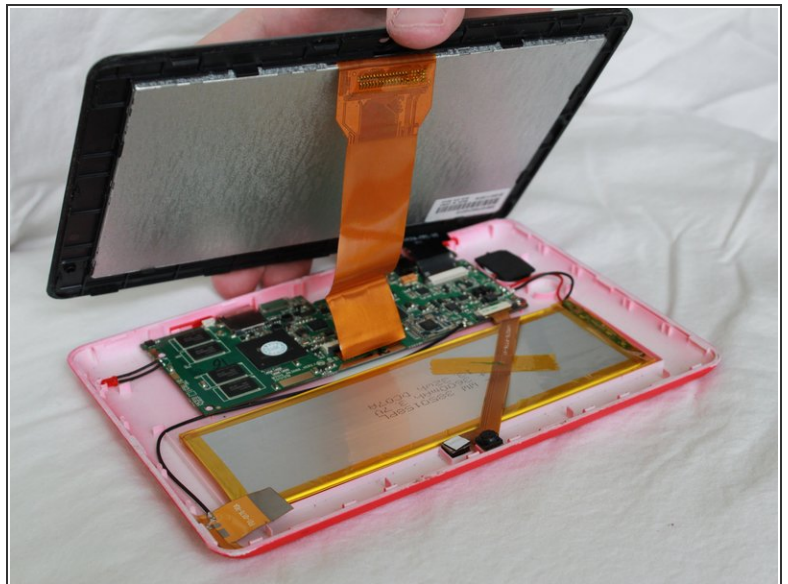

- Slide the spudger along the perimeter of the device to fully separate the two pieces.





### Step 3 — Removing the Cable from the Moatherboard

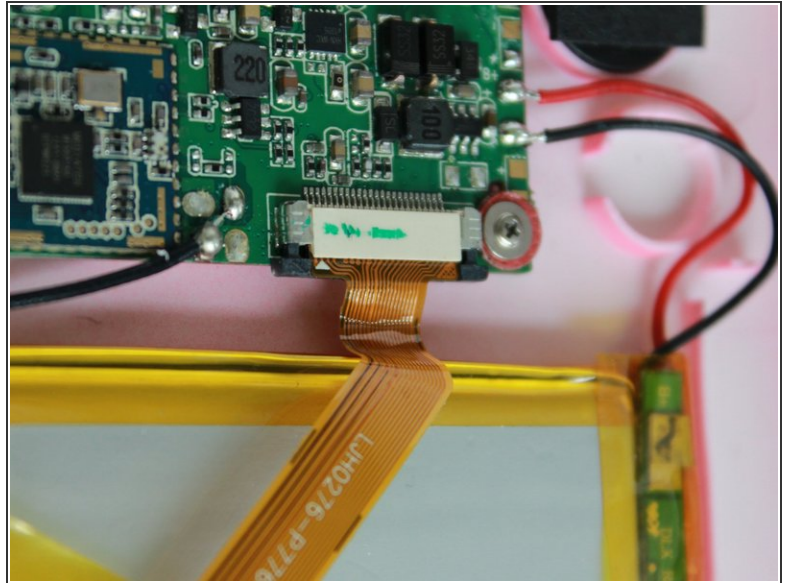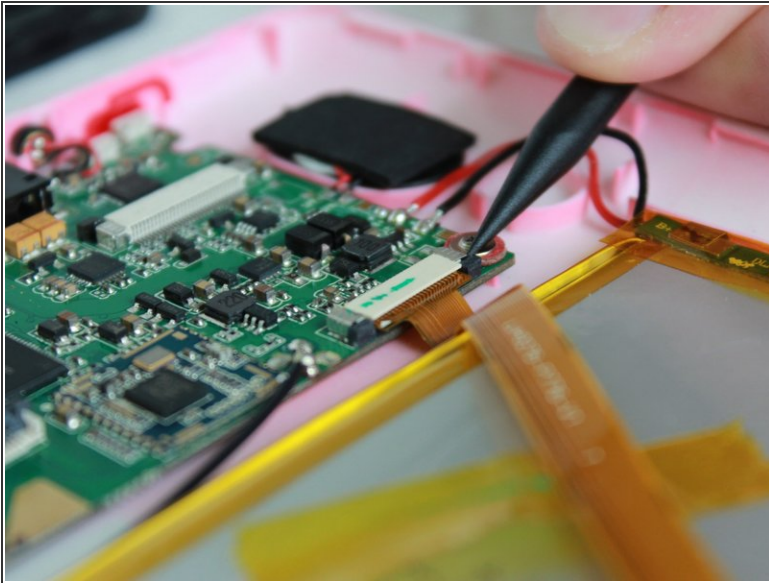

- Use the tip of the spudger to release the latches on the motherboard.

### Step 4

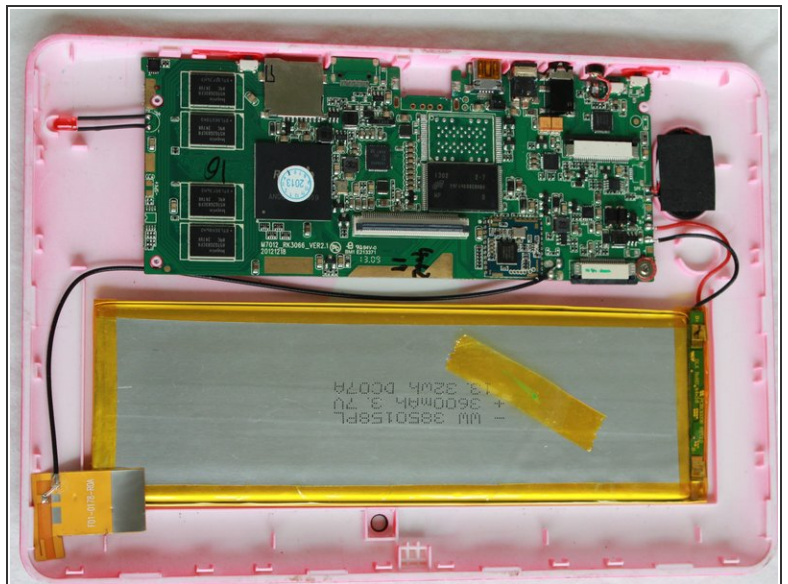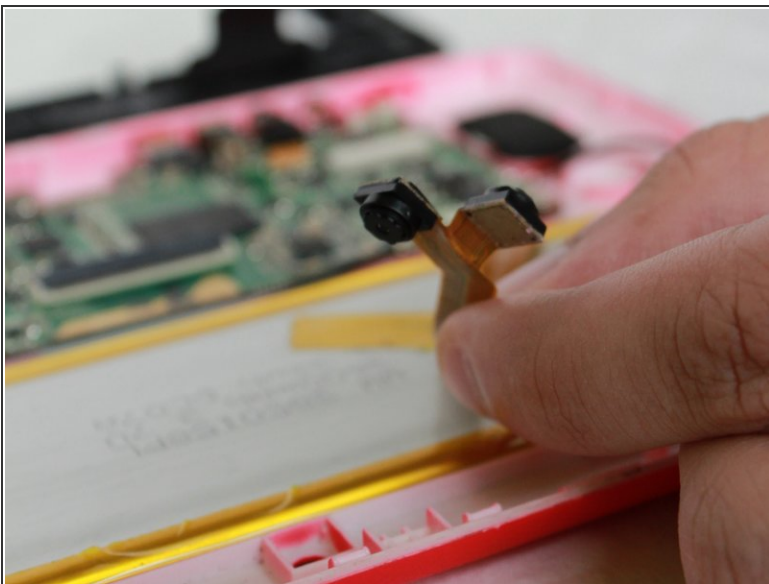

- Remove the camera from the device.

To reassemble your device, follow these instructions in reverse order.