



HKC P776A Wifi Antenna Replacement

Written By: Ryan Gornati



TOOLS:

Spudger (1)

iFixit Opening Tool (1)

Soldering Iron (1)

Lead-Free Solder (1)


Desoldering Pump (1)

Step 1 — Separating Digitizer and Case





- Insert the plastic opening tool between the digitizer and the case.
- Place the spudger in the gap created by the plastic opening tool to assist in separation.

Step 2

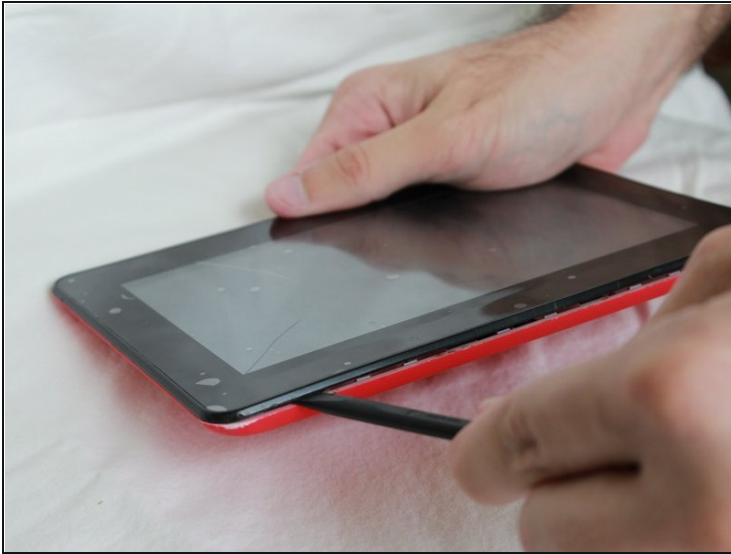

- Slide the spudger along the perimeter of the device to fully separate the two pieces.

Step 3 — Wifi Antenna

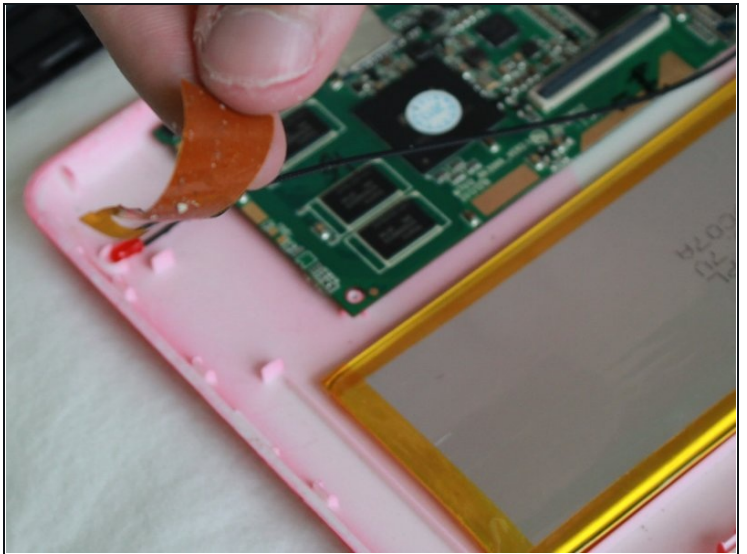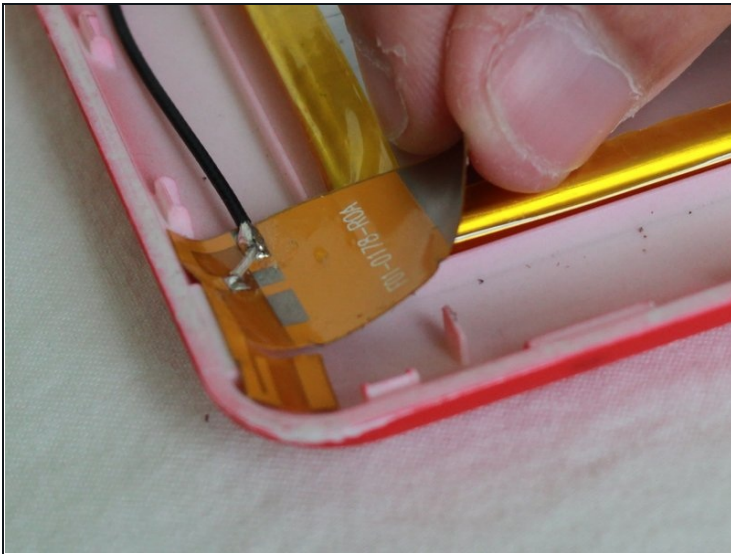

- Peel off the tape that is attaching the wifi antenna to the case.


Step 4



- Using the soldering iron, heat up the solder that is attaching the antenna to the motherboard.

⚠ The heat from the soldering iron may cause personal injury or damage the internal components of the tablet.

Step 5

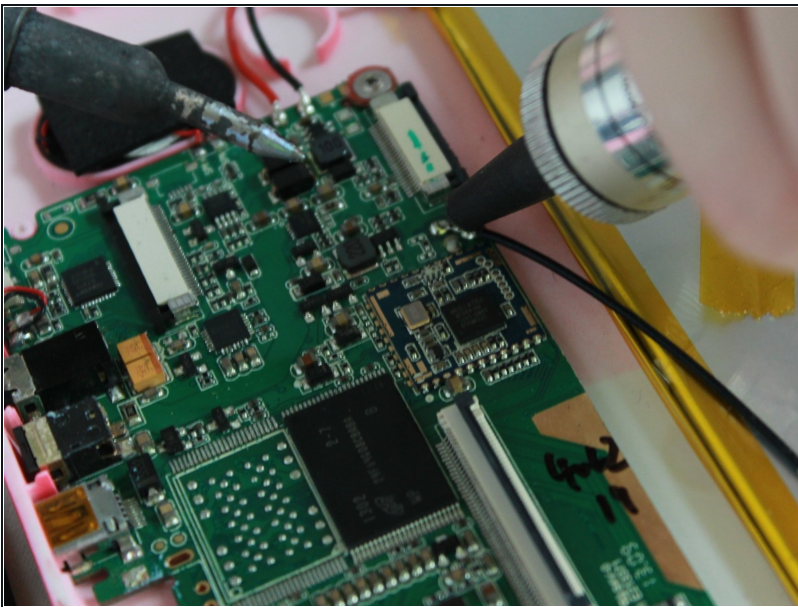

- Suck up the leftover solder using the [desoldering pump](#).
- Remove the wifi antenna from the motherboard.

To reassemble your device, follow these instructions in reverse order.