



# DOPO 10.1 Tablet Screen Replacement

Removal of the necessary components to replace the screen.

Written By: Michael



---

 **TOOLS:**


- [Essential Electronics Toolkit](#) (1)
  - [iOpener](#) (1)
-

## Step 1 — Screen




- Remove back case of tablet by taking spudger tool to lift the back plate.

## Step 2

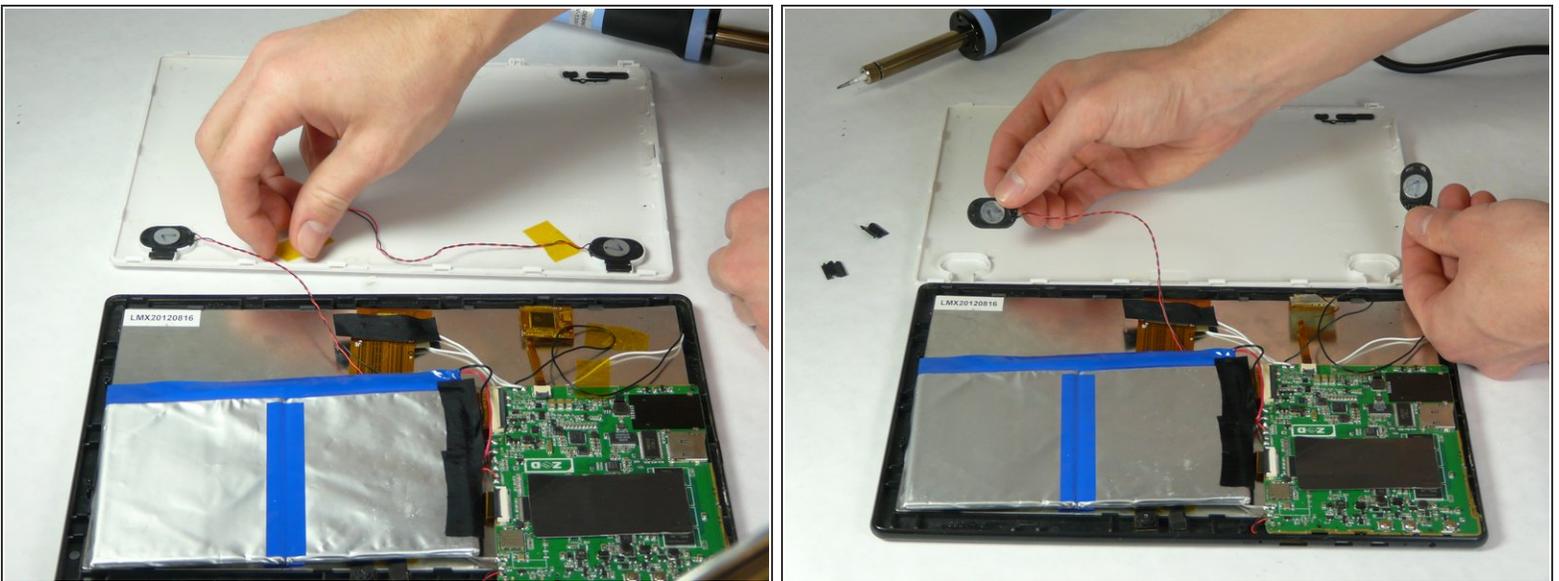



- With caution, unplug speakers from back case of tablet.

### Step 3

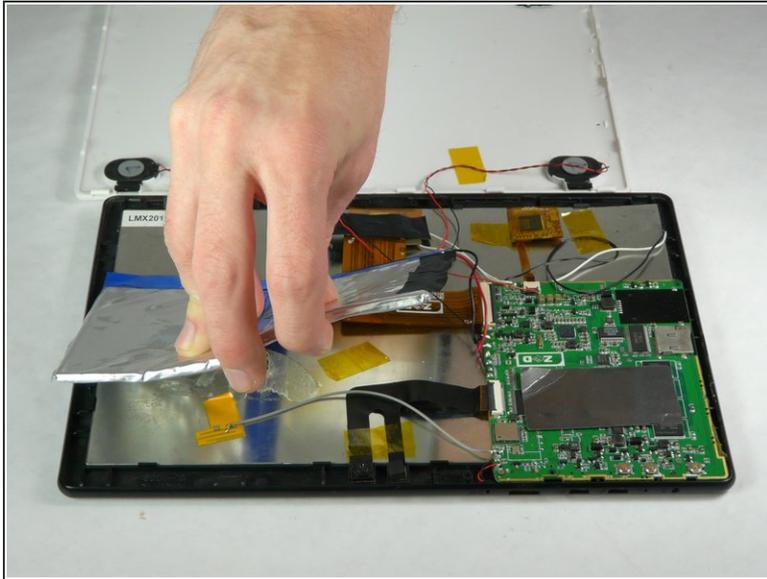

- Remove battery
- Grab and apply light pressure to battery to release it from the back
- Place off to the side carefully. Be sure not to disconnect cables from motherboard

### Step 4

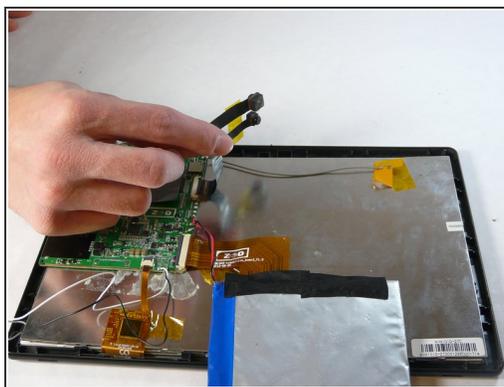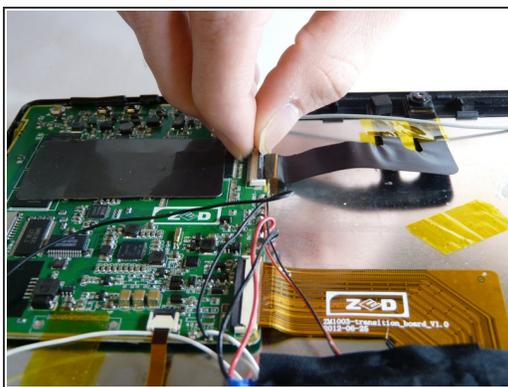


- Locate where the cameras are attached to motherboard
- Now release and remove them from motherboard
- Take camera out and place off to side

## Step 5




- Remove motherboard
- To do this you will have to unscrew a total of 5 .25in phillips head screws

## Step 6

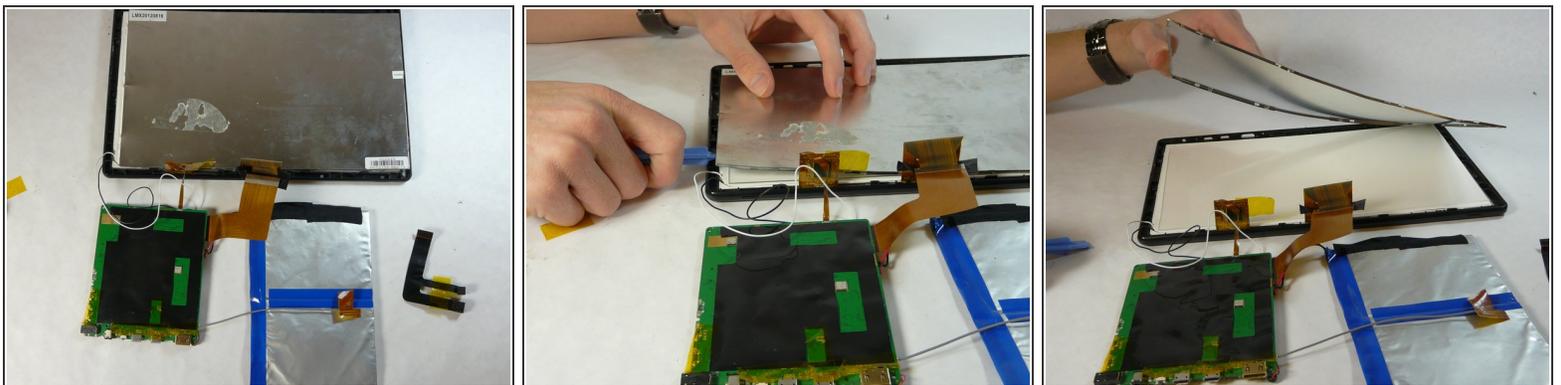


- Remove back metal piece.
- Use plastic pry tool and go around the edges lightly and pop it off.

## Step 7

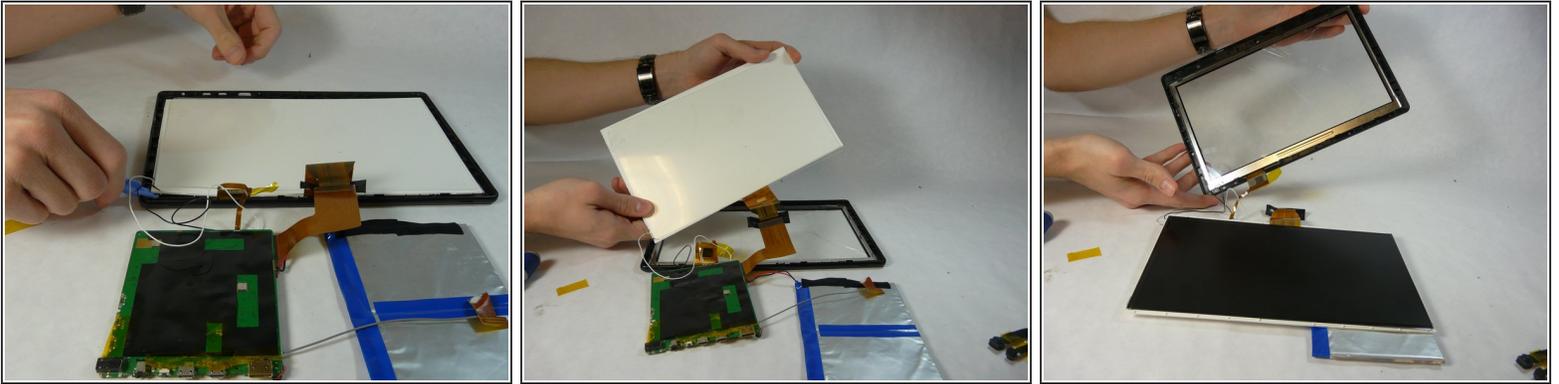

- Using a plastic opening tool, remove the back screen pieces from the back.

## Step 8

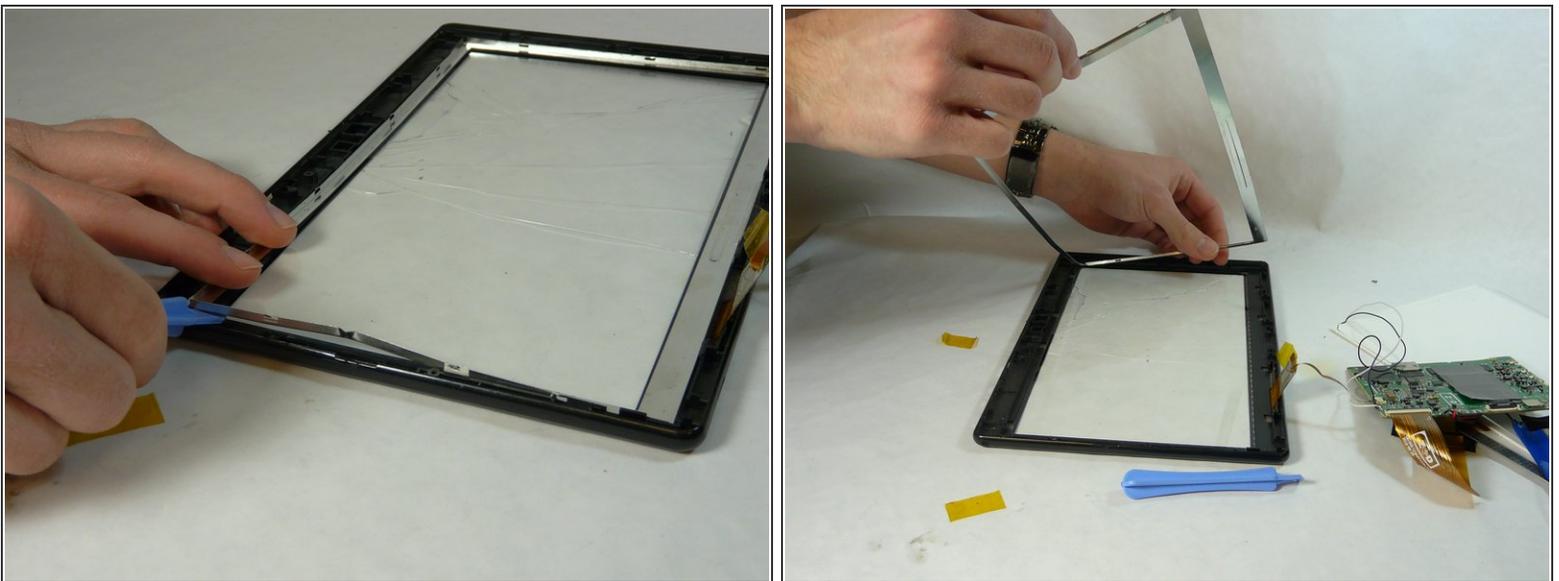

- Using the plastic pry tool remove metal frame.

## Step 9



- Take the iFixit iOpener and place it on the glue
- This will release the glass from the plastic frame

## Step 10



- Carefully remove glass. If glass is already broken use gloves to remove glass.

To reassemble your device, follow these instructions in reverse order.