




Sony Pulse Elite Edition Earpiece Deconstruction

This is a prerequisite guide for earpiece...

Written By: Chris Echter

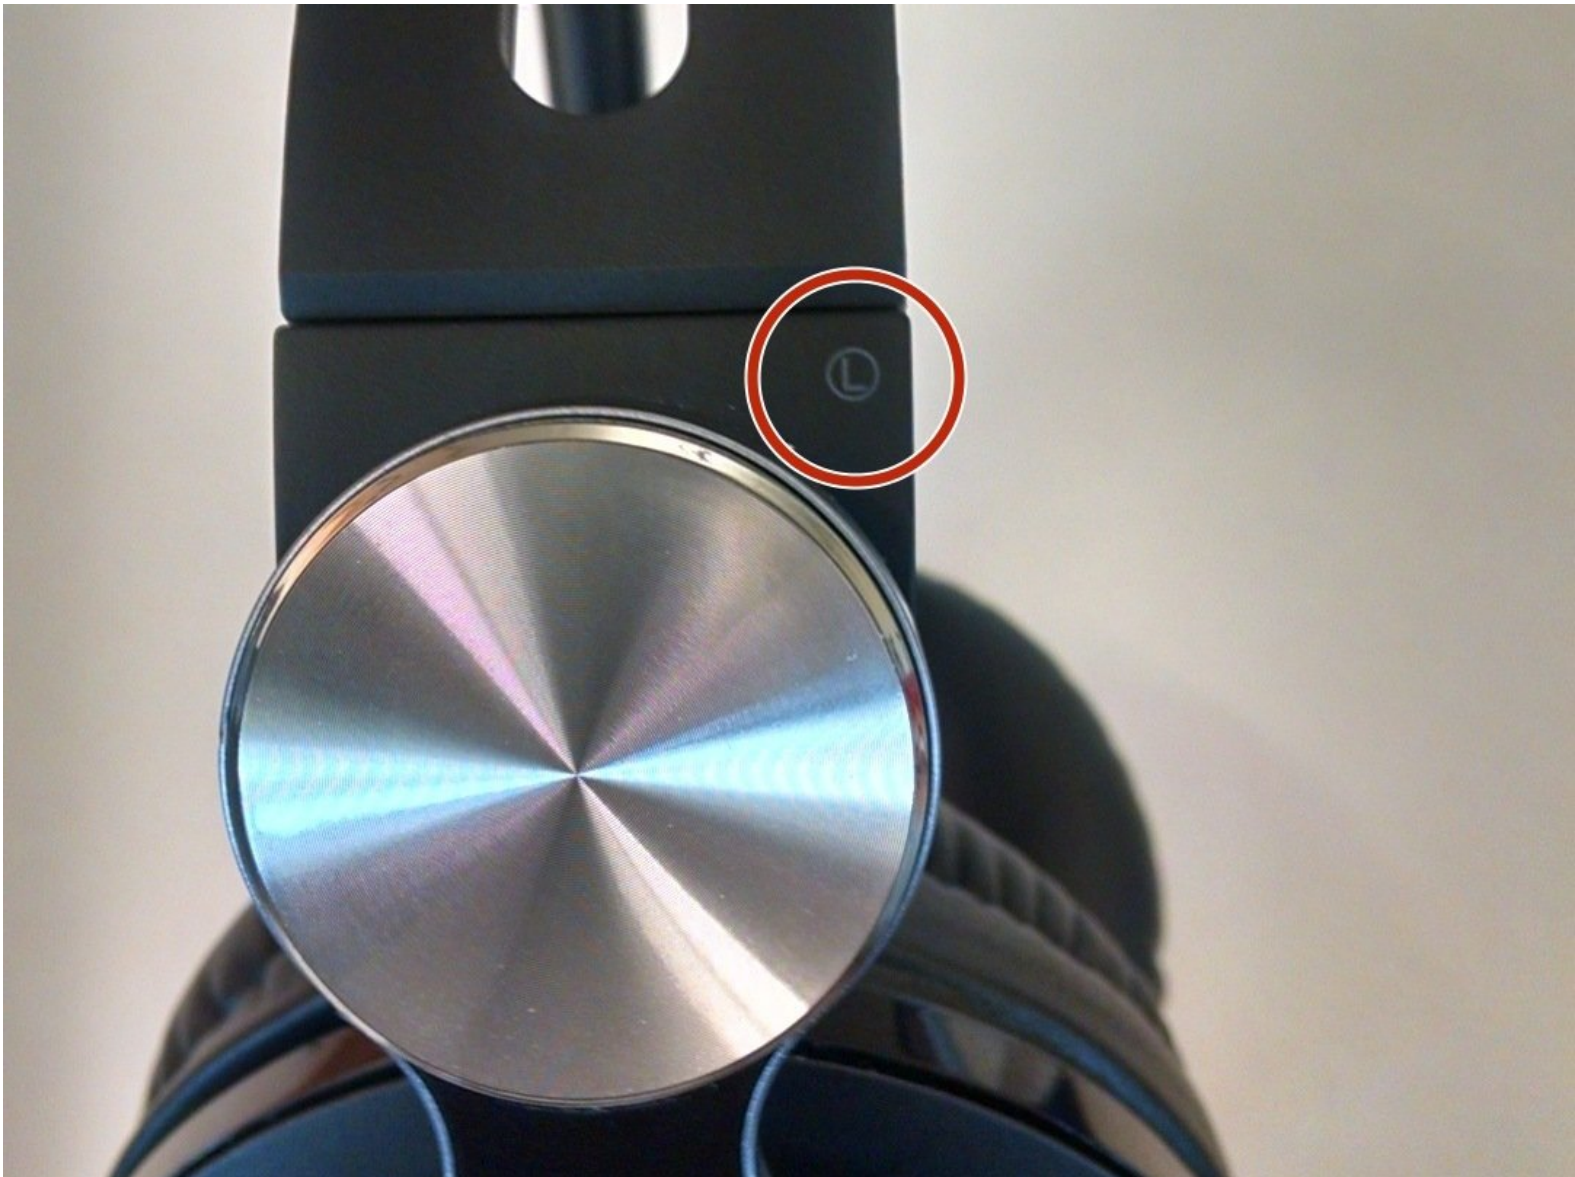

INTRODUCTION


This is a prerequisite guide for earpiece deconstruction that requires soldering. It is necessary for most part replacements, but further guides may or may not have to be used depending on what needs to be fixed.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Identifying Earpiece

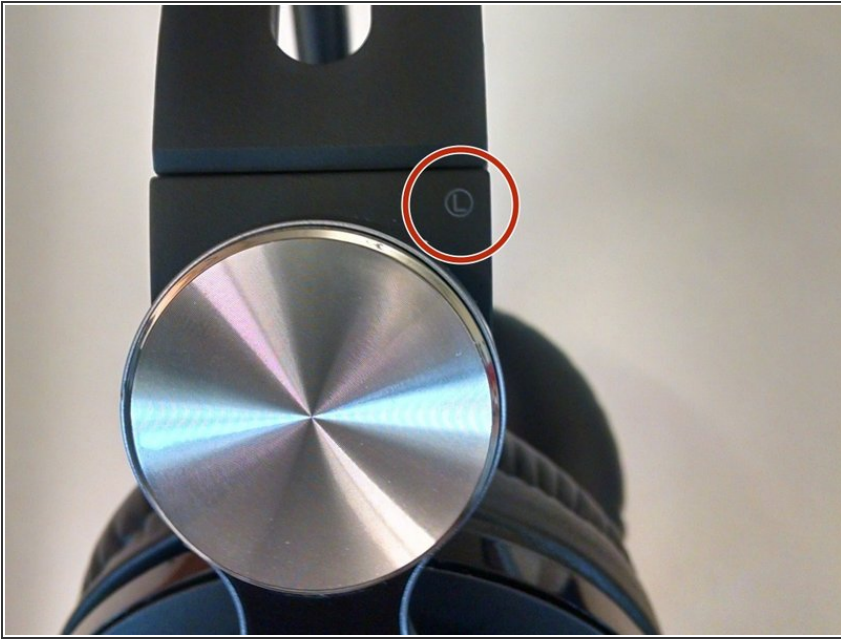


- Locate the left side designation on the headband-earpiece junction.
- The battery is in the right earpiece.
- The motherboard is in the left earpiece.

Step 2 — Ear Cushion Removal

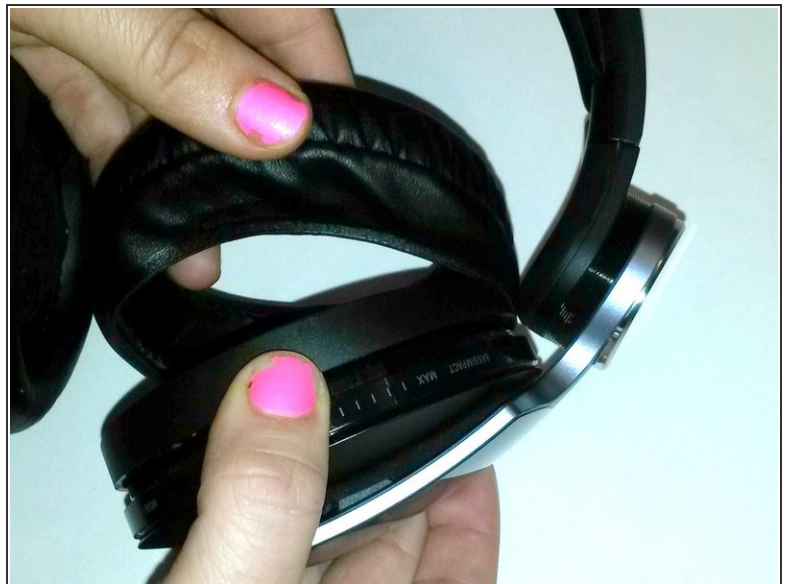

- Gently pull around the perimeter of the left ear cushion until it comes off.

Step 3 — Outer Ear Rim Removal

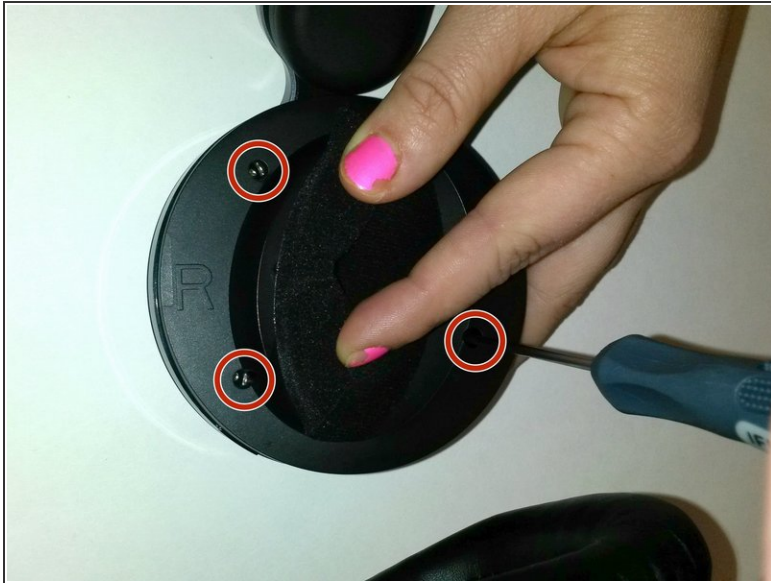

- Use the PH00 Screwdriver to remove the three Phillips 6mm screws around the perimeter of the ear cup.
- Gently pull the outer ear rim off of the headset assembly.

⚠ Harsh removal may cause permanent damage to the speaker wires.

Step 4 — Remove Speaker Housing



- Using tweezers, gently pry the red and black speaker wires from the attached socket.

To reassemble your device, follow these instructions in reverse order.