



HTC Desire V Midframe Replacement

This guide will teach you to remove the middle cover of the HTC Desire V smartphone.

Written By: William McCusker



INTRODUCTION

This guide will teach you to remove the middle cover of the HTC Desire V smartphone, the one between the battery cover and the chassis.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)

PARTS:

- [HTC Desire V Middle Cover](#) (1)
-

Step 1 — Battery



- Gently pry back cover away from phone.

i If you are having difficulty you may need to use a Spudger or plastic opener.


Step 2



- Lever the battery out from the bottom end first.

! Do not bend or puncture the battery.

Step 3 — Midframe

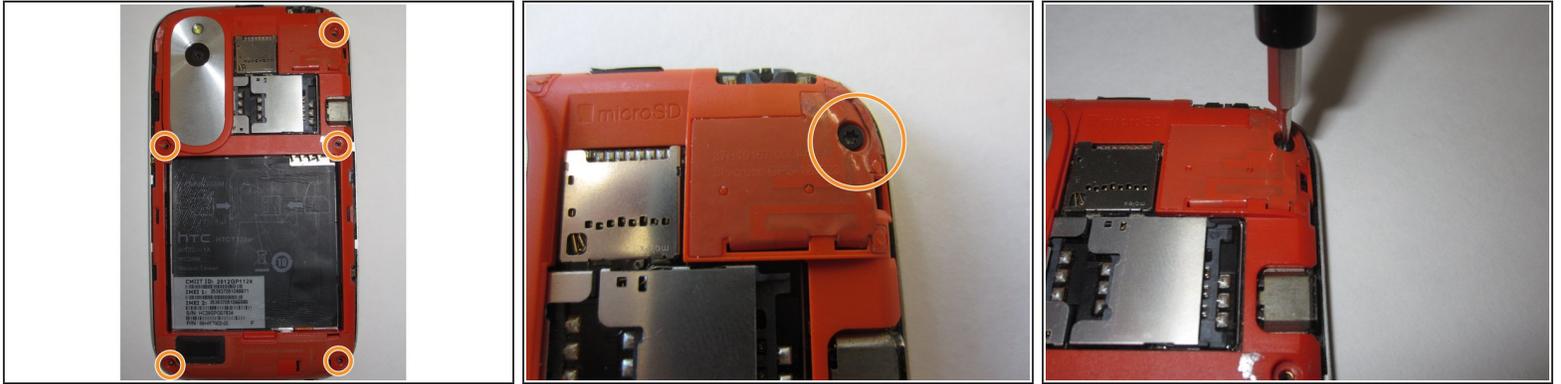

- Use a Torx T5 screwdriver to unscrew and remove five 3.0 mm screws from the rear frame.

Step 4



- Use an opening tool or a spudger to gently remove the rear frame.

To reassemble your device, follow these instructions in reverse order.