



Meizu MX3 Screen Replacement

Screen replacement (without frame)

Written By: Feyris



INTRODUCTION

Screen replacement (without frame)

TOOLS:


- [Essential Electronics Toolkit \(1\)](#)
-

Step 1 — Screen




- Remove the back panel, and unscrew everything to remove the second back panel. Some screws are longer than others. But I mixed them without issue. Here I saw the solution for the network issue: the little contacts between the motherboard and screen were bended.
- I removed the battery, but I think it's not mandatory. If you do, be careful, it's very well glued, and there are some wires behind.

Step 2

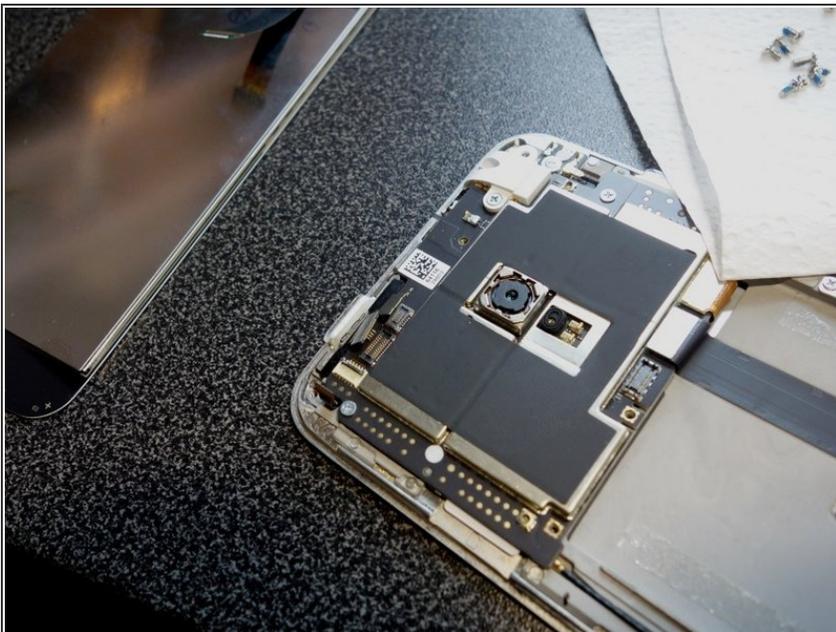


- Unplug all the connectors to the motherboard, including the two antennas. The small flat ribbon in the corner is a little tricky; you have to switch the black part of the connector, not the white one like some other similar I saw before.

Step 3

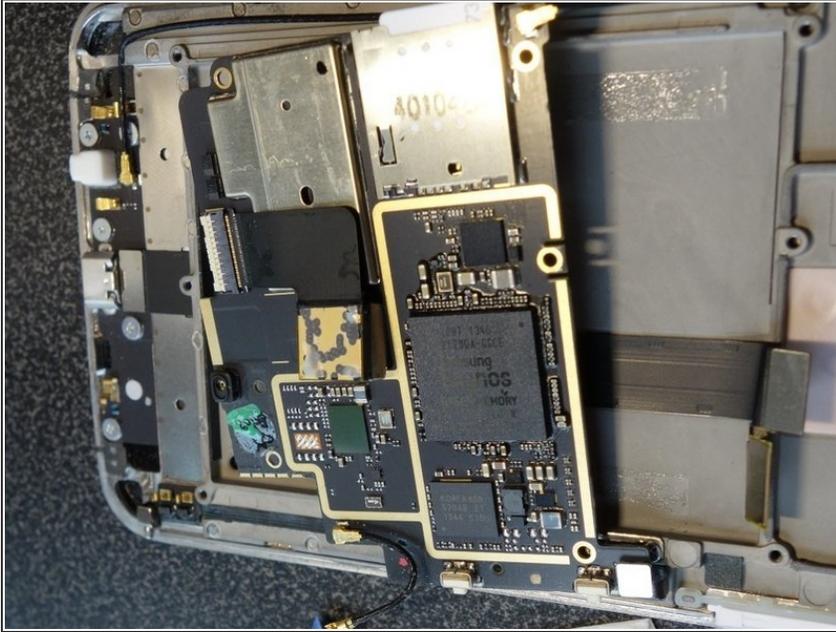

- Remove the jack connector, removes the last screws (mark the placement for later)
- Remove the motherboard, starting by the upper part: There is a last connector to unplug at the bottom, behind.

Step 4

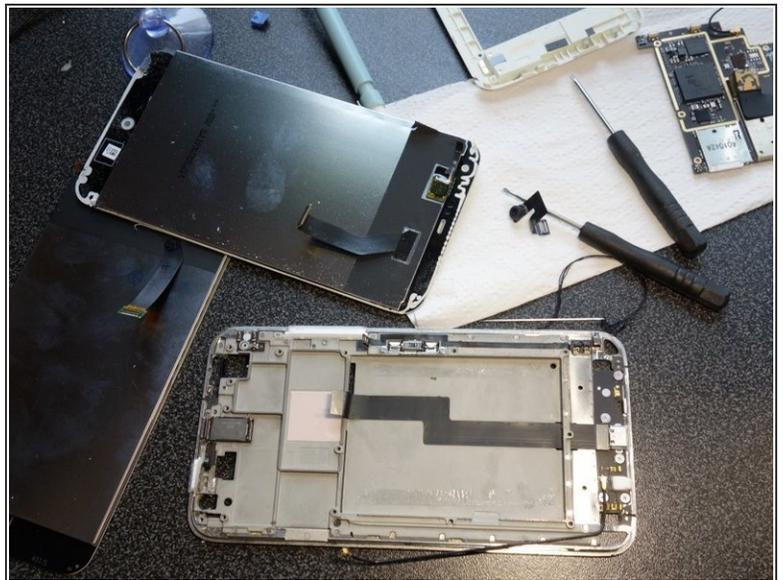

- Now, remove the old screen. It's glued, try to lift a corner, then with a plastic tool, unglue everything.
- Clean the glue inside the metal part.

Step 5



- Put some adhesive (or some glue?) I used thin double-sided tape I had cut the right shape. the side of the screen are less than 1mm wide, it's hard to do here...

Step 6



- Put the screen in the frame, and put everything back in place.
- Voila!

To reassemble your device, follow these instructions in reverse order.