




Matsunichi MarquisPad MP977 Battery Replacement

Written By: Evan Campbell



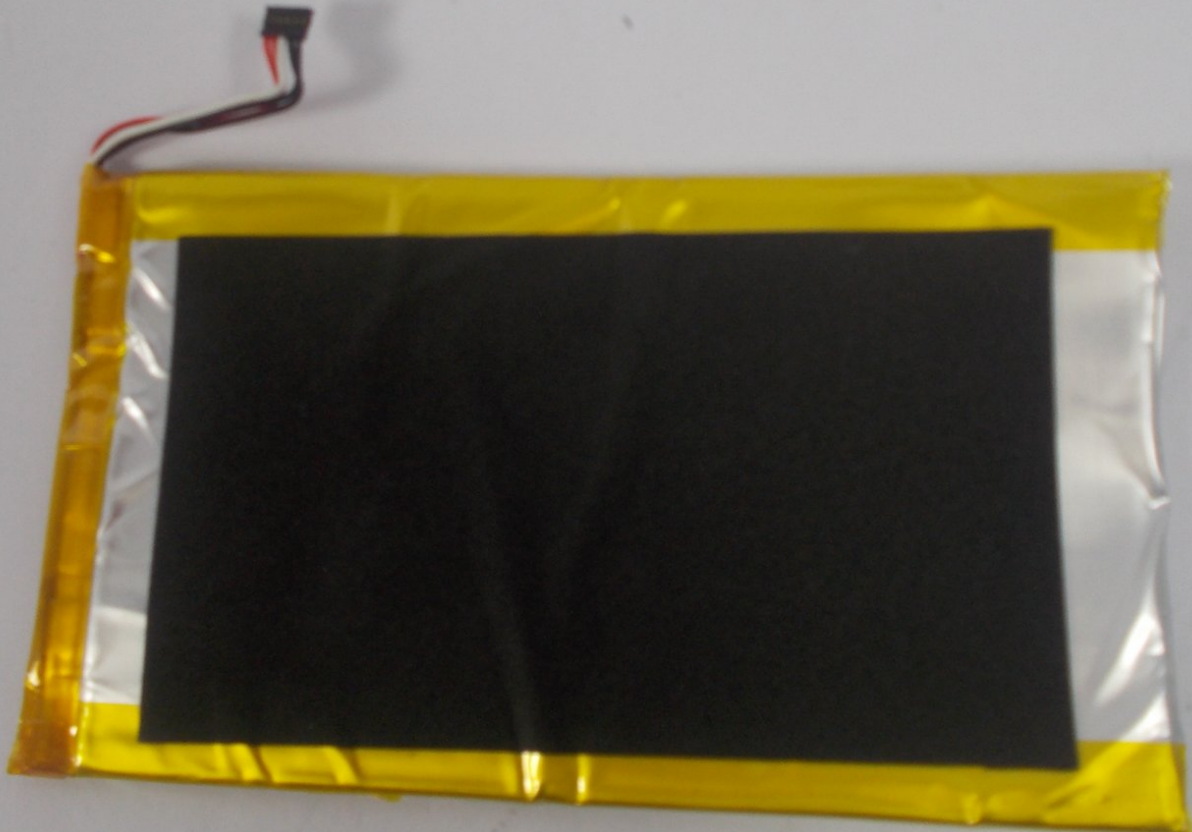

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tool](#) (1)
-

Step 1 — Battery



- Remove the two screws using a Phillips #00 screwdriver.

Step 2



- Place the device face down on a flat surface.
 - Insert one of the wide-tipped, plastic opening tools into the top of the left speaker slot.
 - ⚠ Be sure to avoid puncturing the covering of the speaker.
- Pry the back plate open and slide the tool in a clockwise direction, moving it along the opening between the device and its back plate until you reach the power button.

Step 3





- Insert the opening tool into the right speaker slot.
- Pry open the back plate, and slide the tool counterclockwise along the device until you reach the charging port.

Step 4



- Remove the back plate and place it to the side.

Step 5

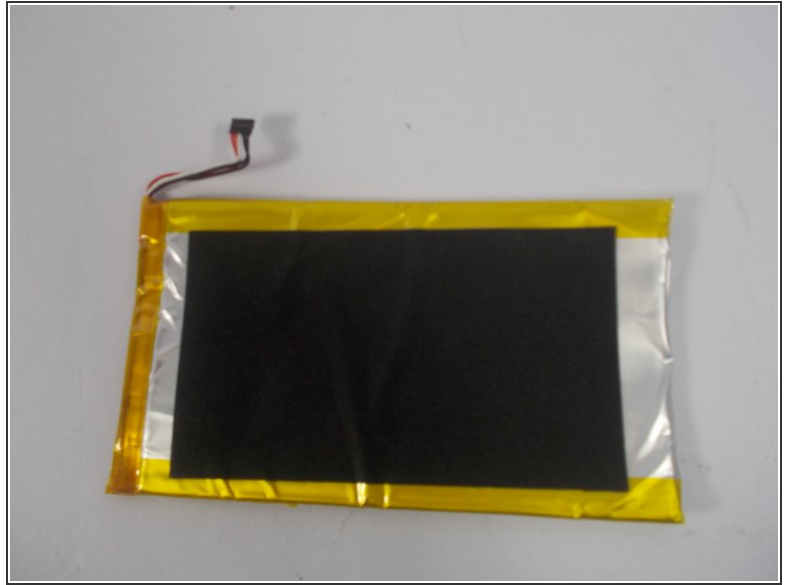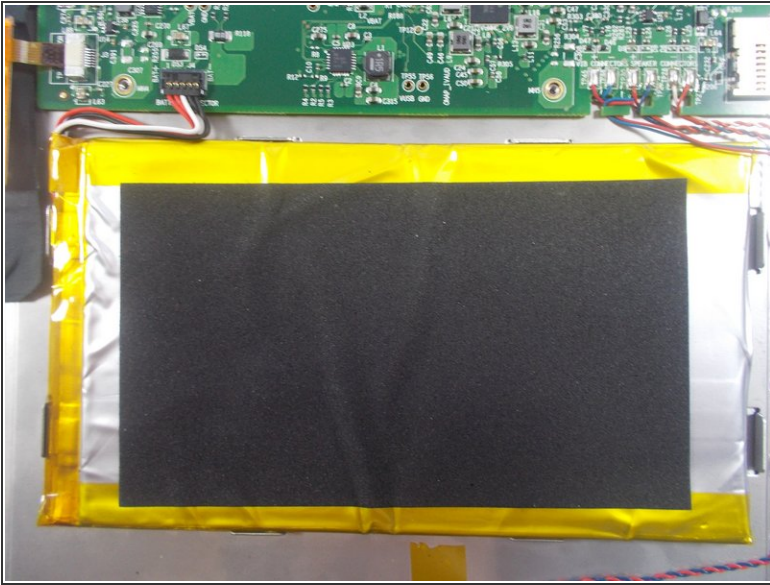

- Detach the battery from the motherboard.

To reassemble your device, follow these instructions in reverse order.